

architectural
collection.

HOFF LIGHT

architectural collection
indoor & outdoor 26-27

professional catalogue

HOFF LIGHT

Illumination for all possibilities

index

about		005
collections		
	indoor	
	fixed downlights	025
	adjustable downlights	057
	trimless downlights	083
	modular downlights	087
	ceiling mounted	095
	pendant	109
	step lights	117
	reading lights	125
	wall lights	135
	3 phases spotlights	145
	monza 24V system	163
	assen 48V system	171
	led panels	185
	industrial	187
	outdoor	
	portable lamps	195
	recessed downlights	203
	surface fixtures	207
	wall lights	215
	floor washers	253
	spotlights	265
	inground fixtures	279
	bollards	297
drivers		313
symbology		321
colours		322
general conditions of sale		323
guarantee policy		323
reference index		327

Illumination for all possibilities our way of understanding light.

Our purpose is to illuminate everyday life with solutions that are accessible, versatile and timeless. We seek to transform the functional into the welcoming, bridging technology and people, design and use, space and life.

At HOFF LIGHT, we simplify technology to create atmospheres that endure over time. We exist to make this dialogue accessible, through products that combine precision, availability and a timeless design language.

This catalogue marks the beginning of a new chapter: we place in your hands not just luminaires, but a set of tools designed to accompany, inspire and make everyday spaces truly habitable.





Illumination for all possibilities
nuestra forma de entender la luz.

Nuestro propósito es iluminar la vida cotidiana con soluciones accesibles, versátiles y atemporales. Buscamos transformar lo funcional en acogedor, tendiendo un puente entre tecnología y personas, entre diseño y uso, entre espacio y vida.

En HOFF LIGHT simplificamos la tecnología para crear atmósferas que perduren en el tiempo. Existimos para hacer este diálogo accesible, a través de productos que combinan precisión, disponibilidad y un lenguaje de diseño atemporal.


Este catálogo marca el inicio de una nueva etapa: ponemos en vuestras manos no solo luminarias, sino un conjunto de herramientas pensadas para acompañar, inspirar y hacer que los espacios cotidianos sean verdaderamente habitables.

Illumination for all possibilities
notre manière de comprendre la lumière.

Notre vocation est d'illuminer le quotidien avec des solutions accessibles, polyvalentes et intemporelles. Nous cherchons à transformer le fonctionnel en accueillant, à établir un pont entre la technologie et les personnes, le design et l'usage, l'espace et la vie.

Chez HOFF LIGHT, nous simplifions la technologie pour créer des atmosphères qui résistent au temps. Nous existons pour rendre ce dialogue accessible, à travers des produits qui allient précision, disponibilité et un langage de design intemporel.

Ce catalogue marque le début d'un nouveau chapitre: nous mettons entre vos mains non pas seulement des luminaires, mais un ensemble d'outils conçus pour accompagner, inspirer et rendre les espaces du quotidien véritablement habitables.



We believe in closeness as a way to build trust, and in guidance as the true value of our relationship with professionals. Accessibility defines our approach: products with quality and timeless design within everyone's reach, always available when the project requires. Each luminaire reflects a commitment to simplicity and honesty, designed to integrate into the present and endure over time.

Guidance

Lighting projects
Lighting calculations (Dialux)
Luminaire layout plans (Autocad)
Energy saving analysis

Accessibility

Available stock
Fast delivery (24-48h)
Competitive prices

Closeness

Continuous support
Direct communication
Customer-centered approach

Timelessness

Minimalist designs
Functional technology

Creemos en la cercanía como forma de construir confianza y en el acompañamiento como el verdadero valor de nuestra relación con los profesionales. La accesibilidad define nuestro enfoque: productos con calidad y diseño atemporal al alcance de todos, siempre disponibles cuando el proyecto lo requiere.

Cada luminaria refleja un compromiso con la simplicidad y la honestidad, pensada para integrarse en el presente y resistir al paso del tiempo.

Acompañamiento

Proyectos de iluminación
Cálculos de iluminación (Dialux)
Planos de distribución de luminarias (Autocad)
Análisis de ahorro energético

Accesibilidad

Stock disponible
Entrega rápida (24-48h)
Precios competitivos

Cercanía

Soporte continuo
Comunicación directa
Enfoque centrado en el cliente

Atemporalidad

Diseños minimalistas
Tecnología funcional

Nous croyons en la proximité comme moyen de créer la confiance, et dans l'accompagnement comme véritable valeur de notre relation avec les professionnels. L'accessibilité définit notre approche : des produits de qualité, au design intemporel, à la portée de tous et toujours disponibles quand le projet l'exige.

Chaque luminaire reflète un engagement envers la simplicité et l'honnêteté, conçu pour s'intégrer au présent et résister à l'épreuve du temps.

Accompagnement

Projets d'éclairage
Calculs d'éclairage (Dialux)
Plans de répartition des luminaires (Autocad)
Analyse des économies d'énergie

Accessibilité

Stock disponible
Livraison rapide (24-48h)
Prix compétitifs

Proximité

Support continu
Communication directe
Approche centrée sur le client

Intemporalité

Designs minimalistes
Technologie fonctionnelle

Technology at the service of the user

We are driven by the idea of making light more approachable, functional and available. At HOFF LIGHT, innovation is not an end in itself but a means: we focus on solutions that translate technology into simple gestures, facilitating specification and installation, simplifying complexity, and offering intuitive control.

We design systems that integrate naturally into architecture, balancing precision, efficiency, and usability, to improve the daily work of professionals and the experience of those who inhabit the spaces. Our technology is accessible, reliable and practical, supporting the project without complications, always at the service of the user's experience.

Tecnología al servicio del usuario

Nos mueve la idea de hacer la luz más cercana, más funcional y más disponible. En HOFF LIGHT la innovación no es un fin, sino un medio: apostamos por soluciones que traducen la tecnología en gestos simples, facilitando la prescripción y la instalación, simplificando lo complejo y ofreciendo control intuitivo.

Diseñamos sistemas que se integran con naturalidad en la arquitectura, equilibrando precisión, eficiencia y usabilidad, para mejorar el día a día de quienes proyectan y habitan los espacios. Nuestra tecnología se hace accesible, confiable y práctica, apoyando el proyecto sin complicaciones, y siempre al servicio de la experiencia del usuario.

La technologie au service de l'utilisateur

Nous sommes animés par l'idée de rendre la lumière plus proche, plus fonctionnelle et plus disponible. Chez HOFF LIGHT, l'innovation n'est pas une fin en soi, mais un moyen : nous proposons des solutions qui traduisent la technologie en gestes simples, facilitant la prescription et l'installation, simplifiant la complexité et offrant un contrôle intuitif.

Nous concevons des systèmes qui s'intègrent naturellement dans l'architecture, équilibrant précision, efficacité et ergonomie, afin d'améliorer le quotidien des professionnels et l'expérience des personnes qui occupent les espaces. Notre technologie est accessible, fiable et pratique, soutenant le projet sans complications et toujours au service de l'expérience utilisateur.



dual switch
multipower
multicolour
zoom
smart light

Lighting is constantly evolving, opening new opportunities to make it more efficient, responsible and environmentally conscious. At HOFF LIGHT, we embrace this transformation with a real commitment: to create a positive impact every day, ensuring our products combine performance, safety and respect for the environment.

Sustainability is not an addition; it is part of the quality we guarantee, together with reliability and durability, so that every project delivers value today without compromising the future.

Renewable Energy

Photovoltaic energy installation at our headquarters

Material Optimization

International Certifications

ISO 9001 in quality management

ISO 14001 in environmental management

Compliance with Safety and Efficiency Standards

CB

Retilap

CMIM

50.000 lifespan

+7.70% paper/cardboard

-16.19% LDPE

-4% HDPE

-15.56% EPS

+53% compostables





La iluminación evoluciona constantemente, abriendo nuevas oportunidades para hacerla más eficiente, responsable y respetuosa con el entorno. En HOFF LIGHT abrazamos esta transformación con un compromiso real: generar un impacto positivo día a día, asegurando que nuestros productos combinen rendimiento, seguridad y respeto por el entorno. La sostenibilidad no es un añadido, es parte de la calidad que garantizamos junto con la fiabilidad y la durabilidad de nuestros productos, para que cada proyecto aporte valor en el presente sin comprometer el futuro.

Energía renovable
 Instalación de energía fotovoltaica en nuestra sede central
 Optimización de materiales
 Certificaciones internacionales
 ISO 9001 en gestión de calidad
 ISO 14001 en gestión ambiental
 Cumplimiento de normativas de seguridad y eficiencia
 CB
 Retilap
 CMIM

L'éclairage évolue constamment, offrant de nouvelles opportunités pour le rendre plus efficace, responsable et respectueux de l'environnement. Chez HOFF LIGHT, nous embrassons cette transformation avec un engagement réel : générer un impact positif au quotidien, en veillant à ce que nos produits allient performance, sécurité et respect de l'environnement. La durabilité n'est pas un ajout ; elle fait partie de la qualité que nous garantissons, ainsi que de la fiabilité et de la durabilité, afin que chaque projet apporte de la valeur dans le présent sans compromettre l'avenir.

Énergie renouvelable
 Installation d'énergie photovoltaïque dans notre siège
 Optimisation des matériaux
 Certifications internationales
 ISO 9001 en gestion de la qualité
 ISO 14001 en gestion environnementale
 Conformité aux normes de sécurité et d'efficacité
 CB
 Retilap
 CMIM



RETILAP

indoor

fixed
downlights

update



vienna · 025



qatar · 029

new



florence · 031

laos · 033

libertad · 035

stuttgart · 037

quito · 039

bath · 041

boston · 043

bangkok · 045

vietnam · 047

norway · 049

egypt · 053

lima · 055

adjustable
downlights



luxembourg · 057

new



hawaii · 059



bonn · 61



libertad adj. · 063



amsterdam · 065



osaka · 067

new



capri · 069

new



andorra zoom · 071

update



andorra · 075



palermo · 077

update



taiwan · 079




colombia · 081



trimless
downlights

new



mini zermatt · 083

update



zermatt · 083



modular
downlights

update



mini malta · 087



malta · 089



ceiling
mounted



ibiza 15 sensor · 095




ibiza · 095



brussels · 097



nepal · 099

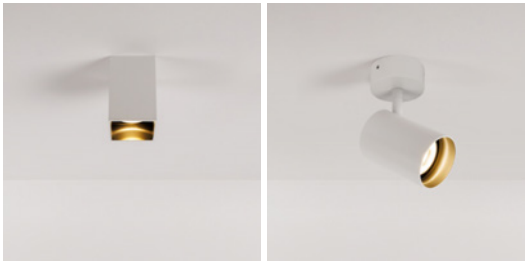

bogota · 103



bogota · 103



pendant

update



bologna · 109

update



pisa · 111




bogota · 113




brussels · 097


step
lights



madeira . 117



lisbon . 121




algarve . 122




sintra . 123


reading
lights




iceland . 125

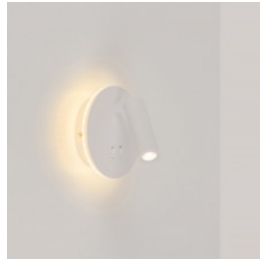

england . 127



usa . 129

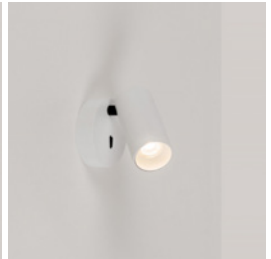


bogota s . 131

new




trinidad . 133


wall
lights



crete . 135



greece . 137

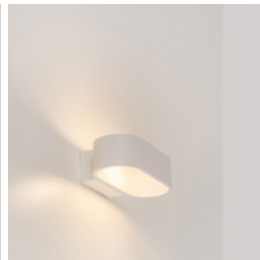

copenhagen . 139



cali . 141

3 phase
spotlights



tokyo . 145



japan . 149



berlin . 151



portugal . 153



bonn . 155



bogota . 157



tracks 3 phases . 159


monza 24V
system



monza 4 & 8 . 163



monza 3 tube pendant . 163

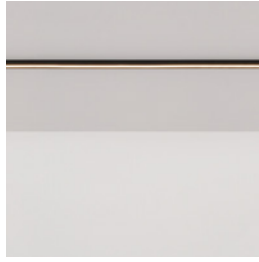

monza 6 line opal . 163



monza 12 lens . 163



tracks monza . 167

assen 48V
system



assen . 171



assen 10 double . 171



assen 15 colors . 171




assen zoom . 171




assen 10 pendant . 171



assen 16 lens . 171



assen 16 opal . 171



tracks assen . 176

led
panels



canada . 185

industrial



finland . 187



update

poland . 189

outdoor

portable
lamps



split . 195




malmö . 197



sweden . 199

recessed
downlights



graz . 203



romania . 205

surface
fixtures



denmark . 207




lithuania . 209



helsinki . 211

wall
lights




glasgow . 215



scotland . 219



guinea . 221




benin . 223




dubai . 225




zambia . 227

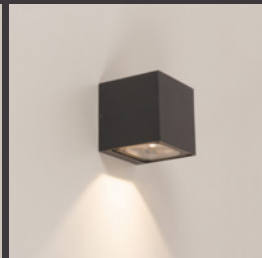

ghana . 229

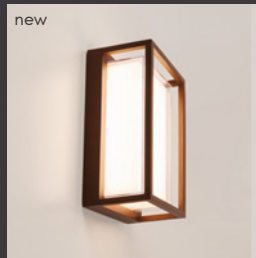

costa rica . 231

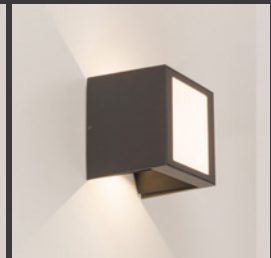


oslo . 233




palma . 235



chile . 237

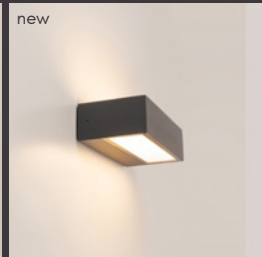

bilbao . 239



panama . 241



kyoto . 243




jamaica . 245




russia . 247

spotlights

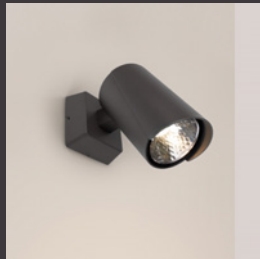


cuba base . 249




new

ecuador . 251

floor washers




uruguay . 253




new

estepona . 255




bergen recessed . 257




new

bergen surface . 257



update


athens recessed . 259



update

athens surface . 259


spotlights



cancun . 265



cuba . 267



new

mexico . 269



belgium . 271




cannes . 273




update

haiti . 275




netherlands . 277

inground
fixtures



cancun . 279



bulgaria . 281



morocco . 283



bern . 285



switzerland . 287



zürich . 289



serbia . 291



ireland . 293




hungary . 295

bollards



dublin . 297

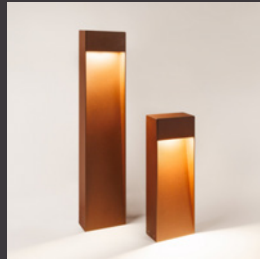

stockholm . 299



aalborg . 301




versailles . 303




belize . 305



cyprus . 307

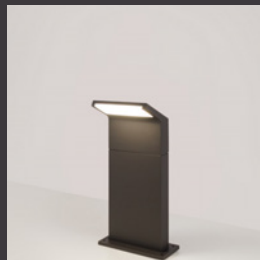

jamaica . 309

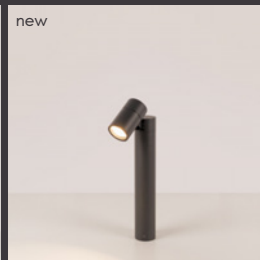

ecuador . 311

new

indoor collection

Phonebooth 1

Phonebooth 2

The HOFF LIGHT Indoor collection invites you to discover light as an ally of interior spaces. Each luminaire combines simplicity, functionality and high-quality materials, designed to support projects where minimalist, timeless design meets practicality. Our solutions aim to simplify the daily work of those who design and inhabit the spaces, adapting naturally to any interior environment.

Timeless design:

minimalist, elegant, and adaptable to any interior space.

Technology at the service of the user:

features like Zoom, Double Switch (power and color temperature) and quick connections make light intuitive and accessible.

High-quality materials:

ensuring durable and reliable luminaires.

La colección Indoor de HOFF LIGHT es una invitación a descubrir la luz como aliada del espacio interior. Cada luminaria combina simplicidad, funcionalidad y materiales de calidad, pensada para acompañar proyectos donde el diseño minimalista y atemporal se encuentra con la practicidad. Nuestras soluciones buscan facilitar el día a día de quienes proyectan y habitan los espacios, adaptándose con naturalidad a cualquier entorno interior.

La collection Indoor de HOFF LIGHT vous invite à découvrir la lumière comme alliée des espaces intérieurs. Chaque luminaire combine simplicité, fonctionnalité et matériaux de haute qualité, conçu pour accompagner des projets où le design minimaliste et intemporel se rencontre avec la praticité. Nos solutions visent à faciliter le quotidien de ceux qui conçoivent et occupent les espaces, en s'adaptant naturellement à tout environnement intérieur.



ceiling
recessed

fixed downlights	vienna.	25
	qatar.	29
	florence.	31
	laos.	33
	libertad.	35
	stuttgart.	37
	quito.	39
	bath.	41
	boston.	43
	bangkok.	45
	vietnam.	47
	norway.	49
adjustable downlights	egypt.	53
	lima.	55
	luxembourg.	57
	hawaii.	59
	bonn.	61
	libertad adj.	63
	amsterdam.	65
	osaka.	67
	capri.	69
	andorra zoom.	71
	andorra.	75
	palermo.	77
taiwan.	79	
colombia.	81	
trimless downlights	zermatt.	83
modular downlights	mini malta.	87
	malta.	89

ceiling recessed
surface
suspension
wall
track lights
panels & industrial
table
ceiling
wall
floor



vienna.

With a minimalist presence and three size options. Vienna is designed as a discreet point of light that hides its source. It delivers maximum visual comfort by eliminating glare and preserving the purity of the space. Perfect for refined interiors where light should be felt, not seen.



ceiling recessed

surface

suspension

wall

track lights

panels & industrial

table

ceiling

wall

floor

vienna.

mini downlight

With a minimalist presence and three size options. Vienna is designed as a discreet point of light that hides its source. It delivers maximum visual comfort by eliminating glare and preserving the purity of the space. Perfect for refined interiors where light should be felt, not seen.



	W	mA	K	Real lm	▲
vienna 2					
● 1.1040.0111	2	700	2700	150	24°
● 1.1040.0112	2	700	3000	160	24°
● 1.1040.0211	2	700	2700	130	24°
● 1.1040.0212	2	700	3000	140	24°
vienna 5					
● 1.1041.0111	3 5	350 500	2700	240 380	24°
● 1.1041.0112	3 5	350 500	3000	250 400	24°
● 1.1041.0211	3 5	350 500	2700	220 350	24°
● 1.1041.0212	3 5	350 500	3000	230 370	24°
vienna 10					
● 1.1042.0111	7 10	350 500	2700	600 855	24°
● 1.1042.0112	7 10	350 500	3000	630 900	24°
● 1.1042.0211	7 10	350 500	2700	590 845	24°
● 1.1042.0212	7 10	350 500	3000	620 890	24°

DRIVERS ON-OFF

	W	mA	V
for vienna 2			
* 4.1013.1304	3	700	100-240
* 4.3043.1101	3	700	100-240
for vienna 5			
4.1011.1303	3,5	350	100-240
4.1032.1103	2,5-5	500	200-240
for vienna 5 . 10			
* 4.3069.1101 EU	3-22	125-500	200-240
for vienna 10			
4.1069.1101	21	150-500	200-240

DRIVERS DALI & PUSH

	W	mA	V
for vienna 5 . 10			
4.1069.6104	0,2-15	100-700	200-240
* 4.1069.6103	7-29	150-700	220-240


ACCESSORIES

		▲
● 1.1041.8003	Lens for vienna 5	36° 1
● 1.1042.8001	Lens for vienna 10	15° 1
● 1.1042.8003	Lens for vienna 10	36° 1
● 1.1042.8004	Lens for vienna 10	50° 1



1

* Instalación driver en techo registrable.
Driver installation in accessible ceiling.
Installation du driver dans un plafond accessible.

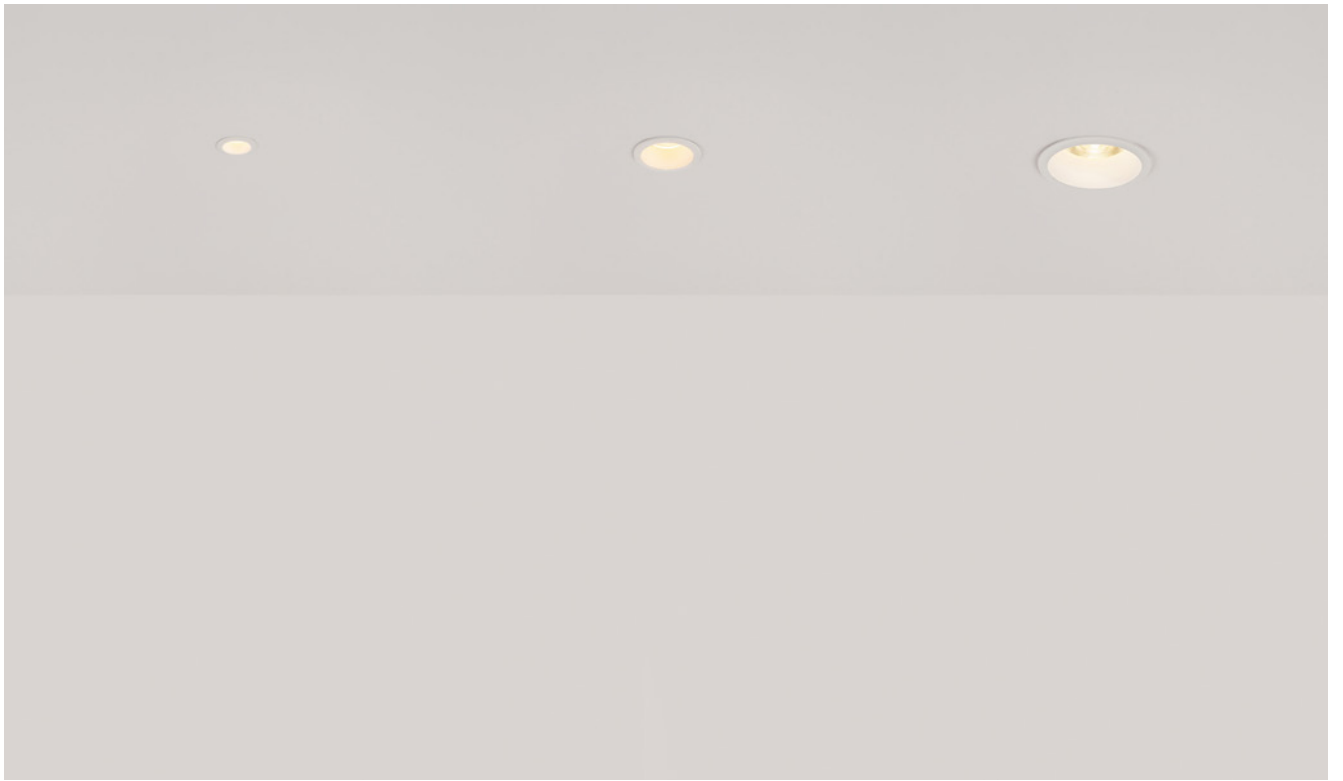


vienna 2
 CUT OUT Ø19 mm
 MIN. HEIGHT 40 mm



vienna 5
 CUT OUT Ø35 mm
 MIN. HEIGHT 70 mm



vienna 10
 CUT OUT Ø60 mm
 MIN. HEIGHT 100 mm





qatar.

Qatar offers uniform light and a clean integration into the ceiling. Made of aluminum and featuring UGR<17, it incorporates the Quick Fix system that speeds up installation, reducing on-site time while ensuring a neat finish in any space.



	W	mA	K	Real lm	▲
qatar 8					
● 1.1060.0112	8	200	3000	740	24°
● 1.1060.0212	8	200	3000	740	24°
qatar 12					
● 1.1061.0112	12	300	3000	985	24°
● 1.1061.0212	12	300	3000	985	24°

DRIVERS ON-OFF

	W	mA	V
for qatar 8			
4.3069.1101	EU	3-22	125-500



	W	mA	V
for qatar 8 . 12			
4.1069.1101		21	150-500
4.3069.1101	EU	3-22	125-500



DRIVERS DALI & PUSH

	W	mA	V
for qatar 8			
4.3069.6102	EU	5,5-22	125-500

	W	mA	V
for qatar 8 . 12			
4.1069.6102		8-42	150-1050

	W	mA	V
for qatar 12			
4.3069.6101	EU	38	300-1050

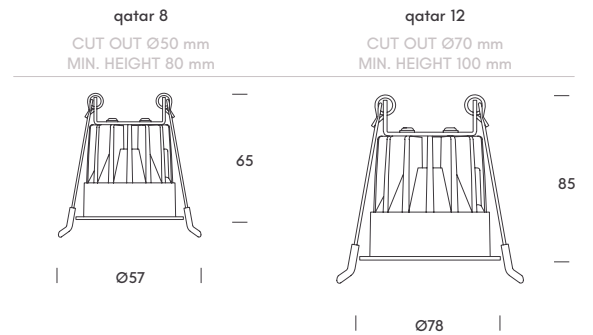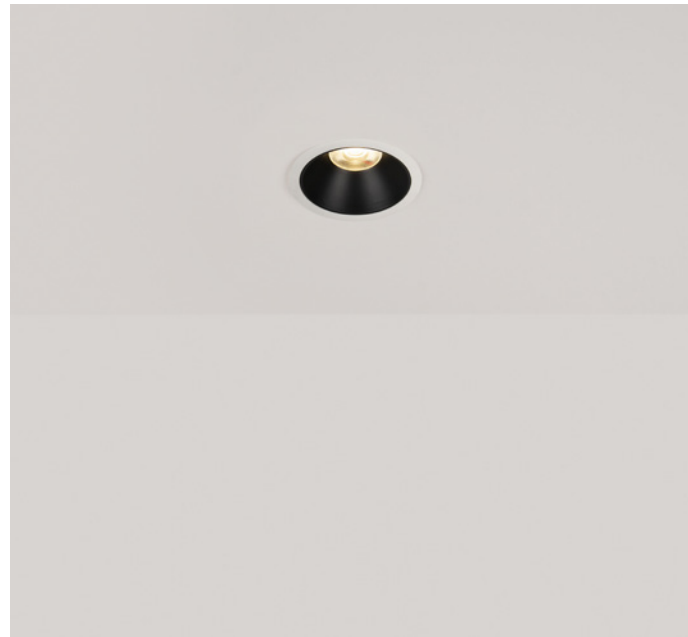

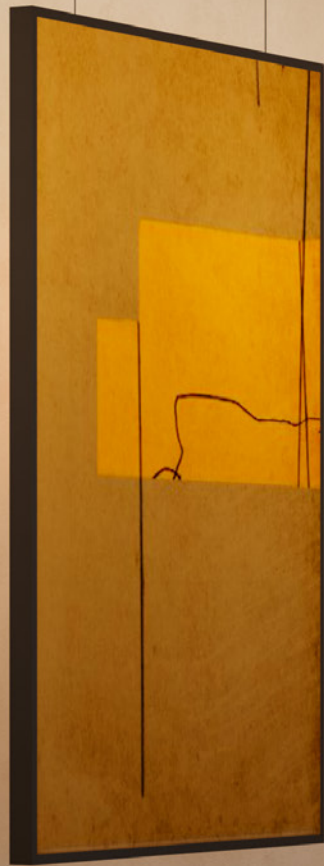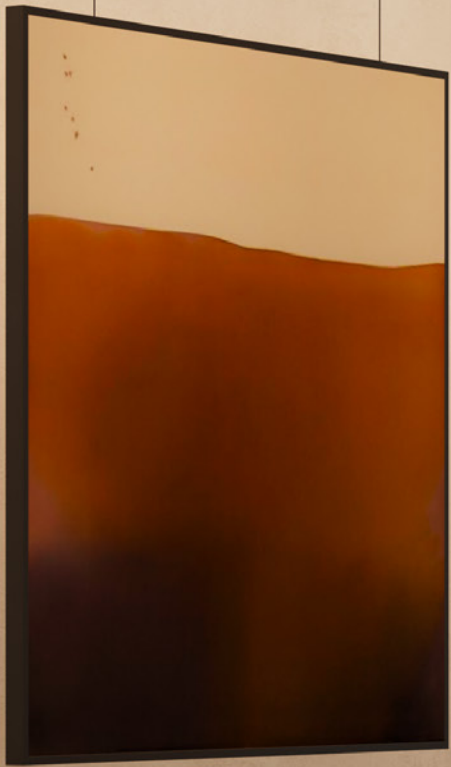

florence.

asym . gen2

Florence is designed to let the wall take center stage. Its asymmetric optic delivers a continuous, controlled wall wash from zero offset, avoiding unwanted shadows or light gaps. Available in two sizes with adjustable color temperature, it adapts to different spaces and exposures, offering a precise and discreet solution for corridors, galleries, and vertical surfaces.



	W	mA	K (2CCT)	Real lm (2K7-3K)	▲
florence 8					
1.1058.0118 (chrome reflector)	8	180	2K7-3K	360-400	asym
florence 12					
1.1059.0118 (chrome reflector)	12	300	2K7-3K	635-700	asym

DRIVERS ON-OFF

	W	mA	V
for florence 8			
4.1031.1109	7,2	180	220-240

for florence 8 . 12

4.1069.1101	6,3-21	150-500	200-240
-------------	--------	---------	---------

for florence 8 . 12

4.3069.1101	EU 5,5-22	125-500	200-240
-------------	-----------	---------	---------

DRIVERS DALI & PUSH

	W	mA	V
for florence 8 . 12			
4.1069.6102	8-42	150-1050	200-240
4.3069.6102	EU 5,5-22	125-500	220-240


for florence 12

4.3069.6101	EU 3-38	300-1050	220-240
-------------	---------	----------	---------



florence 8
CUT OUT Ø55 mm
MIN. HEIGHT 88 mm

florence 12
CUT OUT Ø75 mm
MIN. HEIGHT 101 mm

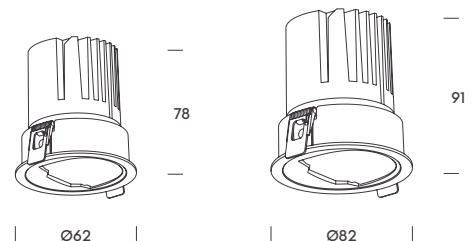

ceiling recessed
surface
suspension
wall
track lights
panels & industrial
table
ceiling
wall
floor

laos.

gen2

Laos gen2 is a versatile downlight family with a minimalist design and slim trim that fits contemporary projects. Available in three sizes (65, 85, and 102 mm) and IP40, it features COB LED technology and DALI dimming, delivering efficiency, aesthetics, and quick, practical installation.



	W	mA	K	Real lm	▲
laos 8					
● 1.1160.0111	8	200	2700	635	24°
● 1.1160.0112	8	200	3000	645	24°
● 1.1160.0114	8	200	4000	685	24°
● 1.1160.0211	8	200	2700	635	24°
● 1.1160.0212	8	200	3000	645	24°
● 1.1160.0214	8	200	4000	685	24°
laos 12					
● 1.1161.0111	12	300	2700	1030	24°
● 1.1161.0112	12	300	3000	1050	24°
● 1.1161.0114	12	300	4000	1115	24°
● 1.1161.0211	12	300	2700	1030	24°
● 1.1161.0212	12	300	3000	1050	24°
● 1.1161.0214	12	300	4000	1115	24°
laos 20					
● 1.1162.0111	20	500	2700	1680	24°
● 1.1162.0112	20	500	3000	1715	24°
● 1.1162.0114	20	500	4000	1820	24°
● 1.1162.0211	20	500	2700	1680	24°
● 1.1162.0212	20	500	3000	1715	24°
● 1.1162.0212	20	500	4000	1820	24°



DRIVERS ON-OFF

	W	mA	V
for laos 8 . 12 . 20			
4.1069.1101	21	150-500	200-240
4.3069.1101	EU	3-22	125-500 200-240

for laos 20

4.3069.1102	EU	15-32	350-725 220-240
-------------	----	-------	-----------------

DRIVERS DALI

	W	mA	V
for laos 8 . 12 . 20			
4.1069.6102	8-42	150-1050	200-240

DRIVERS DALI & PUSH

	W	mA	V
for laos 12			
4.3069.6101	EU	3-38	300-1050 220-240




Starbucks Shopping DelSol, Asunción, Paraguay - Electropar S.A.

ceiling recessed
 surface
 suspension
 wall
 track lights
 panels & industrial
 table
 ceiling
 wall
 floor

laos 8


CUT OUT Ø55 mm
 MIN. HEIGHT 65 mm



Ø65

laos 12


CUT OUT Ø75 mm
 MIN. HEIGHT 85 mm



Ø85

laos 20

CUT OUT Ø90 mm
 MIN. HEIGHT 105 mm



Ø102



libertad.

A downlight family designed to meet the essential needs of any project. With recessed optics and a 60° beam, it ensures high visual comfort (UGR <19), while the rear selector lets you choose between three color temperatures (2700K, 3200K, or 4000K) and dim via TRIAC to suit the moment. Easy to install and available in multiple versions, Libertad delivers reliable, efficient, and elegant lighting day after day, with IP44 front protection for spaces with slight humidity.



	W	K (3CCT)	Real lm (2K7-3K2-4K)	▲
libertad 6				
● 1.1130.7118	6	2K7-3K2-4K	478-545-537	60°
● 1.1130.7218	6	2K7-3K2-4K	424-483-470	60°
libertad 9				
● 1.1131.7118	9	2K7-3K2-4K	737-832-820	60°
● 1.1131.7218	9	2K7-3K2-4K	627-711-695	60°
libertad 12				
● 1.1132.7118	12	2K7-3K2-4K	984-1140-1092	60°
● 1.1132.7218	12	2K7-3K2-4K	840-972-924	60°



libertad 6
CUT OUT Ø68 mm
MIN. HEIGHT 90 mm




libertad 9
CUT OUT Ø90 mm
MIN. HEIGHT 100 mm

libertad 12
CUT OUT Ø120 mm
MIN. HEIGHT 110 mm

Related products



libertad adjustable
page 063

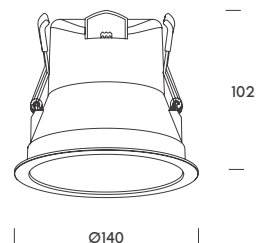








stuttgart.

sensor

Stuttgart Sensor combines intuitive technology with an ultra-slim design for ceilings with limited recess depth. It features motion & light sensor, a front 3CCT Switch (2700K-3000K-4000K) and TRIAC dimming. The white bezel can be swapped for a magnetic black accessory, offering an adaptable aesthetic for hallways, bathrooms or locker rooms.

 IP 44 FRONT
  CRI >80
  DRIVER NO INCL
  TRIAC
  50.000H LIFE
  QUICK FIX
  AL BODY
  CB RETILAP

	W	mA	K (3CCT)	Real lm (2K7-3K-4K)	▲
● 1.1067.0118	6	255	2K7-3K-4K	520-590-580	45°

DRIVERS TRIAC & SENSOR CONTROL


	W	mA	V
4.1031.7101	6	255	200-240

ACCESSORIES

- 1.1067.8001 Iron matt black frame 1



1

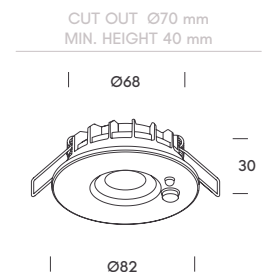



quito.

mini downlight

Quito delivers precision and visual comfort in a compact 50 mm diameter. Its recessed light source (UGR<17) ensures glare-free illumination. With a front IP54 rating, it's the perfect choice for projects seeking subtle and refined lighting in bathrooms, locker rooms or other interior spaces.



	W	mA	K (3CCT)	Real lm (2K7-3K2-4K)	▲
1.1045.0118	5	250	2K7-3K-4K	330-380-410	35°

DRIVERS ON-OFF

	W	mA	V
4.1031.1104	2,5-6	250	220-240
* 4.1069.1101	6-21	150-500	200-240
* 4.3069.1101	EU 3-22	125-500	200-240


DRIVERS DALI & PUSH

	W	mA	V
4.1069.6104	0,2-15	100-700	200-240
* 4.1069.6102	8-42	150-1050	220-240
* 4.3069.6102	EU 5,5-22	125-500	200-240


* Instalación driver en techo registrable.
Driver installation in accessible ceiling.
Installation du driver dans un plafond accessible.

ACCESSORIES

- 1.1045.8001 PC matt white & black passive reflector 1
- 1.1045.8002 PC matt black passive reflector 2



CUT OUT Ø42 mm
MIN. HEIGHT 87 mm





bath.

Bath provides comfortable, uniform lighting, ideal for humid areas such as bathrooms or changing rooms thanks to its front IP54 protection. Its 3CCT Switch lets you easily select the perfect light tone for each project, while its accessories offer extra customization without complicating installation.



	W (multi)	K (3CCT)	Real lm (2K7-3K2-4K)	▲	V
● 1.1063.7118	6 9	2K7-3K2-4K	625-670-650 825-905-855	40°	220-240


ACCESSORIES ▲

● 1.1063.8101	PC matt black frame	-	1
● 1.1063.8001	Aluminium Reflector	60°	2
● 1.1063.8002	PC matt black passive reflector	-	3
● 1.1063.8003	PC matt silver passive reflector	-	4



ceiling recessed
surface
suspension
wall
track lights
panels & industrial
table
ceiling
wall
floor

CUT OUT Ø90 mm
MIN. HEIGHT 87 mm

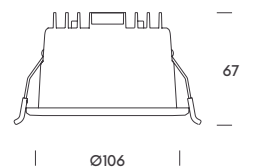



boston.

Boston is designed for environments that demand visual comfort and durability. Its aluminum body and reflector, combined with UGR<19 and CCT Switch, ensure uniform, glare-free light. Available in three sizes, it is a reliable partner for offices and professional spaces.



	W	mA	K (3CCT)	Real lm (2K7-3K2-4K)	▲
boston 10					
1.1145.0118	10	350	2K7-3K2-4K	800-905-870	60°
boston 20					
1.1146.0118	20	700	2K7-3K2-4K	1620-1805-1730	60°
boston 25 . 32					
1.1147.0118	25 32	700 900	2K7-3K2-4K	2275-2535-2520 2565-2900-2730	60°

DRIVERS ON-OFF

	W	mA	V
for boston 10			
4.3069.1101	EU 3-22	125-500	200-240

for boston 20 . 25			
4.3069.1102	EU 15-32	350-725	220-240

for boston 32			
4.3069.1103	EU 14-40	300-1050	200-240

DRIVERS DALI

	W	mA	V
for boston 10 . 20 . 25-32			
4.3049.3102	20	250-700	100-240

DRIVERS DALI & PUSH


	W	mA	V
for boston 10 . 20 . 25-32			
4.3069.6101	3-38	300-1050	240

ACCESSORIES

- 1.1145.8201 Boston 10 frame
- 1.1146.8201 Boston 20 frame
- 1.1147.8201 Boston 30 frame




boston 10
CUT OUT Ø90 mm
MIN. HEIGHT 80 mm



Ø114

boston 20
CUT OUT Ø145 mm
MIN. HEIGHT 100 mm



Ø174

boston 25 . 32
CUT OUT Ø195 mm
MIN. HEIGHT 120 mm



Ø232



bangkok.

Bangkok combines the resilience of an IP65 downlight with a refined design that integrates CCT Switch and interchangeable trims in white, aluminum, or black. With a metal body, TRIAC dimming, and three color temperatures (2700K, 3200K, or 4000K), it is a robust solution for humid environments without sacrificing aesthetics.

 IP 65 FRONT ·
  CRI >80 ·
  UGR <19 ·
  DRIVER INCL ·
  PF >0,9 ·
  TRIAC ·
 35.000H LIFE ·
 METAL BODY ·
 PC DIFFUSER ·
 CB · RETILAP


	W	K (3CCT)	Real lm (2K7-3K2-4K)	▲	V
● 1.1066.7118	6	2K7-3K2-4K	490-570-545	60°	220-240


ACCESSORIES

- 1.1066.8001 Black ring 1
- 1.1066.8002 Chrome ring 2




CUT OUT Ø70 mm
MIN. HEIGHT 80 mm

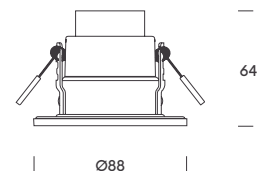

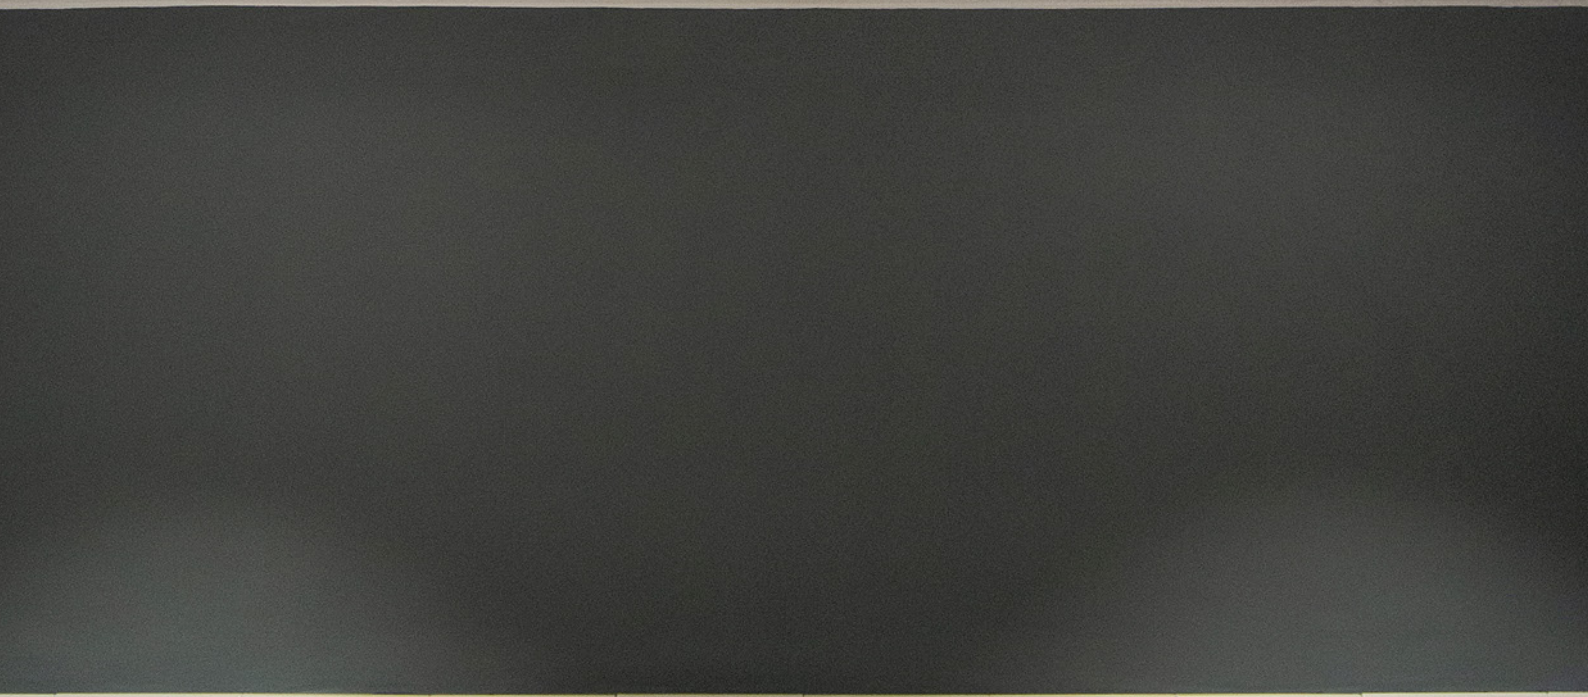

vietnam.

With its ultra-slim design and IP65 front, Vietnam is designed for low-ceiling applications where space is limited but technical and aesthetic demands remain high. Its silicone seal ensures durability and reliability in humid environments, providing versatility without compromising discretion.



	W	mA	K	Real lm	▲
1.1065.0111	8	200	2700	680	36°
1.1065.0112	8	200	3000	840	36°

DRIVERS ON-OFF


	W	mA	V
4.1069.1101	21	150-500	220-240
4.3069.1101	EU 3-22	125-500	200-240

DRIVERS DALI & PUSH

	W	mA	V
4.3069.6102	EU 5,5-22	125-500	200-240



CUT OUT Ø68 mm
MIN. HEIGHT 65 mm

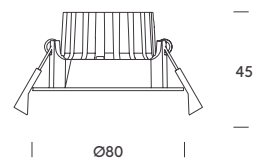



dentibela

norway.

Norway gen2 is a compact downlight family, available in round or square versions, with recessed diffuser and CCT Switch. With IP65 front protection and a 100° beam angle, it provides visual comfort and balanced general lighting even in wide spaces with limited depth.

Dentibela Dental Clinic, Castellón, Spain . Vitale Studio



floor

wall

ceiling

table

panels & industrial

track lights

wall

suspension

surface

ceiling recessed

norway.

gen2

Norway gen2 is a compact downlight family, available in round or square versions, with recessed diffuser and CCT Switch. With IP65 front protection and a 100° beam angle, it provides visual comfort and balanced general lighting even in wide spaces with limited depth.



	W	mA	K (3CCT)	Real lm (2K7-3K2-4K)	▲
norway round 9					
1.1110.0118	9	250	2K7-3K2-4K	935-1035-1040	100°
norway round 15					
1.1111.0118	15	350	2K7-3K2-4K	1435-1575-1580	100°
norway round 20					
1.1112.0118	20	500	2K7-3K2-4K	1925-2135-2140	100°
norway square 9					
1.1115.0118	9	250	2K7-3K2-4K	905-1005-1010	100°
norway square 15					
1.1116.0118	15	350	2K7-3K2-4K	1335-1490-1495	100°
norway square 20					
1.1117.0118	20	500	2K7-3K2-4K	1940-2165-2170	100°


DRIVERS ON-OFF

	W	mA	V
for norway 9 . 20			
4.3069.1101 EU	3-22	125-500	200-240
for norway 9 . 15 . 20			
4.1069.1101	21	150-500	200-240
for norway 15 . 20			
4.3069.1101 EU	3-22	125-500	200-240


DRIVERS DALI & PUSH

	W	mA	V
for norway 9 . 15 . 20			
4.1069.6102	8-42	150-1050	220-240
for norway 20			
4.3069.6101	3-38	300-1050	220-240


norway round 9
CUT OUT Ø112 mm
MIN. HEIGHT 70 mm




norway round 15
CUT OUT Ø145 mm
MIN. HEIGHT 72 mm




norway round 20
CUT OUT Ø165 mm
MIN. HEIGHT 75 mm




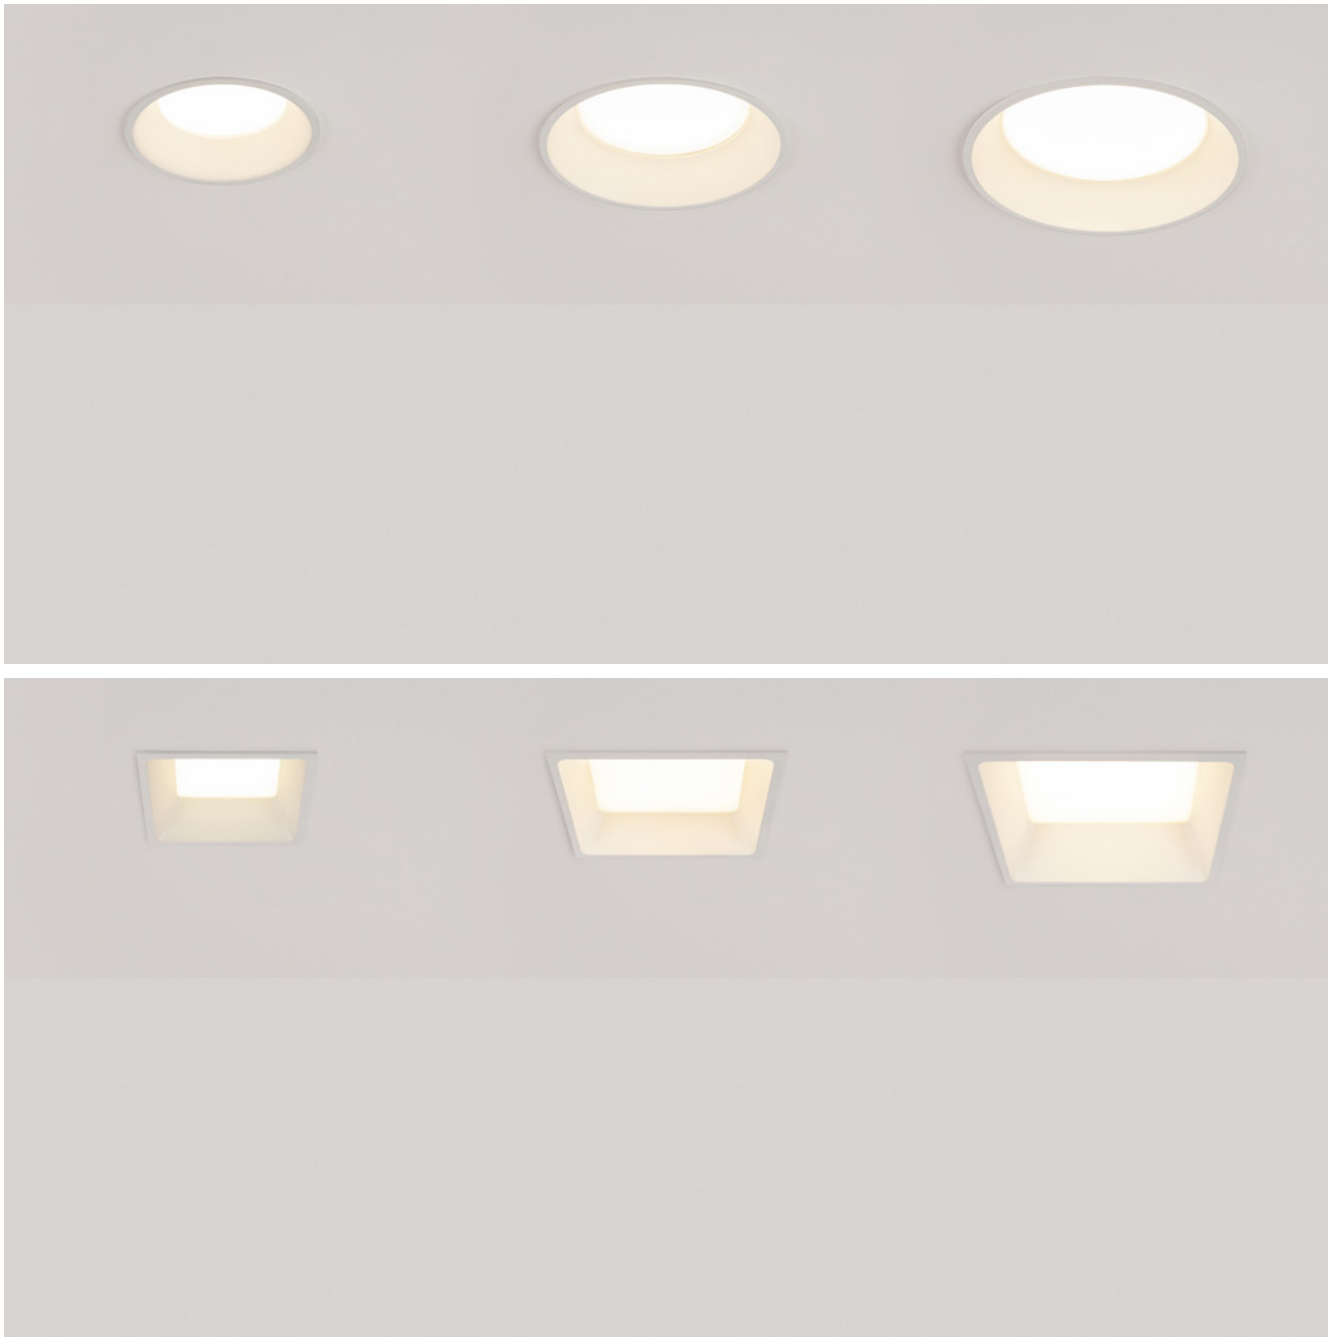


norway square 9
 CUT OUT 105x105 mm
 MIN. HEIGHT 70 mm



norway square 15
 CUT OUT 135x135 mm
 MIN. HEIGHT 75 mm



norway square 20
 CUT OUT 160x160 mm
 MIN. HEIGHT 75 mm

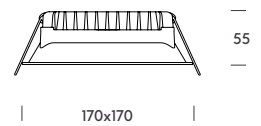



egypt.

super slim

Egypt is a compact family of rectangular downlights, designed to combine efficiency and elegance. Available in 5W, 10W and 15W versions, it features COB LED technology and an aluminium reflector for uniform, controlled light. The recessed light source (UGR<19) prevents glare, ensuring comfort in walkways, tables or shelves, both in retail and residential spaces.



	W	mA	K	Real lm	▲
egypt 5					
● 1.1005.0112	5	500	3000	480	35°
● 1.1005.0212	5	500	3000	480	35°
egypt 10					
● 1.1006.0112	2x5	500	3000	970	35°
● 1.1006.0212	2x5	500	3000	970	35°
egypt 15					
● 1.1007.0112	3x5	500	3000	1450	35°
● 1.1007.0212	3x5	500	3000	1450	35°

DRIVERS ON-OFF


	W	mA	V
for egypt 5			
4.1032.1103	2,5-5	500	200-240

for egypt 5 . 10 . 15


4.1069.1102	3-42	300-1050	220-240
4.3069.1101	EU 3-22	125-500	200-240

DRIVERS DALI & PUSH


	W	mA	V
for egypt 10 . 15			
4.3069.6102	EU 5,5-22	125-500	220-240

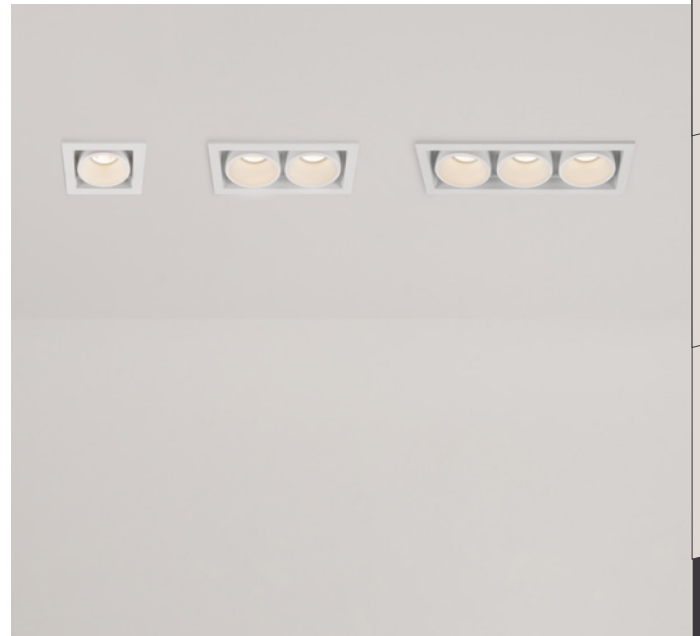


egypt 5
CUT OUT 50x50 mm
MIN. HEIGHT 55 mm



egypt 10
CUT OUT 50x90 mm
MIN. HEIGHT 55 mm



egypt 15
CUT OUT 50x135 mm
MIN. HEIGHT 55 mm

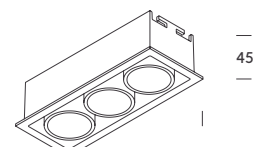

ceiling recessed
surface
suspension
wall
track lights
panels & industrial
table
ceiling
wall
floor



lima.

super thin

Lima, available in 3 and 5 LED module versions, is our most subtle linear downlight family. At just 3cm wide, it delivers precise accent lighting with high visual comfort. Perfect for seamless integration in projects that value clean, refined ceilings.



	W	mA	K	Real lm	▲
lima 6					
● 1.1015.0111	3x2	300	2700	450	30°
● 1.1015.0211	3x2	300	2700	450	30°
lima 10					
● 1.1016.0111	5x2	300	2700	750	30°
● 1.1016.0211	5x2	300	2700	750	30°


DRIVERS ON-OFF

	W	mA	V
for lima 6			
4.1031.1105	2,5-6	300	220-240
for lima 6 . 10			
* 4.1069.1101	21	150-500	200-240
* 4.3069.1101	EU 3-22	125-500	200-240
for lima 10			
4.1031.1107	9-12	300	220-240

DRIVERS DALI & PUSH

	W	mA	V
for lima 6 . 10			
* 4.3069.6101	EU 3-38	300-1050	220-240

* Instalación driver en techo registrable.
Driver installation in accessible ceiling.
Installation du driver dans un plafond accessible.

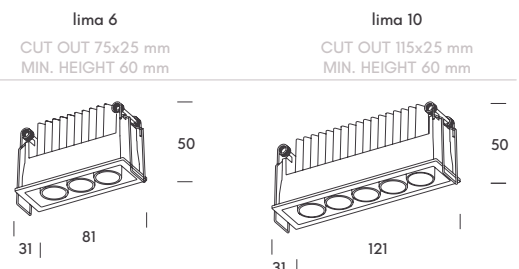


ceiling recessed
surface
suspension
wall
wall
track lights
panels & industrial
table
ceiling
wall
floor



luxembourg. adjustable

Luxembourg combines elegance and precision: a 10° beam with CRI>90, 30° tilt, and an aluminum body. Available in two sizes (38 and 48 mm), it delivers refined accent lighting for projects that demand the highest light quality.




	W	mA	K	Real lm	▲
luxembourg 3					
1.1050.0111	3	700	2700	125	10°
1.1050.0112	3	700	3000	132	10°
luxembourg 5					
1.1051.0111	5	1050	2700	206	10°
1.1051.0112	5	1050	3000	217	10°

DRIVERS ON-OFF

for luxembourg 3	W	mA	V
4.1013.1304	3	700	100-240
4.3043.1101	EU 3	700	100-240

for luxembourg 5	W	mA	V
4.1015.1101	2-4	1000	100-240

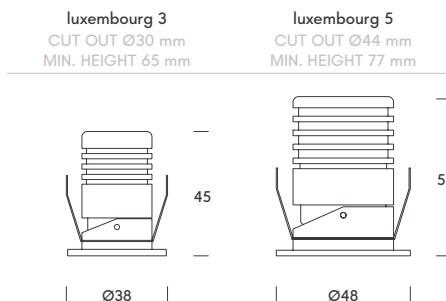

ceiling recessed
surface
suspension
wall
track lights
panels & industrial
table
ceiling
wall
floor



hawaii.

tiltable

Hawaii is a family of downlights created to shape spaces where visual comfort comes first. Its key feature is the ability to orient the light through a subtle manual gesture, even after installation, allowing the beam to evolve with the space. Adjustable color temperature and low glare make it ideal for hospitality, lounge areas, and comfort-driven environments.



	W	mA	K (5CCT)	Real lm (2K4-2K7-3K-3K5-4K) ▲	▲
hawaii 8					
● 1.1090.0118	8	200	2K4-2K7-3K-3K5-4K	525-550-580-610-640	25°
● 1.1090.0218	8	200	2K4-2K7-3K-3K5-4K	500-525-550-580-610	25°
hawaii 12					
● 1.1091.0118	12	300	2K4-2K7-3K-3K5-4K	800-845-895-940-990	25°
● 1.1091.0218	12	300	2K4-2K7-3K-3K5-4K	765-805-850-895-940	25°

DRIVERS ON-OFF

	W	mA	V
for hawaii 8 . 12			
4.1069.1101	6,3-21	150-500	200-240

for hawaii 8 . 12			
4.3069.1101	EU	5,5-22	125-500
			200-240


DRIVERS DALI & PUSH

	W	mA	V
for hawaii 8 . 12			
4.1069.6102	8-42	150-1050	200-240
4.3069.6102	EU	5,5-22	125-500
			220-240

for hawaii 12			
4.3069.6101	EU	3-38	300-1050
			220-240



20° tilt with a subtle manual gesture

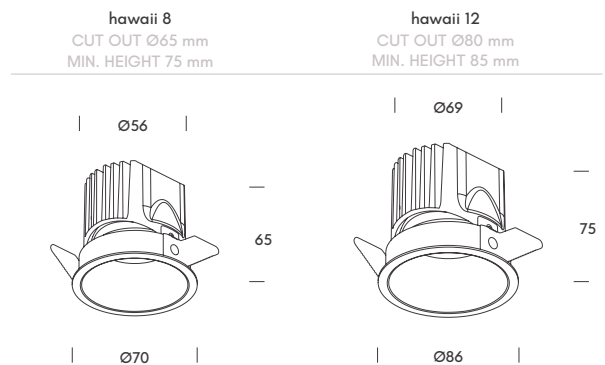


ceiling recessed
surface
suspension
wall
wall
track lights
panels & industrial
table
ceiling
wall
floor



bonn.

adjustable

Compact and efficient, Bonn combines design, performance, and consistent light output. Its optimized cooling system ensures stability, while the CCT Switch allows adjustment of color temperature. Available as a downlight or spotlight, it provides versatile solutions for multiple applications.



	W (multi)	mA	K (3CCT)	Real lm (2K7-3K2-4K)	▲
● 1.1080.0118	14	350		1160-1260-1190	
	20	500	2K7-3K2-4K	1660-1800-1700	30°
	28	700		2325-2520-2380	
● 1.1080.0218	14	350		1160-1260-1190	
	20	500	2K7-3K2-4K	1660-1800-1700	30°
	28	700		2325-2520-2380	

DRIVERS ON-OFF

	W	mA	V
4.3069.1101	EU 3-22	125-500	200-240
4.3069.1102	EU 15-32	350-725	220-240

DRIVERS DALI & PUSH

	W	mA	V
4.1069.6102	8-42	150-1050	220-240
4.3069.6101	EU 3-38	300-1050	220-240

ACCESSORIES

● 1.5035.8001	Lens	20°	1
● 1.5035.8002	Lens	40°	1
● 1.5035.8003	Lens	50°	1
● 1.5035.8101	White ring	-	2
● 1.5035.8005	Honeycomb	-	3




Related products



bonn spotlight
page 155



CUT OUT Ø80 mm
MIN. HEIGHT 120 mm






libertad

adjustable

The adjustable version of the Libertad family combines visual comfort (UGR<19), recessed optics, and a rear selector to choose between three color temperatures (2700K, 3200K, or 4000K). With a practical design, IP44 front protection, and TRIAC dimming, it is the ideal solution for projects requiring a standard round downlight with added flexibility.



	W	K (3CCT)	Real lm (2K7-3K2-4K)	▲	V
libertad 6 Adj.					
● 1.1150.7118	6	2K7-3K2-4K	530-590-575	40°	220-240
● 1.1150.7218	6	2K7-3K2-4K	530-590-575	40°	220-240
libertad 9 Adj.					
● 1.1151.7118	9	2K7-3K2-4K	840-890-865	40°	220-240
● 1.1151.7218	9	2K7-3K2-4K	840-890-865	40°	220-240

ACCESSORIES


		▲
● 1.1150.8001	Reflector for libertad 6 adj.	60°
● 1.1151.8001	Reflector for libertad 9 adj.	60°



Related products



libertad fixed
page 035

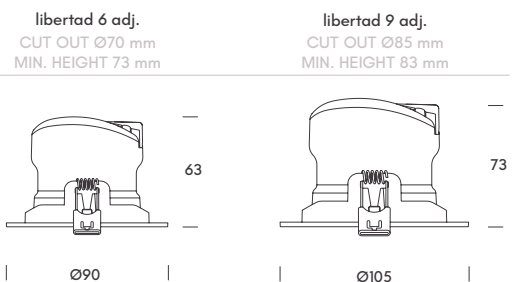

ceiling recessed
surface
suspension
wall
track lights
panels & industrial
table
ceiling
wall
floor



amsterdam.

adjustable
gen2

Amsterdam is an adjustable downlight with 25° orientation in all directions and a low profile, making it ideal for low-ceiling spaces. With CRI>90 and 3CCT Switch, it ensures high-quality, adaptable light, while DALI Push control enables precise project management.




	W	mA	K (3CCT)	Real lm (2K7-3K2-4K)	▲
● 1.1055.0118	7	180	2K7-3K2-4K	590-680-690	36°
● 1.1055.0218	7	180	2K7-3K2-4K	590-680-690	36°

DRIVERS ON-OFF

	W	mA	V
4.1031.1109	7	180	220-240
4.3069.1101	EU 3-22	125-500	200-240

DRIVERS DALI & PUSH

	W	mA	V
4.1069.6103	7-29	150-700	220-240
4.3069.6102	EU 5,5-22	125-500	220-240

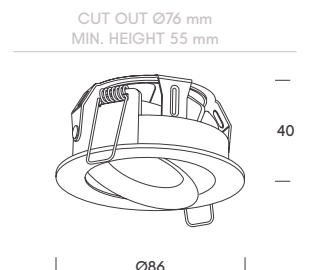


ceiling recessed
surface
suspension
wall
wall
track lights
panels & industrial
table
ceiling
wall
floor



osaka.

adjustable
& zoom

Osaka adapts to each project with its zoom system adjustable from 15° to 60° and 30° tilt. A luminaire designed to give freedom to the designer, allowing light to be focused and adjusted with total precision.



	W	mA	K	Real lm	▲
● 1.1068.0111	15	350	2700	605 (15°) 726 (60°)	15°-60°
● 1.1068.0112	15	350	3000	670 (15°) 804 (60°)	15°-60°

DRIVERS ON-OFF


	W	mA	V
4.3069.1101	EU 3-22	125-500	200-240

DRIVERS DALI & PUSH

	W	mA	V
4.3069.6101	EU 3-38	300-1050	220-240




CUT OUT Ø75 mm
MIN. HEIGHT 125 mm

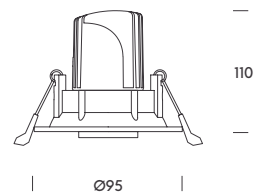



capri.

Capri is a piece where light and design take on a leading role. This surface-mounted mini spotlight stands out for its slender silhouette, elegant proportions, and strong decorative character. Fully adjustable, it allows you to shape accents, volumes, and heights with precision. Its refined finishes add a sophisticated presence beyond pure functionality.



	W	mA	K	Real lm	▲
● 1.1095.0111	5	150	2700	350	24°
● 1.1095.0211	5	150	2700	350	24°
● 1.1095.0911	5	150	2700	350	24°

DRIVERS ON-OFF

	W	mA	V
4.1031.1110	5W	150	200-240


DRIVERS DALI & PUSH

	W	mA	V
4.1069.6104	0,2-15	100-700	220-240
* 4.1069.6102	8-42	150-1050	220-240
* 4.3069.6102 EU	1,2-22	125-500	200-240

* Instalación driver en techo registrable.
Driver installation in accessible ceiling.
Installation du driver dans un plafond accessible.



CUT OUT Ø36 mm
MIN. HEIGHT 55 mm

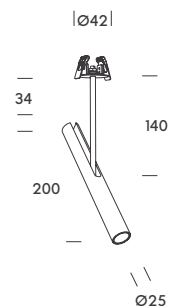

ceiling recessed
surface
suspension
wall
wall
track lights
panels & industrial
table
ceiling
wall
floor



andorra.

Andorra is a family of retractable, adjustable downlights, available in six sizes to cover everything from residential projects to large-scale retail. With a minimalist, versatile design, it works both as a downlight and as a spotlight.



ceiling recessed

surface

suspension

wall

track lights

panels & industrial

table

ceiling

wall

floor


COCKTAIL
MENU



andorra.

zoom

Andorra Zoom brings the essence of the Andorra family into a more compact format, maintaining its retractable and adjustable design. Created for projects that demand higher precision, it features a zoom optic adjustable from 10° to 30°, allowing you to tailor the beam to each need. It works both as a discreet downlight and an adjustable spotlight.



	W	mA	K	Real lm	▲
● 1.1085.0111	3	700	2700	60-100	10°-30°
● 1.1085.0211	3	700	2700	60-100	10°-30°

DRIVERS ON-OFF

	W	mA	V
4.1033.1102	3	700	220-240


DRIVERS DALI

	W	mA	V
* 4.3049.3102	EU	1-20	250-700 100-240

* Instalación driver en techo registrable.
Driver installation in accessible ceiling.
Installation du driver dans un plafond accessible.



CUT OUT Ø38 mm
MIN. HEIGHT 90 mm



ceiling recessed

surface

suspension

wall

track lights

panels & industrial

table

ceiling


wall

floor

andorra.

retractable

Andorra is a family of retractable, adjustable downlights, available in five sizes to cover everything from residential projects to large-scale retail. With a minimalist, versatile design, it works both as a downlight and as a spotlight.



	W	mA	K	Real lm	▲
andorra 5					
● 1.1073.0111	5	120	2700	365	24°
● 1.1073.0112	5	120	3000	380	24°
● 1.1073.0211	5	120	2700	365	24°
● 1.1073.0212	5	120	3000	380	24°
andorra 7					
● 1.1074.0111	7	180	2700	525	24°
● 1.1074.0112	7	180	3000	550	24°
● 1.1074.0211	7	180	2700	525	24°
● 1.1074.0212	7	180	3000	550	24°
andorra 12 gen2					
● 1.1070.0112	12	300	3000	1170	24°
● 1.1070.0114	12	300	4000	1205	24°
● 1.1070.0212	12	300	3000	1170	24°
● 1.1070.0214	12	300	4000	1205	24°

	W	mA	K	Real lm	▲
andorra 20 gen2					
● 1.1071.0112	20	500	3000	2230	24°
● 1.1071.0114	20	500	4000	2300	24°
● 1.1071.0212	20	500	3000	2230	24°
● 1.1071.0214	20	500	4000	2300	24°
andorra 30 gen2					
● 1.1072.0112	30	700	3000	3350	24°
● 1.1072.0114	30	700	4000	3450	24°
● 1.1072.0212	30	700	3000	3350	24°
● 1.1072.0214	30	700	4000	3450	24°


DRIVERS ON-OFF


	W	mA	V
for andorra 5			
4.1031.1108	5	120	220-240
for andorra 7			
4.1031.1109	7	180	220-240
for andorra 12			
4.3061.1102	EU	3-13	300
for andorra 12 . 20			
4.1069.1101	6,3-21	150-500	200-240
for andorra 7 . 12 . 20			
* 4.3069.1101	EU	3-22	125-500
for andorra 30			
* 4.3069.1102	EU	15-32	350-725

DRIVERS DALI & PUSH

	W	mA	V
for andorra 7			
* 4.1069.6103	7-29	150-700	200-240
* 4.3069.6102	EU	5,5-22	125-500
for andorra 7 . 12			
* 4.1069.6102	8-42	150-1050	200-240
for andorra 12 . 20 . 30			
4.3069.6101	EU	3-38	300-1050
for andorra 20 . 30			
4.1069.6103	7-29	150-700	220-240

* Instalación driver en techo registrable.
Driver installation in accessible ceiling.
Installation du driver dans un plafond accessible.

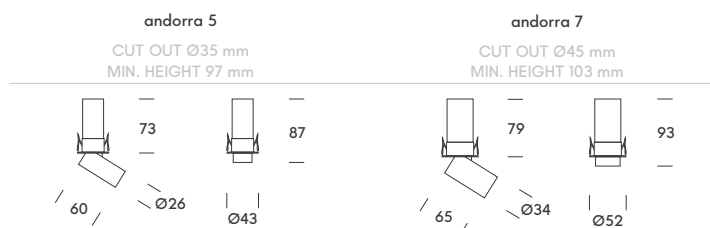

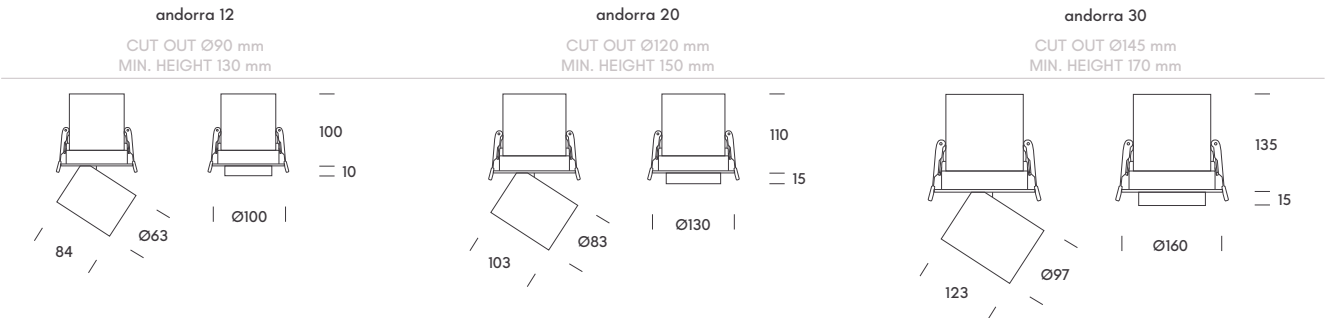




palermo

retractable

Palermo is a retractable, adjustable downlight (90°/355°) that works both as a spotlight and recessed fixture. Adjustable and DALI compatible, it combines versatility and precision to highlight details with minimal effort and maximum impact.



	W	mA	K	Real lm	▲
palermo 3					
● 1.1082.0112	3	700	3000	210	24°
● 1.1082.0212	3	700	3000	210	24°
palermo 6					
● 1.1083.0112	6	700	3000	420	24°
● 1.1083.0212	6	700	3000	420	24°


DRIVERS ON-OFF

	W	mA	V
for palermo 3			
4.1033.1102	3	700	220-240

	W	mA	V
for palermo 6			
4.1033.1103	6	700	220-240

DRIVERS DALI

	W	mA	V
for palermo 3 . 6			
4.3049.3102 EU	20	250-700	100-240

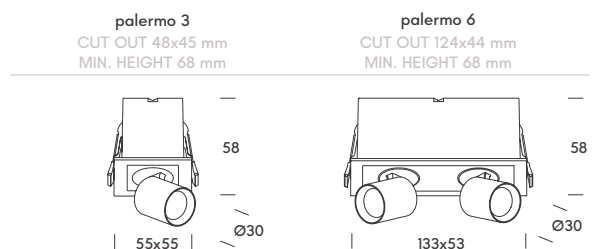

ceiling recessed
surface
suspension
wall
track lights
panels & industrial
table
ceiling
wall
floor



taiwan

tiltable

Taiwan allows you to direct light with precision through a 25° beam and 355° rotation. With 3CCT Switch (2700K-3200K-4000K), CRI>90 and a recessed light source (UGR<19), it provides high visual comfort and versatile accent lighting. Its adjustable design is ideal for highlighting architectural or decorative elements in retail, hospitality or residential projects.



	W (multi)	mA	Real lm (2K7-3K2-4K)	▲
taiwan round				
● 1.1077.0118	7 10	180 250	490-540-550 670-740-755	24°
● 1.1077.0218	7 10	180 250	490-540-550 670-740-755	24°
taiwan square				
● 1.1078.0118	7 10	180 250	490-540-550 670-740-755	24°
● 1.1078.0218	7 10	180 250	490-540-550 670-740-755	24°

DRIVERS ON-OFF



	W	mA	V
4.1031.1109	7,2	180	220-240
4.1031.1106	10	250	220-240
4.3069.1101	EU 3-22	125-500	200-240

DRIVERS DALI & PUSH

	W	mA	V
4.1069.6103	7-29	150-700	220-240
4.3069.6102	EU 5,5-22	125-500	220-240

ACCESSORIES

		▲
● 1.1077.8002	Lens	50° 1
● 1.1077.8001	Honeycomb	- 2

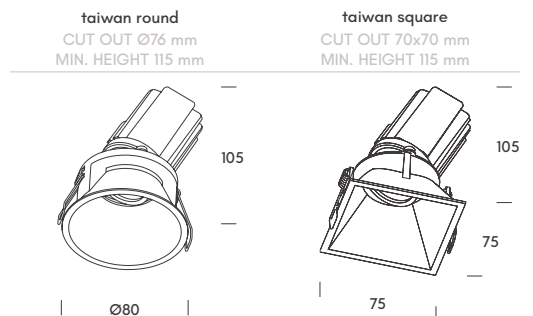


ceiling recessed
surface
suspension
wall
wall
track lights
panels & industrial
table
ceiling
wall
floor



colombia.

adjustable

Colombia is a cardan family available in one or two modules, with $\pm 30^\circ$ adjustment range. With CRI>90 and CCT Switch, its flexible design delivers precise orientation and high-quality light for projects seeking versatility and definition.



	W	mA	K (3CCT)	Real lm (2K7-3K-4K)	▲
colombia 10					
● 1.1135.0118	10	250	2K7-3K-4K	670-685-800	36°
● 1.1135.0218	10	250	2K7-3K-4K	670-685-800	36°
colombia 20					
● 1.1136.0118	2x10	450	2K7-3K-4K	1340-1370-1600	36°
● 1.1136.0218	2x10	450	2K7-3K-4K	1340-1370-1600	36°

DRIVERS ON-OFF

	W	mA	V
for colombia 10 . 20			
4.3069.1101	EU	3-22	125-500
			200-240

for colombia 10 . 20

4.1069.1101	6,3-21	150-500	240
-------------	--------	---------	-----

DRIVERS DALI & PUSH

	W	mA	V
for colombia 10			
4.1069.6102	8-42	150-1050	200-240


for colombia 10 . 20


4.3069.6102	EU	5,5-22	125-500
			220-240



colombia 10
CUT OUT 97x97 mm
MIN. HEIGHT 100 mm

colombia 20
CUT OUT 183x97 mm
MIN. HEIGHT 100 mm

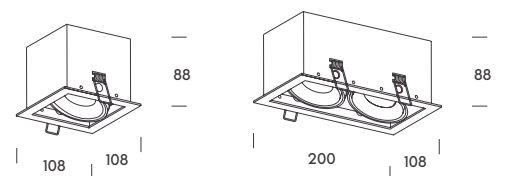



ROOMS
102-120

zermatt.

Zermatt is a family of trimless mini downlights conceived to disappear into the ceiling. Available in two sizes, Zermatt 7 (Ø45 mm) and the ultra-compact Zermatt 5 (Ø34 mm), it adapts to different project needs. Zermatt 7 allows recessed or semi-recessed installation, while Zermatt 5 is fully recessed. Both versions offer decorative inner rings in multiple finishes, adding subtle character to a discreet and precise design.



floor

wall

ceiling

table

panels & industrial

track lights

wall

suspension

surface

ceiling recessed

zermatt.

trimless

Zermatt is a family of trimless mini downlights conceived to disappear into the ceiling. Available in two sizes, Zermatt 7 (Ø45 mm) and the ultra-compact Zermatt 5 (Ø34 mm), it adapts to different project needs. Zermatt 7 allows recessed or semi-recessed installation, while Zermatt 5 is fully recessed. Both versions offer decorative inner rings in multiple finishes, adding subtle character to a discreet and precise design.



	W	mA	K	Real lm	▲
zermatt 5					
● 1.1142.0111 (white reflector)	5	250	2700	425	36°
● 1.1142.0211 (black reflector)	5	250	2700	405	36°
zermatt 7					
● 1.1141.0111 (white reflector)	7	350	2700	630	36°
● 1.1141.0211 (black reflector)	7	350	2700	590	36°
● 1.1141.0112 (white reflector)	7	350	3000	640	36°
● 1.1141.0212 (black reflector)	7	350	3000	600	36°

DRIVERS ON-OFF

	W	mA	V
for zermatt 5			
4.1031.1104	2,5-6	250	220-240
* 4.3069.1101	EU 5,5-22	125-500	200-240
for zermatt 7			
4.3041.1102	EU 6-8	350	100-240

DRIVERS DALI & PUSH

	W	mA	V
for zermatt 5 . 7			
4.1069.6104	0,2-15	100-700	200-240
* 4.3069.6102	EU 1,2-22	125-500	200-240
for zermatt 7			
* 4.1069.6102	8-42	150-1050	200-240

* Instalación driver en techo registrable.
Driver installation in accessible ceiling.
Installation du driver dans un plafond accessible.

ACCESSORIES

for zermatt 5

● 1.1142.8001	Ring Gold	1
● 1.1142.8002	Ring Brass	2
● 1.1142.8003	Ring Rose gold	3
● 1.1142.8004	Ring Black	4


ACCESSORIES

for zermatt 7


● 1.1141.8001	Ring Gold	1
● 1.1141.8002	Ring Brass	2
● 1.1141.8003	Ring Rose gold	3
● 1.1141.8004	Ring Black	4

ACCESSORIES


● 1.1142.8005	Lens for zermatt 5	15°	5
● 1.1142.8006	Lens for zermatt 5	24°	5
● 1.1141.8005	Lens for zermatt 7	15°	5
● 1.1141.8006	Lens for zermatt 7	24°	5




zermatt 5 recessed

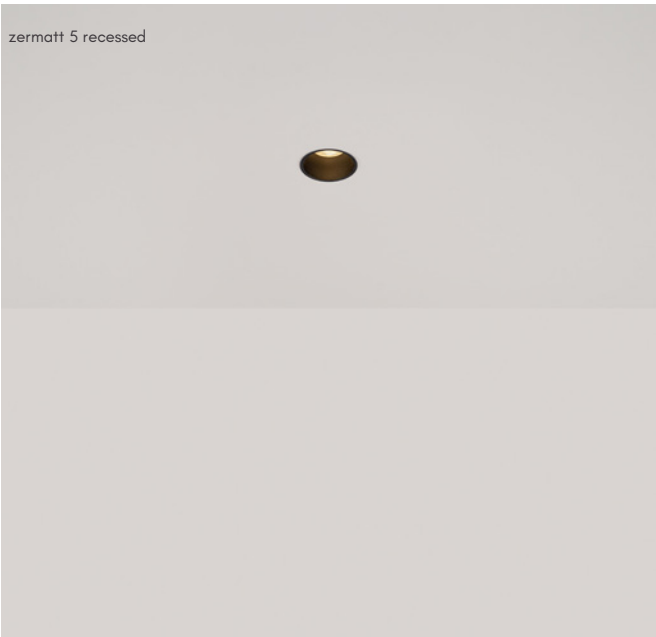

zermatt 7 recessed & semi-recessed


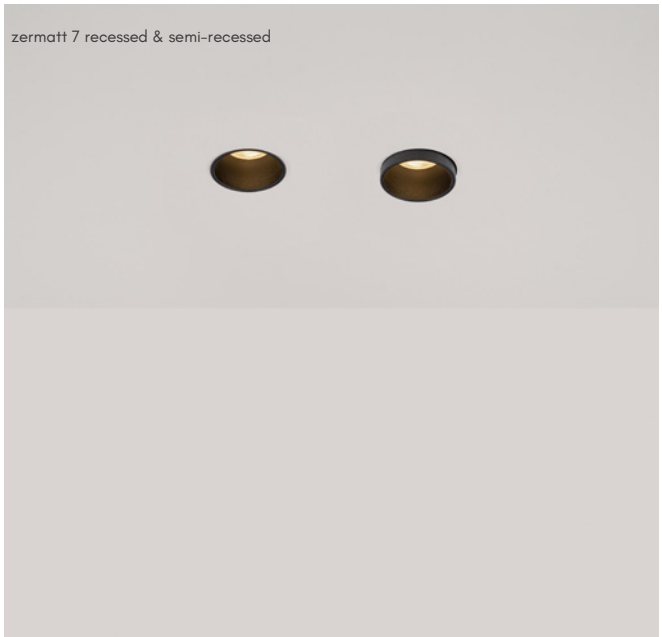


zermatt 5

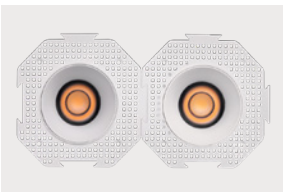

zermatt 5
CUT OUT Ø45 mm
MIN. HEIGHT 80 mm


zermatt 7
CUT OUT Ø60 mm
MIN. HEIGHT 95 mm





mini malta. led module

Compact version of the Malta system, designed to maintain its modular essence in a smaller format. With a 35° beam angle and aluminium body, it delivers precise and comfortable lighting. The quick-connect system simplifies installation while preserving the same versatility and refined aesthetics that define the family.



	W	mA	K (3CCT)	Real lm (2K7-3K2-4K)	▲
1.1121.0118	7	180	2K7-3K2-4K	510-580-575	35°

DRIVERS ON-OFF

	W	mA	V
4.1031.1109	7	180	220-240
* 4.3069.1101	EU	3-22	125-500


DRIVERS DALI & PUSH

	W	mA	V
* 4.1069.6103	7-29	150-700	200-240
* 4.3069.6102	EU	5,5-22	125-500


* Instalación driver en techo registrable.
Driver installation in accessible ceiling.
Installation du driver dans un plafond accessible.

ACCESSORIES

		Ø	▲
1.1121.8102	Frame fix IP20*	50	- 1
1.1121.8103	Frame fix IP20*	50	- 2
1.1121.8104	Frame round deep fix IP54*	55	- 3
1.1121.8105	Frame round deep fix IP54*	55	- 4
1.1121.8106	Frame round tiltable fix IP20*	65	- 5
1.1121.8107	Frame round tiltable fix IP20*	65	- 6
1.1121.8002	Lens	-	25° 7
1.1121.8003	Lens	-	45° 7
1.1121.8004	Lens	-	60° 7
1.1121.8101	Black ring	35	- 8
1.1121.8001	Honeycomb	-	- 9

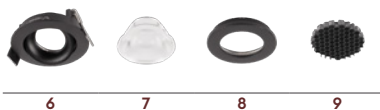

led module




frame fix

CUT OUT Ø45 mm
MIN. HEIGHT 90 mm



frame deep IP54

CUT OUT Ø45 mm
MIN. HEIGHT 90 mm



frame tiltable ± 30°

CUT OUT Ø55 mm
MIN. HEIGHT 80 mm



* Marcos compatibles con bombilla MR11 GU10 Ø35mm. (Ref. 1.2020.8000)
Compatible frames for MR11 GU10 Ø35mm bulbs. (Ref. 1.2020.8000)
Cadres compatibles avec ampoule MR11 GU10 Ø35 mm. (Réf. 1.2020.8000)



round adjustable gen2




comfort adjustable gen2



round single adjustable




square double adjustable



square



round

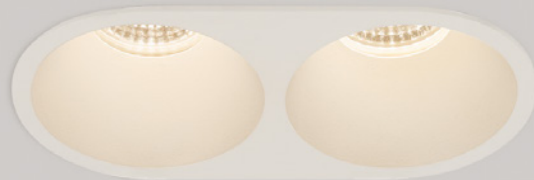

round double



semi recessed round



semi recessed square




trimless round

malta.

led module · gen3

Malta is a modular downlight family combining a single LED module with multiple compatible frames. Its aluminum COB module features a CCT Switch (2700K-3200K-4000K), CRI>90, and a quick connector for easy installation. The frames, available in white or black, come in fixed or adjustable versions, with or without trim, and in various shapes. A versatile solution that adapts to the character of each project.



	W	mA	K (3CCT)	Real lm (2K7-3K2-4K)	▲
malta 8 . 12					
1.1122.0218	8	200	2K7-3K2-4K	780-805-795	38°
	12	300		1040-1080-1060	
malta 15					
1.1123.0218	15	350	2K7-3K2-4K	1330-1370-1355	38°

Esta luminaria necesita un marco. Ver página 90.
This fixture requires a frame. See page 90.
Ce luminaire nécessite une cadre. Voir page 90.

DRIVERS ON-OFF

	W	mA	V
for malta 8 . 12			
4.3069.1101	EU	3-22	125-500 200-240

for malta 8 . 12 . 15


4.1069.1101	21	150-500	200-240
-------------	----	---------	---------

DRIVERS DALI & PUSH

	W	mA	V
for malta 8 . 12 . 15			
4.1069.6102	8-42	150-1050	220-240
4.3069.6102	EU	5,5-22	125-500 220-240

ACCESSORIES

1.1122.8005	Lens malta 8 . 12 . 15	15°	1
1.1122.8006	Lens malta 8 . 12 . 15	24°	1
1.1122.8007	Lens malta 8 . 12 . 15	60°	1
1.1122.8101	Black ring malta 8 . 12 . 15	-	2
1.1122.8008	Honeycomb malta 8 . 12 . 15	-	3

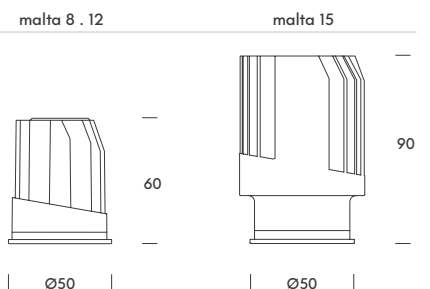

ceiling recessed
surface
suspension
wall
wall
track lights
panels & industrial
table
ceiling
wall
floor


malta.

frames


	Malta 8 12	Malta 15
round adjustable		
malta round adjustable gen2		
● 1.1120.8114	Ø70x100	Ø70x130
● 1.1120.8115	Ø70x100	Ø70x130
malta comfort adjustable gen2		
● 1.1120.8116	Ø70x105	Ø70x135
malta round single adjustable		
● 1.1120.8117	Ø85x100	Ø85x130
● 1.1120.8217	Ø85x100	Ø85x130
square adjustable		
malta square single adjustable		
● 1.1120.8118	80x80x100	80x80x130
● 1.1120.8218	80x80x100	80x80x130
malta square double adjustable		
● 1.1120.8119	160x80x104	160x80x134
● 1.1120.8219	160x80x104	160x80x134
fixed		
malta square		
● 1.1120.8104	76x76x110	76x76x140
● 1.1120.8105	76x76x110	76x76x140
malta round IP20		
● 1.1120.8108	Ø75x110	Ø75x140
● 1.1120.8208	Ø75x110	Ø75x140
malta round IP65		
● 1.1120.8109	Ø75x110	Ø75x140
● 1.1120.8209	Ø75x110	Ø75x140
malta round double IP20		
● 1.1120.8120	Ø75x154x110	Ø75x154x140
● 1.1120.8220	Ø75x154x110	Ø75x154x140

	Malta 8 12	Malta 15
semi recessed		
malta semi recessed round		
● 1.1120.8112	Ø64x90	Ø64x120
● 1.1120.8212	Ø64x90	Ø64x120
malta semi recessed square		
● 1.1120.8113	Ø64x86	Ø64x116
● 1.1120.8213	Ø64x86	Ø64x116
cardan		
malta cardan single		
● 1.1120.8110	85x85x100	85x85x130
malta cardan double		
● 1.1120.8111	160x85x100	160x85x130
trimless		
malta trimless round		
● 1.1120.8106	Ø85x105	Ø85x135
● 1.1120.8206	Ø85x105	Ø85x135
malta trimless square		
● 1.1120.8107	75x78x110	75x78x140
● 1.1120.8207	75x78x110	75x78x140


Your own configuration

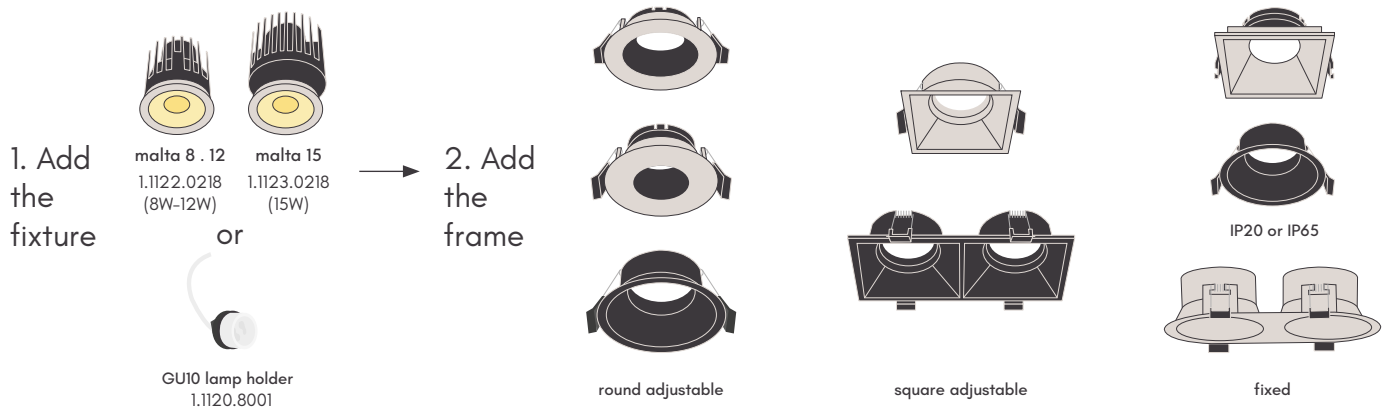


round adjustable

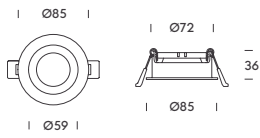

malta round adjustable gen2

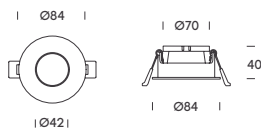


malta comfort adjustable gen2

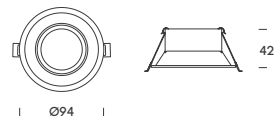


malta round single adjustable

square adjustable




malta square single adjustable




malta square double adjustable


fixed



malta square




malta round IP20 or IP65




malta round double IP20

semi recessed




malta semi recessed round




malta semi recessed square

cardan




malta cardan single




malta cardan double


trimless



malta trimless round



malta trimless square

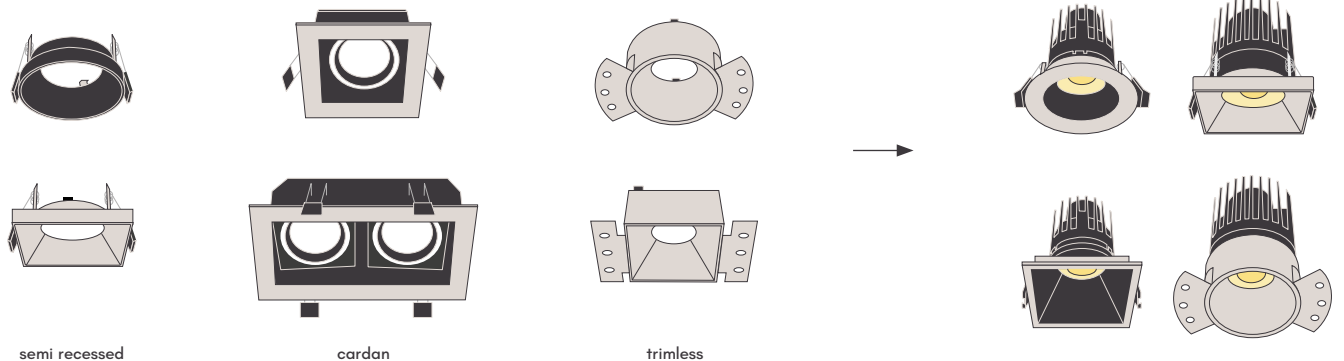

semi recessed

cardan

trimless

A close-up photograph of a circular, perforated metal surface, likely a speaker grille or a light fixture. The surface is composed of a fine, grid-like pattern of small holes. The word "surface" is printed in a clean, sans-serif font in the center of the circular area. The lighting is soft and even, highlighting the texture of the metal. The background is a plain, light-colored surface.

surface

ceiling mounted	ibiza.	95
	brussels.	97
	nepal.	99
	bogota.	103

surface
suspension
wall
track lights
panels & industrial
table
ceiling
wall
floor



ibiza.

Ibiza is a family of ceiling and wall luminaires with a clean, functional design that adapts to different spaces. It features independent switches to adjust power and color temperature, offering flexibility for every project. With IP65 protection, it is ideal for common areas, corridors, or humid spaces such as changing rooms. In addition, it is available in a motion sensor version to add efficiency and convenience.



IP 65 · IK 08 · CRI >80 · DRIVER INCL · ON OFF · PF >0,9 · 35.000H LIFE · PP BODY · PP DIFFUSER · **CB** · RETILAP

	W (multi)	K (3CCT)	Real lm (2K7-3K2-4K)	▲	V
ibiza 15					
1.2030.1118	10 15	2K7-3K2-4K	1045-1170-1135 1390-1605-1525	110°	220-240
ibiza 15 sensor *					
1.2035.1118	10 15	2K7-3K2-4K	1045-1170-1135 1390-1605-1525	110°	220-240
ibiza 18					
1.2031.1118	13 18	2K7-3K2-4K	1220-1335-1320 1670-1855-1790	110°	220-240
ibiza 32					
1.2032.1118	22 32	2K7-3K2-4K	2125-2355-2290 2925-3270-3105	110°	220-240

* Sensor de movimiento: se apaga tras 5s, 1 min, 3 min o 10 min
 Sensor de luz: se enciende por debajo de 25lx
 Motion sensor: Turns off after 5s, 1 min, 3 min or 10 min
 Light sensor: Turns on below 25lx
 Capteur de mouvement : s'éteint après 5s, 1 min, 3 min ou 10 min
 Capteur de luminosité : s'allume en dessous de 25lx

ACCESSORIES

1.2030.8101	Suspension kit 1,5m. with slim canopy	-	-	1
1.2030.8102	Tilttable wall/ceiling bracket	355°	90°	2
1.2030.8103	Tilttable 3 phases track adapter	355°	90°	3

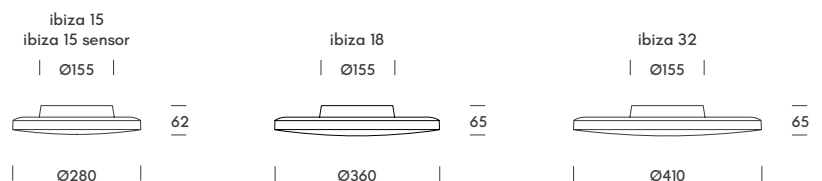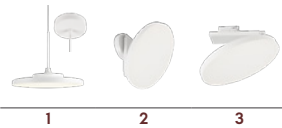





brussels.

Brussels is a family of solid ceiling lights that easily adapts to different projects. Available in two sizes and power options, they feature a CCT Switch to select between 3000K, 3500K, or 4000K, offering lighting flexibility for every application. Its aluminum body ensures strength and durability, with the option for suspended installation to expand design possibilities.



	W (multi)	K (3CCT)	Real lm (3K-3K2-4K)	▲	V
brussels 26					
●	1.2025.6118	26	3K-3K2-4K	2630-2720-2760	90° 220-240
●	1.2025.6218	26	3K-3K2-4K	2630-2720-2760	90° 220-240
brussels 40					
●	1.2026.6118	40	3K-3K2-4K	4120-4230-4340	90° 220-240
●	1.2026.6218	40	3K-3K2-4K	4120-4230-4340	90° 220-240

ACCESSORIES		Width · Height (mm)	Length cables (mm)	
●	1.2025.8101	Suspension kit (Brussels 20 · 40)	Ø136x33	200 1
●	1.2025.8201	Suspension kit (Brussels 20 · 40)	Ø136x33	200 1

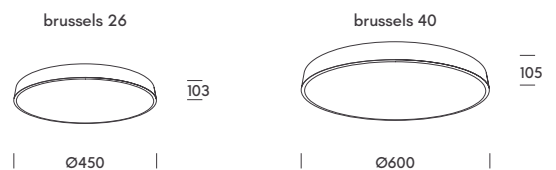

surface
suspension
wall
track lights
panels & industrial
table
ceiling
wall
floor



nepal.

With Nepal you get a family of surface-mounted luminaires defined by pure geometric shapes: cylinders and cubes in different sizes and powers. Made of aluminum and with CRI>90, they provide faithful light quality and a clean design that naturally blends into your most versatile and contemporary projects.



surface

suspension

wall

track lights

panels & industrial

table

ceiling

wall

floor

nepal.

With Nepal you get a family of surface-mounted luminaires defined by pure geometric shapes: cylinders and cubes in different sizes and powers. Made of aluminum and with CRI>90, they provide faithful light quality and a clean design that naturally blends into your most versatile and contemporary projects.



	W	K	Real lm	▲	V
nepal 7 round					
● 1.2000.1112 (Black inner ring)	7	3000	450	24°	220-240
● 1.2000.1212 (Brass inner ring)	7	3000	450	24°	220-240
nepal 7 square					
● 1.2001.1112 (Black inner ring)	7	3000	450	24°	220-240
● 1.2001.1212 (Brass inner ring)	7	3000	450	24°	220-240

ACCESSORIES

● 1.2000.8101	White ring	1
● 1.2000.8201	Black ring	2
● 1.2000.8901	Gold ring	3




	W	K	Real lm	▲	V
nepal 12 round					
● 1.2002.1112 (Matt Black inner ring)	12	3000	780	45°	100-240
● 1.2002.1212 (Matt Black inner ring)	12	3000	780	45°	100-240
nepal 20 round					
● 1.2004.1112 (Matt Black inner ring)	20	3000	1300	45°	100-240
● 1.2004.1212 (Matt Black inner ring)	20	3000	1300	45°	100-240
nepal 30 round					
● 1.2006.1112 (Matt Black inner ring)	30	3000	1950	45°	100-240
● 1.2006.1212 (Matt Black inner ring)	30	3000	1950	45°	100-240




surface
suspension
wall
track lights
panels & industrial
table
ceiling
wall
floor


nepal 7 round




nepal square 7




nepal 12 round



nepal 20 round

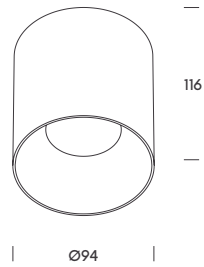

nepal 30 round

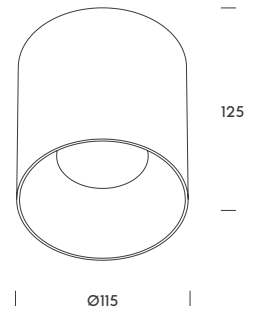



bogota.

A family built on functionality and visual coherence. Its sober, minimalist design is available as pendant, surface-mounted or spotlight for track or base. Compatible with GU10 bulbs, it's a versatile option for everyday projects seeking flexibility without losing a clear, cohesive aesthetic.



surface

suspension

wall

track lights

panels & industrial

table

ceiling

wall

floor

bogota.

GU10

A family built on functionality and visual coherence. Its sober, minimalist design is available as pendant, surface-mounted or spotlight for track or base. Compatible with GU10 bulbs, it's a versatile option for everyday projects seeking flexibility without losing a clear, cohesive aesthetic.



	W	Holder	V
bogota square single			
● 1.2023.1190 (Black inner ring)	Max. 10	GU10 LED	100-240
● 1.2023.1290 (Gold inner ring)	Max. 10	GU10 LED	100-240
bogota square double			
● 1.2024.1190 (Black inner ring)	Max. 2x10	GU10 LED	100-240
● 1.2024.1290 (Gold inner ring)	Max. 2x10	GU10 LED	100-240
bogota round single			
● 1.2020.1190 (Black inner ring)	Max. 10	GU10 LED	100-240
● 1.2020.1290 (Gold inner ring)	Max. 10	GU10 LED	100-240
bogota spotlight base			
● 1.2021.1190 (Black inner ring)	Max. 10	GU10 LED	100-240
● 1.2021.1290 (Gold inner ring)	Max. 10	GU10 LED	100-240

Lámpara GU10 no incluida.
GU10 bulb not included.
Lampe GU10 non incluse.

ACCESSORIES

for bogota round & bogota spotlight

- 1.2020.8101 Honeycomb + pliers 1



Related products



bogota pendant
page 113



bogota s
page 131



bogota spotlight track
page 157



surface

suspension

wall

track lights

panels & industrial


table

ceiling


wall

floor


bogota square single




bogota square double



bogota round single



bogota spotlight base

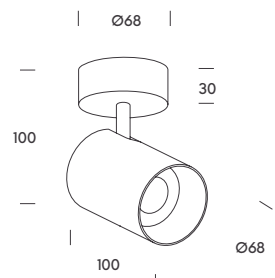

suspension



pendant	brussels.	97
	bologna.	109
	pisa.	111
	bogota.	113

suspension

wall

track lights

panels & industrial

table

ceiling

wall




floor




bologna.

Bologna blends sculptural presence and visual lightness in a pendant luminaire with a clear identity. Its thin suspension cable enhances the floating effect, while the 24° optic delivers warm, focused light. Available in black, white or gold, it works both as a standalone piece or in group compositions for residential, commercial, or contract projects.

 IP 20
  CRI >90
  UGR <19
  3 STEP MACADAM
  DRIVER INCL
  PF >0,5
  ON OFF TRIAC
white black finishes gold finish

	W	K	Real lm	▲	V
 1.2105.1112 (Black inner ring)	7,5	3000	420	24°	220-240
 1.2105.1212 (Black inner ring)	7,5	3000	420	24°	220-240
 1.2105.7912 (Black inner ring)	7,5	3000	420	24°	220-240

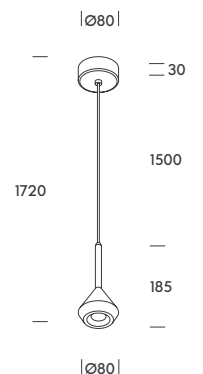

suspension

wall

track lights

panels & industrial

table

ceiling

wall




floor




pisa.

Pisa embraces an essential aesthetic: a cylindrical aluminum body that concentrates a warm and defined 38° beam. Its refined form responds with restraint to the technical and formal requirements of the project, integrating effortlessly into any composition. Available in white, black or gold, Pisa combines discretion, precision, and lighting quality in a single gesture.

 IP 20 ·
  CRI >90 ·
  UGR <19 ·
  DRIVER INCL ·
  PF >0,5 ·
  ON OFF
white
black
finishes ·
  TRIAC
gold
finish ·
 40.000H LIFE ·
 FLICKER FREE ·
 AL BODY ·
 AL REFLECTOR ·
 150 CM ·
 CB · RETILAP

	W	K	Real lm	▲	V
 1.2100.1112 (Black inner ring)	7,5	3000	255	38°	220-240
 1.2100.1212 (Black inner ring)	7,5	3000	255	38°	220-240
 1.2100.7912 (Black inner ring)	7,5	3000	255	38°	220-240

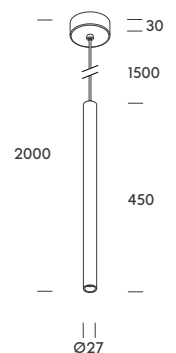

suspension
wall
track lights
panels & industrial
table
ceiling
wall
floor



bogota.

GU10

A family built on functionality and visual coherence. Its sober, minimalist cylindrical design is available as pendant, surface-mounted or spotlight for track or base. Compatible with GU10 bulbs, it's a versatile option for everyday projects seeking flexibility without losing a clear, cohesive aesthetic.

 IP 20 ·
  CRI >90 ·
  AL BODY ·
  PMMA LENS ·
  150 CM ·
  CB ·
  RETILAP


	W	Holder	V
● 1.2022.1190 (Black inner ring)	Max. 10	GU10 LED	100-240
● 1.2022.1290 (Gold inner ring)	Max. 10	GU10 LED	100-240

Lámpara GU10 no incluida.
GU10 bulb not included.
Lampe GU10 non incluse.

ACCESSORIES		Cut out (mm)	
● 1.2020.8101	Honeycomb + pliers	-	1
● 1.2020.8100	White recessed canopy	70	
● 1.2020.8200	Black recessed canopy	70	2



Related products



bogota square & round
page 104




bogota spotlight base
page 104



bogota s
page 131



bogota spotlight track
page 157

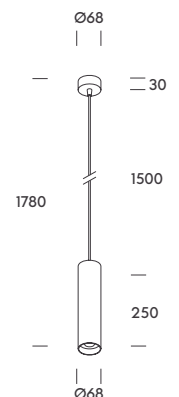

suspension

wall

track lights

panels & industrial


table

ceiling

wall

floor

wall

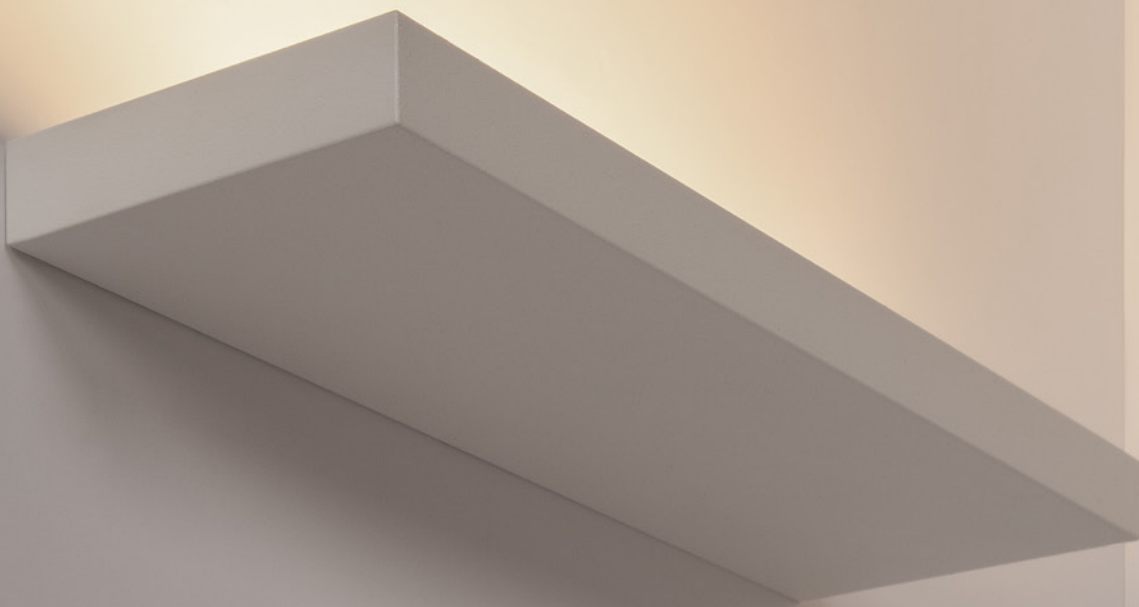

step lights	madeira.	117
	lisbon.	121
	algarve.	122
	sintra.	123
reading lights	iceland.	125
	england.	127
	usa.	129
	bogota s.	131
	trinidad.	133
wall lights	crete.	135
	greece.	137
	copenhagen.	139
	cali.	141

woodill

track lights

panels & industrial

table

ceiling

wall

floor



madeira.

A courtesy lighting system with a compact pocket-sized design and aluminium body. Its asymmetric light softly directs the beam towards the floor, ideal for steps or passageways. Compatible with five different frames, allowing its aesthetic presence to adapt to the character of each project.



wall

track lights

panels & industrial

table

ceiling

wall

floor



madeira.

step lighting


A courtesy lighting system with a compact pocket-sized design and aluminium body. Its asymmetric light softly directs the beam towards the floor, ideal for steps or passageways. Compatible with five different frames, allowing its aesthetic presence to adapt to the character of each project.



	W	mA	K	Real lm
● 1.4005.0511	1 2	350 700	2700	50 100
● 1.4005.0512	1 2	350 700	3000	50 100

ACCESSORIES


● 1.4005.8001	Frame R1	1
● 1.4005.8002	Frame R2	2
● 1.4005.8003	Frame R3	3
● 1.4005.8004	Frame R4	4
● 1.4005.8005	Frame S1	5
● 1.4005.8101	Recessed box	6



DRIVERS ON-OFF

	W	mA	V
4.1011.1303	3,5	350	100-240
* 4.3041.1201	EU 1-8	350	100-240
4.1013.1304	3	700	100-240
* 4.3043.1201	EU 6	700	100-240

* Instalación driver en techo registrable.
Driver installation in accessible ceiling.
Installation du driver dans un plafond accessible.

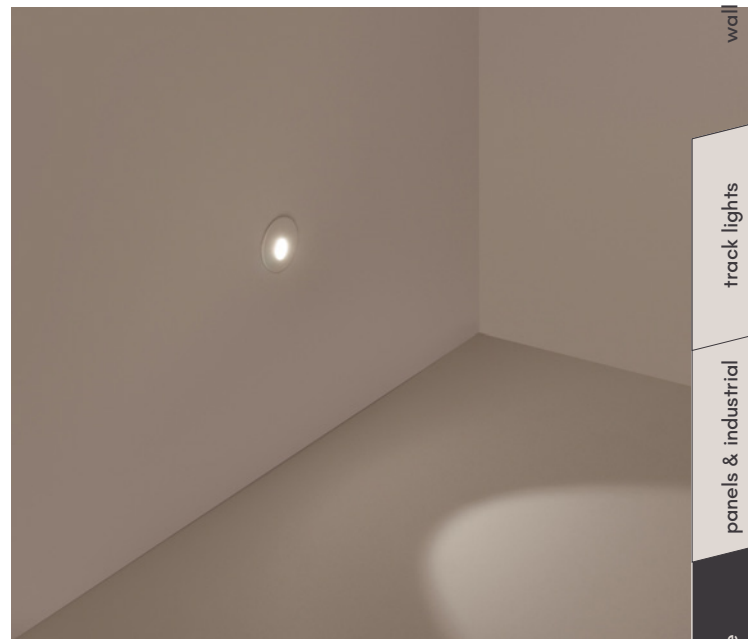

Your own configuration




1. Add recessed box (opcional)

2. Add the fixture (obligatory)

3. Add the frame (obligatory)

CUT OUT Ø32 mm
CUT OUT with recessed box Ø36 mm



| 26 |



lisbon.

step lighting

Designed to blend in effortlessly, Lisbon emits a grazing line of light that follows the path with precision. Its discreet circular format integrates into steps and walls without standing out, bringing rhythm and visual continuity to any space. Available in white and aluminium finishes.



	W	mA	K	Real lm
● 1.4001.0111	1	350	2700	50
	2	700		110

ACCESSORIES

● 1.4005.8101	Recessed box	1
---------------	--------------	---




1

DRIVERS ON-OFF

	W	mA	V
4.1011.1303	3,5	350	100-240
* 4.3041.1201	EU 1-8	350	100-240
4.1013.1304	3	700	100-240
* 4.3043.1201	EU 6	700	100-240

* Instalación driver en techo registrable.
Driver installation in accessible ceiling.
Installation du driver dans un plafond accessible.

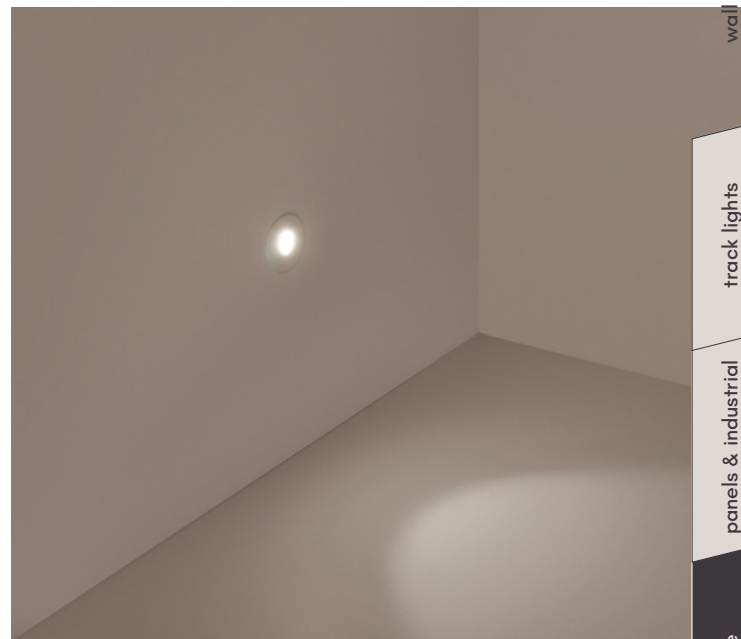

wall

track lights

panels & industrial


table

ceiling

wall

floor

CUT OUT Ø34 mm
CUT OUT with recessed box Ø36 mm



algarve.

step lighting

With a halo-shaped aperture, Algarve creates a unique circular glow that softens and elevates every step. Its distinctive design turns functional lighting into a visual gesture perfect for adding nuance to stairs or transitional zones.


 IP 65 ·
  IK 08 ·
  CRI >90 ·
  DRIVER NO INCL ·
 50.000H LIFE ·
 AL BODY ·
 100 CM ·
 CB ·
 RETILAP

	W	mA	K	Real lm
● 1.4004.0111	1	350	2700	70
	2	700		140


DRIVERS ON-OFF

	W	mA	V
4.1011.1303	3,5	350	100-240
* 4.3041.1201	EU 1-8	350	100-240
4.1013.1304	3	700	100-240
* 4.3043.1201	EU 6	700	100-240

* Instalación driver en techo registrable.
 Driver installation in accessible ceiling.
 Installation du driver dans un plafond accessible.

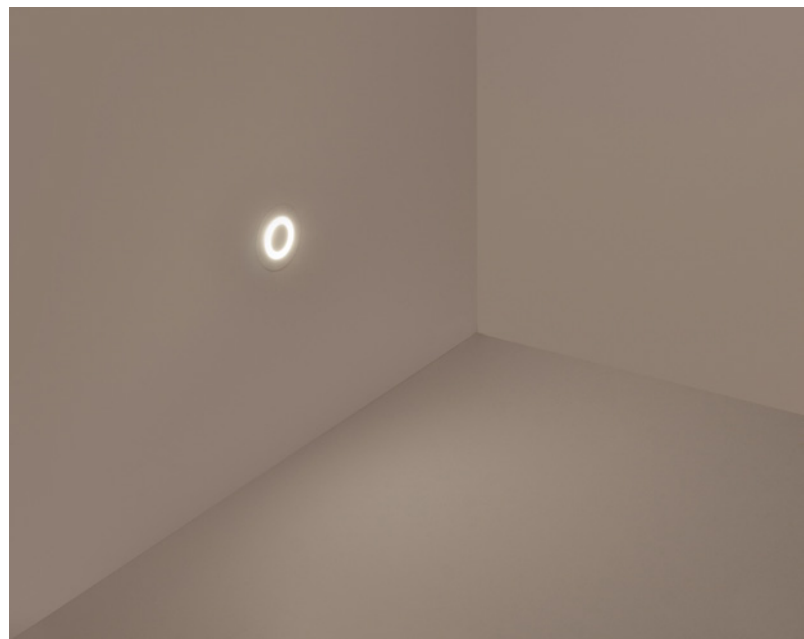

CUT OUT Ø36 mm



sintra.

step lighting

Sintra turns light into a subtle, enveloping experience. Its circular surface design casts a soft double halo of indirect light, symmetrically spreading across the wall to create a balanced and sculptural effect. A discreet yet expressive presence that brings rhythm, warmth and harmony to every step.



	W	mA	K	Real lm
● 1.4003.0111	1	350	2700	50
	2	700		110

ACCESSORIES

● 1.4005.8101	Recessed box	1
---------------	--------------	---



1


DRIVERS ON-OFF

	W	mA	V
4.1011.1303	3,5	350	100-240
* 4.3041.1201	EU 1-8	350	100-240
4.1013.1304	3	700	100-240
* 4.3043.1201	EU 6	700	100-240

* Instalación driver en techo registrable.
Driver installation in accessible ceiling.
Installation du driver dans un plafond accessible.



CUT OUT Ø34 mm
CUT OUT with recessed box Ø36 mm



40





iceland.

reading

Designed for seamless integration, Iceland features an aluminium body and a slim 30 mm profile. Its warm and precise light (HP LED 3000K, CRI>90) is ideal for focused reading. With a built-in switch and a choice of white, black or gold finish, it's a discreet and efficient piece for hotel rooms or domestic settings.



	W	K	Real lm	▲	V
● 1.3001.1112	3	3000	160	40°	100-240
● 1.3001.1212	3	3000	160	40°	100-240
● 1.3001.1912	3	3000	160	40°	100-240

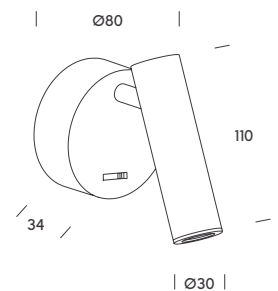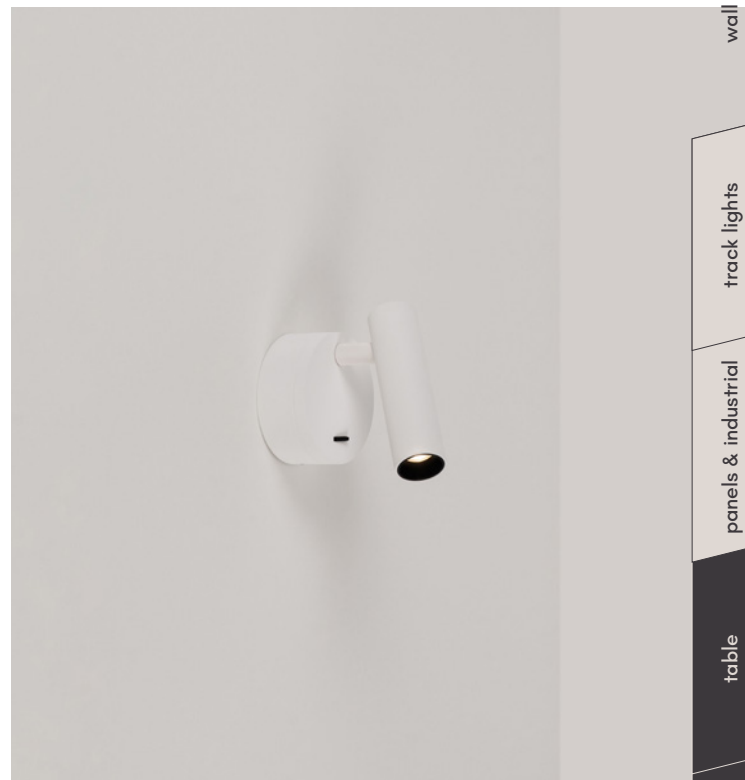

wall

track lights

panels & industrial

table

ceiling

wall

floor



EAT DRINK NAP
VANITY FAIR 100 YEARS


england.

back & spotlight

England brings ambient and reading light together in a single, minimalist design. Its 28 mm diameter silhouette includes dual independent switches: a soft backlight to create atmosphere and an adjustable spotlight for comfortable reading. A smart choice for bedrooms requiring both mood and functionality.



	W	K	Real lm	▲	V
● 1.3002.1112	6 (back) 3 (spot)	3000	450	30°	100-240
● 1.3002.1212	6 (back) 3 (spot)	3000	450	30°	100-240

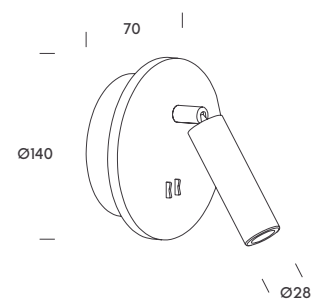




usa.

usb

USA combines a cylindrical spotlight and rectangular wall base to create a bold, geometric presence. With HP LED, integrated switch, and USB port, it offers precise light and practical connectivity. Its aluminium body makes it a modern and functional piece for hospitality or residential projects.



	W	K	Real lm	▲	V
● 1.3004.1111	3	2700	160	60°	100-240
● 1.3004.1211	3	2700	160	60°	100-240

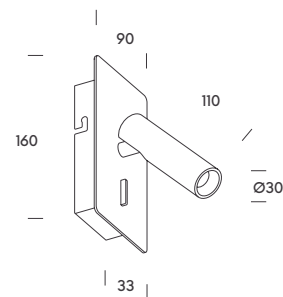

wall

track lights

panels & industrial

table

ceiling

wall


floor



bogota s.

reading

The most compact version of the Bogotá family preserves its clean, understated silhouette in a reduced format, perfect for headboards and rest areas. Compatible with GU10 bulbs and equipped with an on/off switch, it's available in white or black. A simple, elegant and versatile solution for hospitality or residential projects.



	W	Holder	V
● 1.3005.1190 (White inner ring)	3,5	GU10	100-240
● 1.3005.1290 (Black inner ring)	3,5	GU10	100-240

Lámpara MR11 no incluida.
MR11 bulb not included.
Lampe MR11 non incluse.

ACCESSORIES

	bulb	W	K	CRI	▲	V
● 1.2020.8000	MR11 GU10 Ø35mm	3W	3000	>80	40	230 1



1



wall

track lights

panels & industrial

table

ceiling

wall

floor

Related products



bogota square & round
page 104




bogota spotlight base
page 104



bogota pendant
page 113



bogota spotlight track
page 157

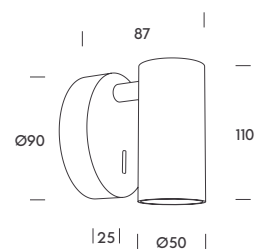



trinidad.

customizable

Trinidad was conceived for moments of rest, where light needs to feel both functional and welcoming. Its clean, balanced design fits naturally into hospitality and residential projects, delivering focused light ideal for reading. The option to select body and shade finishes allows it to integrate seamlessly into the visual language of the space.





	W E14 LED	Holder	W LED	K	Real lm	▲	V
● 1.3006.1112	Max. 6W	E14	3	3000	170	30°	100-240
● 1.3006.1212	Max. 6W	E14	3	3000	170	30°	100-240

Lámpara E14 no incluida.
E14 bulb not included.
Lampe E14 non incluse.

ACCESSORIES

● 1.3006.8001	White screen	1
● 1.3006.8002	Black screen	2
● 1.3006.8003	Beige screen	3

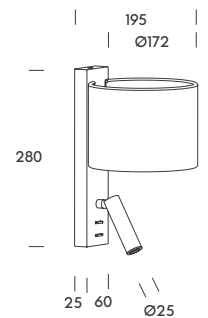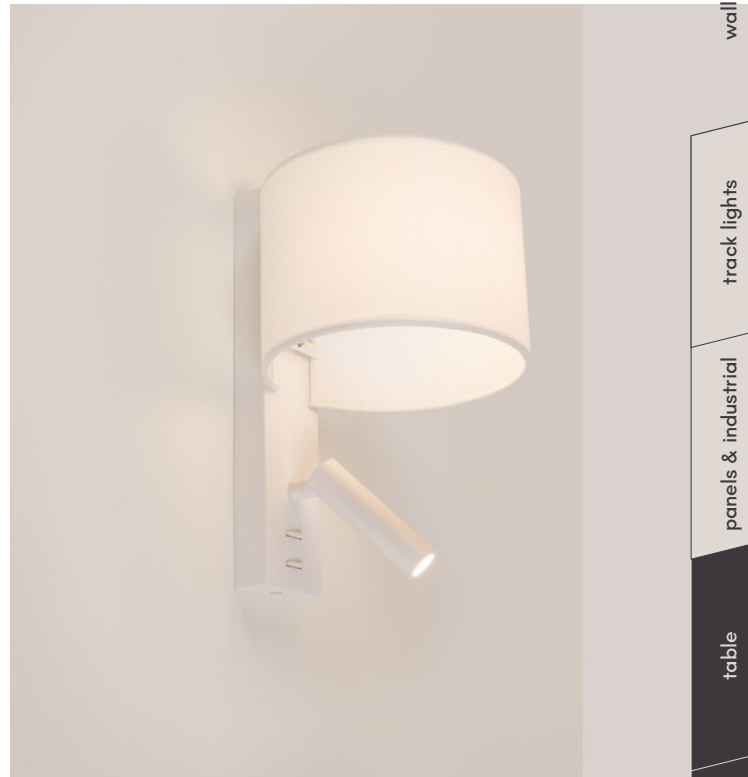

wall
track lights
panels & industrial
table
ceiling
wall
floor




crete.

super slim

Crete blends seamlessly into any setting with its slim 15 mm profile, casting a soft and ambient glow. Its beam angle and Triac dimming allow ceilings, domes, or vaults to be washed with gentle light, creating warm and inviting atmospheres for hospitality or residential projects.

 CRI >90
  TRIAC
 40.000H LIFE
 FLICKER FREE
 AL BODY
 PMMA DIFFUSER
 CB RETILAP

	W	K	Real lm	▲	V
● 1.3013.7111	20	2700	1340	110°	220-240
● 1.3013.7112	20	3000	1410	110°	220-240

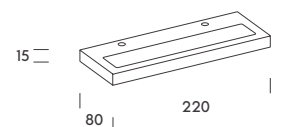






greece.

up & down

Designed to complement without overwhelming, Greece softens the space with a warm, diffuse Up & Down light. Its rectangular shape with rounded edges brings visual calm, blending naturally into hallways and transitional areas. With only 6 cm of depth, it's a discreet solution for projects that favour subtlety.

 CRI >80  DRIVER INCL PF >0,95 50.000H LIFE FLICKER FREE AL BODY **CB** RETILAP

	W	K	Real lm	V
● 1.3010.1111	8	2700	400	100-240
● 1.3010.1112	8	3000	400	100-240







copenhagen.


Copenhagen lets you introduce scenic lighting accents without visually overloading the space. Its clean, well-balanced design produces a 2700K Up & Down effect that fills the room with warmth. Available in two sizes, it fits easily into wall compositions or stands alone in interiors with a calm, contemporary language.



	W	K	Real lm	▲	V
copenhagen 150mm					
● 1.3011.1111	6	2700	423	155°	100-277
copenhagen 260mm					
● 1.3012.1111	6	2700	440	155°	100-277

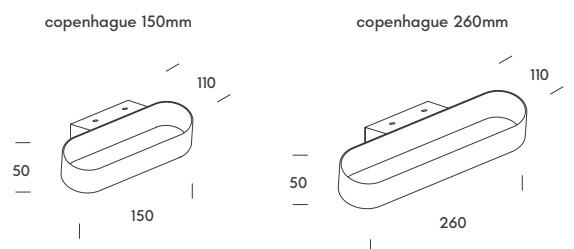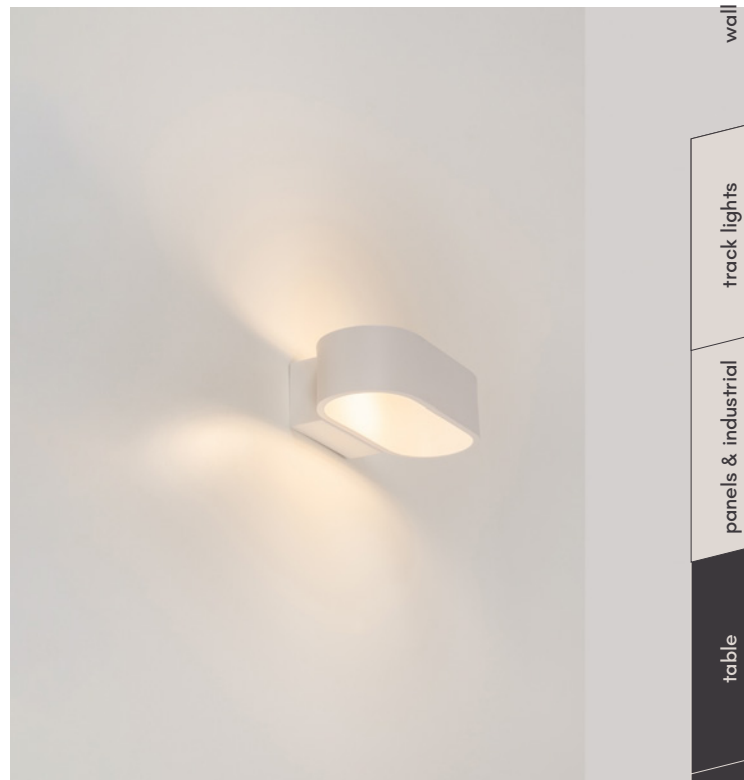

wall
track lights
panels & industrial
table
ceiling
wall
floor




cali.

bathroom

Cali blends into the space without taking over. Its 360° light output and minimalist design make it ideal near mirrors or in damp areas. With 3CCT technology and high colour rendering, it provides natural, functional light exactly where it's needed most.

□ IP 44 · IK 08 · CRI >90 · ON OFF · 35.000H LIFE · FLICKER FREE · PC BODY · PC DIFFUSER · 10 CM · **CB** · RETILAP

	W	K (3CCT)	Real lm (2K7-3K2-4K)	▲	V
● 1.3015.1218	12	2K7-3K2-4K	1215-1230-1200	360°	100-277

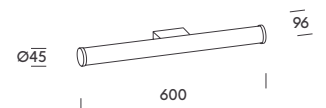



track
lights

3 phase spotlights	tokyo.	145
	japan.	149
	berlin.	151
	portugal.	153
	bonn.	155
	bogota.	157
	tracks 3 phases.	159
monza 24V system	monza 4.	163
	monza 8.	163
	monza 3 tube pendant.	163
	monza 6 line opal.	163
	monza 12 line lens.	163
	tracks monza	167
assen 48V system	assen 10.	171
	assen 15.	171
	assen 20.	171
	assen 10 double.	171
	assen 15 colors.	171
	assen 10 zoom.	171
	assen 20 zoom.	171
	assen 10 zoom pendant.	171
	assen 16 lens.	171
	assen 16 opal.	171
tracks assen.	177	

track lights

panels & industrial

table

ceiling

wall

floor

A photograph of a modern art gallery with dark walls and ceiling. A track lighting fixture, the 'Tokyo' spotlight, is mounted on the ceiling. It is illuminated, casting a warm glow on the surrounding area. The fixture has a long, thin, curved arm that holds a spherical, woven basket-like light source. The gallery floor is dark, and a doorway in the background leads to a brighter area. The overall atmosphere is sophisticated and artistic.

tokyo.

Tokyo is our most technical and versatile spotlight, designed for full lighting control. Its adjustable zoom (15°-55°), CCT Switch (2700K / 3000K / 4000K), and dimming function let you sculpt the light as needed. For retail or exhibitions, Tokyo offers precision, elegance and adaptability.



track lights

panels & industrial

table

ceiling

wall

floor

tokyo.

zoom-dim

Tokyo is our most technical and versatile spotlight, designed for full lighting control. Its adjustable zoom (15°-55°), CCT Switch (2700K / 3000K / 4000K), and dimming function let you sculpt the light as needed. For retail or exhibitions, Tokyo offers precision, elegance and adaptability.



	W	K (3CCT)	Real lm (2K7-3K-4K)	▲	V
tokyo 15					
● 1.5005.2118	15	2K7-3K-4K	955-985-1060 (15°) 1080-1115-1200 (55°)	15°-55°	220-240
● 1.5005.2218	15	2K7-3K-4K	955-985-1060 (15°) 1080-1115-1200 (55°)	15°-55°	220-240
tokyo 25					
● 1.5006.2118	25	2K7-3K-4K	1800-1860-2000 (15°) 1955-2025-2175 (55°)	15°-55°	220-240
● 1.5006.2218	25	2K7-3K-4K	1800-1860-2000 (15°) 1955-2025-2175 (55°)	15°-55°	220-240

Compatible con carril trifasico.
Compatible with three-phase rail.
Compatible avec rail triphasé.

	W	K (3CCT)	Real lm (2K7-3K-4K)	▲	V
tokyo 15 dali					
● 1.5005.3118	15	2K7-3K-4K	955-985-1060 (15°) 1080-1115-1200 (55°)	15°-55°	220-240
● 1.5005.3218	15	2K7-3K-4K	955-985-1060 (15°) 1080-1115-1200 (55°)	15°-55°	220-240
tokyo 30 dali					
● 1.5006.3118	30	2K7-3K-4K	1800-1860-2000 (15°) 1955-2025-2175 (55°)	15°-55°	220-240
● 1.5006.3218	30	2K7-3K-4K	1800-1860-2000 (15°) 1955-2025-2175 (55°)	15°-55°	220-240

Compatible con carril dali.
Compatible with dali track.
Compatible avec rail dali.

ACCESSORIES

- 1.5005.8001 Honeycomb tokyo 15 & tokyo dali 1



On-Off



Dali



track lights


panels & industrial

table

ceiling

wall

floor

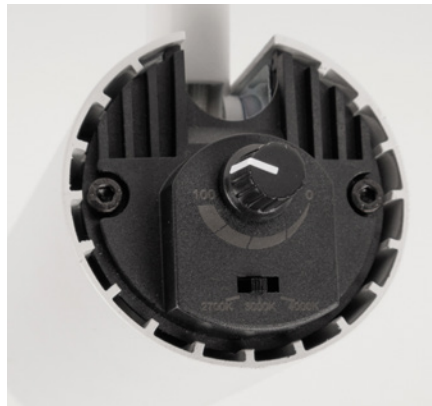


CCT switch and dimming




Zoom


tokyo 15




tokyo 15 dali



tokyo 25



tokyo 25 dali





Prime Matter Gallery, Lisbon, Portugal . Architect Davide Ntarelli . Lighting Project JustLIGHT . Photography Babled Studio

japan.

zoom-dim

Japan is a functional spotlight with a discreet and refined design. Its aluminum body, dimming function and beam angle adjustment (15°-50°) bring visual clarity to demanding projects. With Ø85 mm and track compatibility, it highlights key elements while keeping a minimal presence.



	W	K	Real lm	▲	V
● 1.5001.2112	25	3000	2330 (15°) - 2390 (50°)	15°-50°	100-240
● 1.5001.2212	25	3000	2330 (15°) - 2390 (50°)	15°-50°	100-240
● 1.5001.2114	25	4000	2440 (15°) - 2500 (50°)	15°-50°	100-240
● 1.5001.2214	25	4000	2440 (15°) - 2500 (50°)	15°-50°	100-240



track lights


panels & industrial

table

ceiling

wall

floor

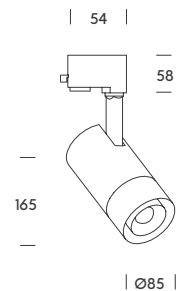



berlin.

Berlin is designed for those who seek powerful and stylish solutions. Available in two sizes and power ranges, it adapts to any lighting scenario. Its CCT Switch (2700K-3200K-4000K), 45° beam and clean finish make it the ideal choice for commercial or exhibition spaces.

 IP 20 ·
  CRI >80 ·
  UGR <19 ·
  PF >0,9 ·
  40.000H LIFE ·
  FLICKER FREE ·
  3 PHASES ·
  350° ·
  90° ·
  PA BODY ·
  AL REFLECTOR ·
  CB ·
  RETILAP

	W (multi)	K (3CCT)	Real lm (2K7-3K2-4K)	▲	V
berlin 20					
● 1.5026.1118	14 21	2K7-3K2-4K	1200-1360-1300 1660-1925-1780	45°	220-240
● 1.5026.1218	14 21	2K7-3K2-4K	1200-1360-1300 1660-1925-1780	45°	220-240
berlin 30					
● 1.5027.1118	21 30	2K7-3K2-4K	1730-1955-1860 2230-2625-2440	45°	220-240
● 1.5027.1218	21 30	2K7-3K2-4K	1730-1955-1860 2230-2625-2440	45°	220-240

ACCESSORIES ▲

● 1.5026.8001	Reflector berlin 20	60°
● 1.5027.8001	Reflector berlin 30	60°



track lights


panels & industrial

table

ceiling

wall

floor

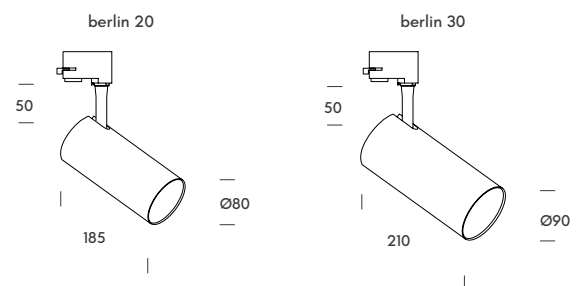



portugal.


Portugal delivers precise focal lighting in a compact Ø45 mm format. With integrated COB LED (2700K), CRI>90 and UGR<19, it ensures comfortable, glare-free light. TRIAC dimmable and track-compatible, it's a discreet and effective solution for retail, residential, or display spaces.



	W	K	Real lm	▲	V
● 1.5020.7111	7	2700	470	24°	220-240
● 1.5020.7211	7	2700	470	24°	220-240

ACCESSORIES

		▲
● 1.5020.8001	Lens	15° 1
● 1.5020.8002	Lens	36° 1
● 1.5020.8003	Lens	45° 1
● 1.5020.8005	Honeycomb	- 2



track lights


panels & industrial

table

ceiling

wall

floor

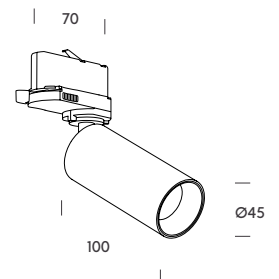





bonn.

Compact yet powerful, Bonn balances design, performance and efficiency. Its optimized air-cooled system ensures stable lighting with a clean look. With CCT Switch and multiple versions, it's ideal for projects that require flexibility, consistency and visual harmony across one space.

 IP 20 · CRI >90 · UGR <19 · PF >0,95 · 50.000H LIFE · FLICKER FREE ·  PHASES ·  355° ·  90° · AL BODY · PMMA LENS · **CB** · RETILAP

	W	K (3CCT)	Real lm (2K7-3K2-4K)	▲	V
bonn 20					
● 1.5035.1118	20	2K7-3K2-4K	1660-1800-1700	30°	220-240
● 1.5035.1218	20	2K7-3K2-4K	1660-1800-1700	30°	220-240
bonn 30					
● 1.5036.1118	30	2K7-3K2-4K	2490-2700-2250	30°	220-240
● 1.5036.1218	30	2K7-3K2-4K	2490-2700-2250	30°	220-240

ACCESSORIES			▲
● 1.5035.8001	Lens	20°	1
● 1.5035.8002	Lens	40°	1
● 1.5035.8003	Lens	50°	1
● 1.5035.8101	White ring	-	2
● 1.5035.8005	Honeycomb	-	3

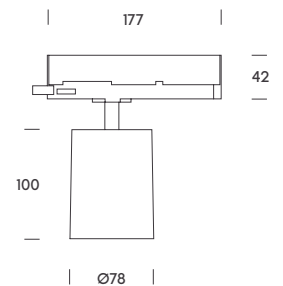

Related products




bonn downlight
page 061



bogota.

GU10

A family built on functionality and visual coherence. Its sober, minimalist cylindrical design is available as pendant, surface-mounted or projector for track or base. Compatible with GU10 bulbs, it's a versatile option for everyday projects seeking flexibility without losing a clear, cohesive aesthetic.



	W	Holder	V
● 1.5190.1190 (Black inner ring)	Max. 10	GU10 LED	100-240
● 1.5190.1290 (Gold inner ring)	Max. 10	GU10 LED	100-240

Lámpara GU10 no incluida.
GU10 bulb not included.
Lampe GU10 non incluse.

ACCESSORIES

- 1.2020.8101 Honeycomb + pliers 1



1



track lights

panels & industrial


table

ceiling

wall

floor

Related products



bogota square & round
page 104




bogota spotlight base
page 104



bogota pendant
page 113



bogota s
page 131



track.



on-off
16A . 100-240V



●	1.5000.8102	2m on-off track
●	1.5000.8202	2m on-off track
●	1.5000.8103	3m on-off track
●	1.5000.8203	3m on-off track

ACCESSORIES

●	1.5000.8110	Left earth electrode	1
●	1.5000.8111	Right earth electrode	1
●	1.5000.8210	Left earth electrode	1
●	1.5000.8211	Right earth electrode	1
●	1.5000.8118	End cap	2
●	1.5000.8218	End cap	2
●	1.5000.8116	Straight joint	3
●	1.5000.8216	Straight joint	3
●	1.5000.8112	Central connector	4
●	1.5000.8212	Central connector	4
●	1.5000.8113	Left L-connector	5
●	1.5000.8114	Right L-connector	5
●	1.5000.8213	Left L-connector	5
●	1.5000.8214	Right L-connector	5
●	1.5000.8120	Left T-connector	6
●	1.5000.8121	Right T-connector	6
●	1.5000.8220	Left T-connector	6
●	1.5000.8221	Right T-connector	6
●	1.5000.8117	Flexible joint	7
●	1.5000.8217	Flexible joint	7
●	1.5000.8001	5m. suspension kit	8
●	1.5000.8002	5m. suspension kit	8
●	1.5000.8101	Surface mounted base	9
●	1.5000.8201	Surface mounted base	9

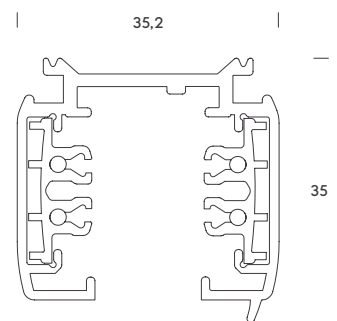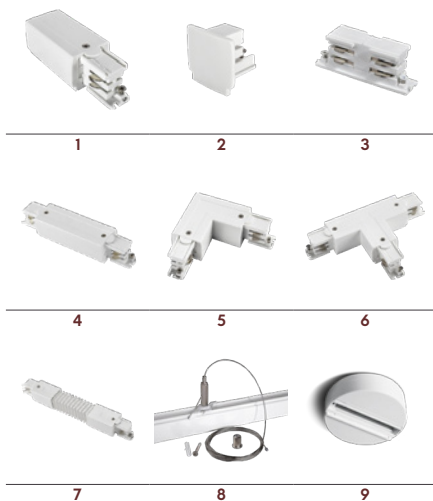


Scale 1:1




Peugeot Maam, Barcelona, Spain .


- 1** Left earth electrode
Right earth electrode




- 2** End cap




- 3** Straight joint




- 4** Central connector

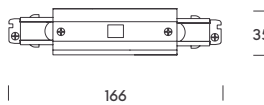


- 5** Left L-connector
Right L-connector




- 6** Left T-connector
Right T-connector

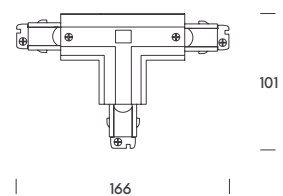


- 7** Flexible joint



- 8** 5m. suspension kit



- 9** Surface mounted base



track.




dali
16A . 100-240V



●	1.5000.8152	2m dali track
●	1.5000.8252	2m dali track
●	1.5000.8153	3m dali track
●	1.5000.8253	3m dali track

ACCESSORIES

●	1.5000.8160	Left earth electrode	1
●	1.5000.8161	Right earth electrode	1
●	1.5000.8260	Left earth electrode	
●	1.5000.8261	Right earth electrode	
●	1.5000.8118	End cap	2
●	1.5000.8218	End cap	
●	1.5000.8166	Straight joint	3
●	1.5000.8266	Straight joint	
●	1.5000.8162	Central connector	4
●	1.5000.8262	Central connector	
●	1.5000.8163	Left L-connector	5
●	1.5000.8164	Right L-connector	5
●	1.5000.8263	Left L-connector	
●	1.5000.8264	Right L-connector	
●	1.5000.8170	Left T-connector (L1 & R1 DALI)	6
●	1.5000.8171	Right T-connector (L1 & R1 DALI)	6
●	1.5000.8270	Left T-connector (L1 & R1 DALI)	
●	1.5000.8271	Right T-connector (L1 & R1 DALI)	
●	1.5000.8172	Left T-connector (L2 & R2 DALI)	
●	1.5000.8173	Right T-connector (L2 & R2 DALI)	
●	1.5000.8272	Left T-connector (L2 & R2 DALI)	
●	1.5000.8273	Right T-connector (L2 & R2 DALI)	
●	1.5000.8167	Flexible joint	7
●	1.5000.8267	Flexible joint	
●	1.5000.8001	5m. suspension kit	8
●	1.5000.8002	5m. suspension kit	

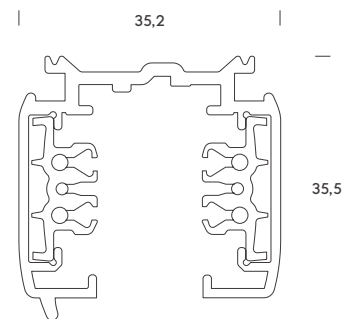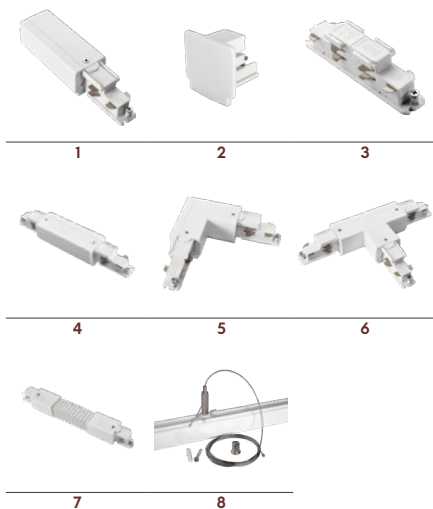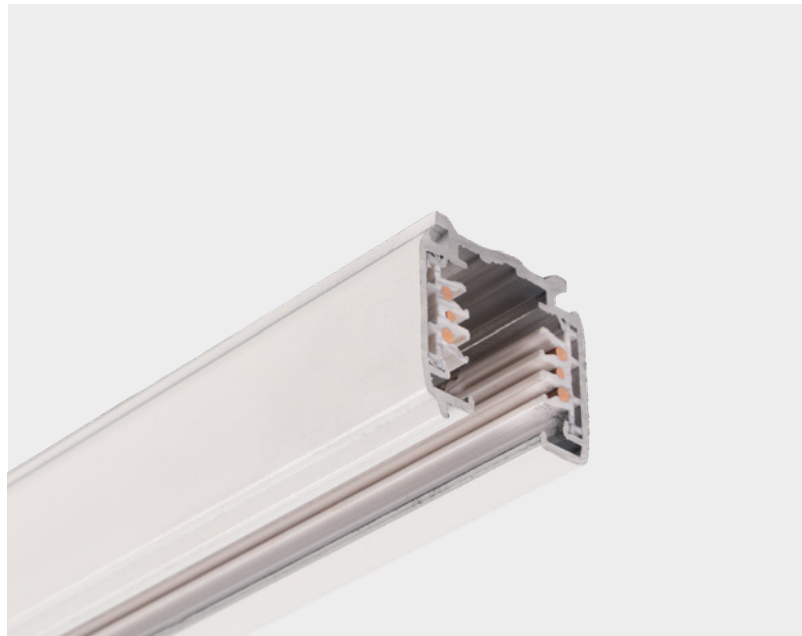

Scale 1:1



Alzueta Gallery, Barcelona, Spain . Photography Javier Márquez Studio

track lights

panels & industrial


table

ceiling


wall

floor


1 Left earth electrode
Right earth electrode




2 End cap




3 Straight joint




4 Central connector




5 Left L-connector
Right L-connector




6 Left T-connector
Right T-connector

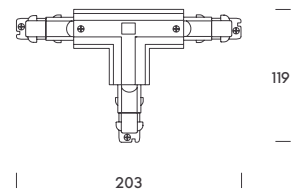

7 Flexible joint



8 5m. suspension kit





monza.

24V system

A clean, minimal and sophisticated line. Monza is our 24V system that takes miniaturisation further half the thickness of a standard setup. It blends naturally into ceilings or walls and supports multiple luminaires, from accent spotlights to ambient modules. A subtle solution for refined accent lighting in your most demanding projects.



track lights

panels & industrial

table

ceiling

wall

floor

monza.

24V system





	W	K	Real lm	▲
monza 4				
● 1.5701.1211	4	2700	260	24°
monza 8				
● 1.5702.1211	8	2700	610	24°
monza 3 tube pendant*				
● 1.5707.1211	3	2700	180	36°
monza 6 line opal *				
● 1.5712.1211	6	2700	230	110°
monza 12 lens				
● 1.5711.1211	12	2700	1180	45°

* Monza 3 panel de abeja incluido.
 Monza 6 se puede cortar en cualquier punto.
 Monza 3 honeycomb included.
 Monza 6 free-cuttable along its entire length.
 Monza 3 avec nid d'abeille inclus.
 Monza 6 peut être coupé librement sur toute sa longueur.

ACCESSORIES

- 1.5701.8001 Honeycomb for monza 4
- 1.5702.8001 Honeycomb for monza 8

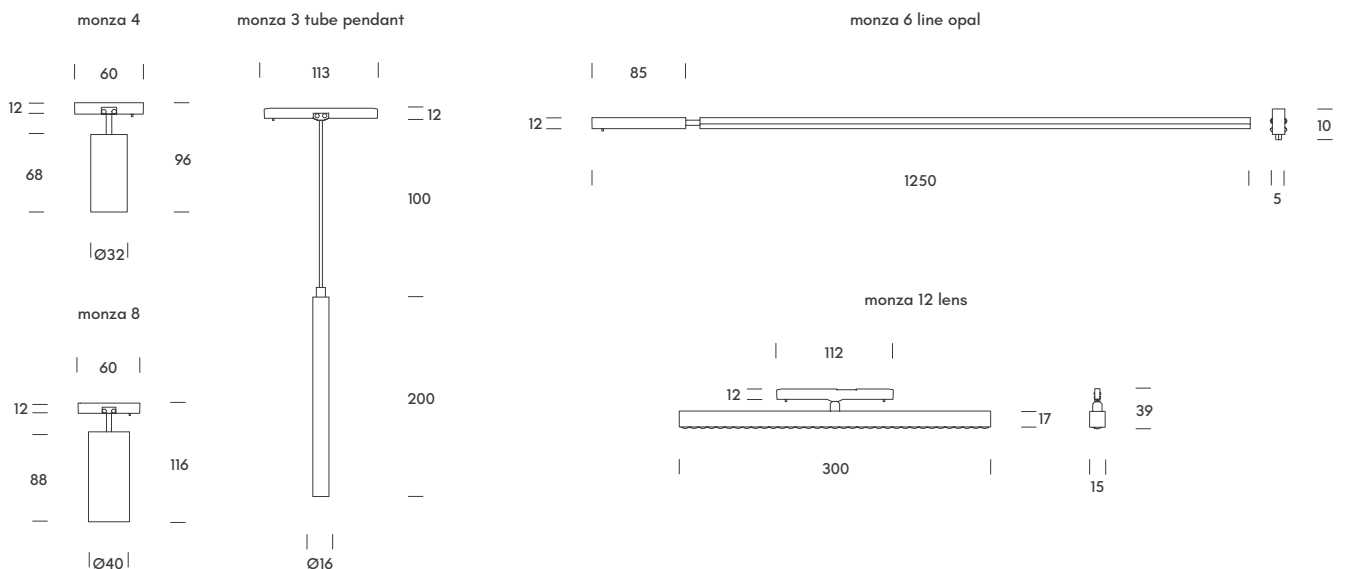

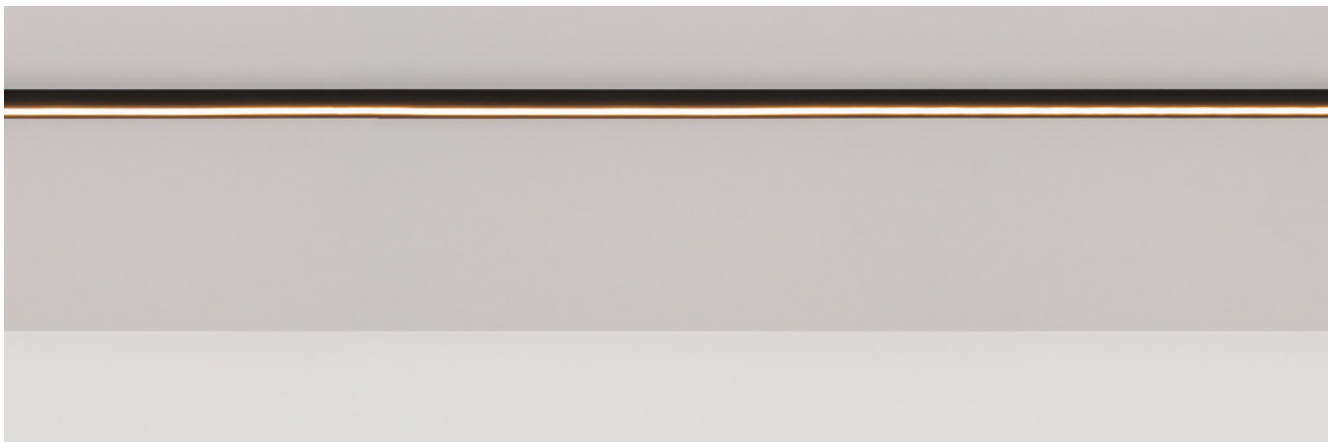

track lights

panels & industrial

table

ceiling

wall

floor

monza.



surface track 24V



- 1.5700.8201 1m surface track
- 1.5700.8202 2m surface track

ACCESSORIES

- 1.5700.8222 Cover track 1m. 0
- 1.5700.8220 Power connector 1
- 1.5700.8211 L joint + electrical connector 2
- 1.5700.8221 Flexible electrical connector (24cm) 3
- 1.5700.8223 Flexible electrical connector (15cm) 3
- 1.5700.8212 L joint wall-ceiling + electrical connector 4
- 1.5700.8214 End cap 5

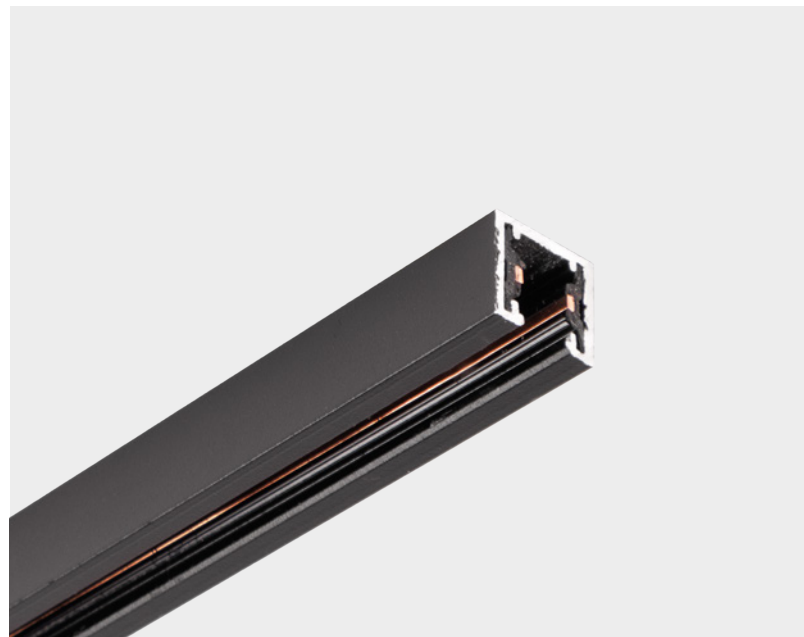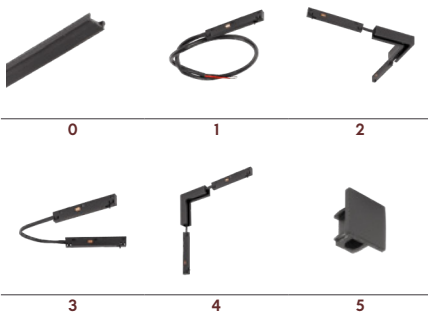

REMOTE POWER SUPPLY ON-OFF

	W	Vac	V
4.2032.1101	75	176-264	24
4.2032.1102	150	198-264	24

REMOTE POWER SUPPLY TRIAC


	W	Vac	V
4.2032.7101	60	200-240	24
4.2032.7102	150	200-240	24

REMOTE POWER SUPPLY DALI & PUSH

	W	Vac	V
4.2062.6101	80	176-264	24
4.2062.6102	150	176-264	24

REMOTE POWER SUPPLY CASAMBI


	W	Vac	V
4.9101.5003	150	198-264	24




Scale 1:1

Your own configuration


Track shown with power feed from right

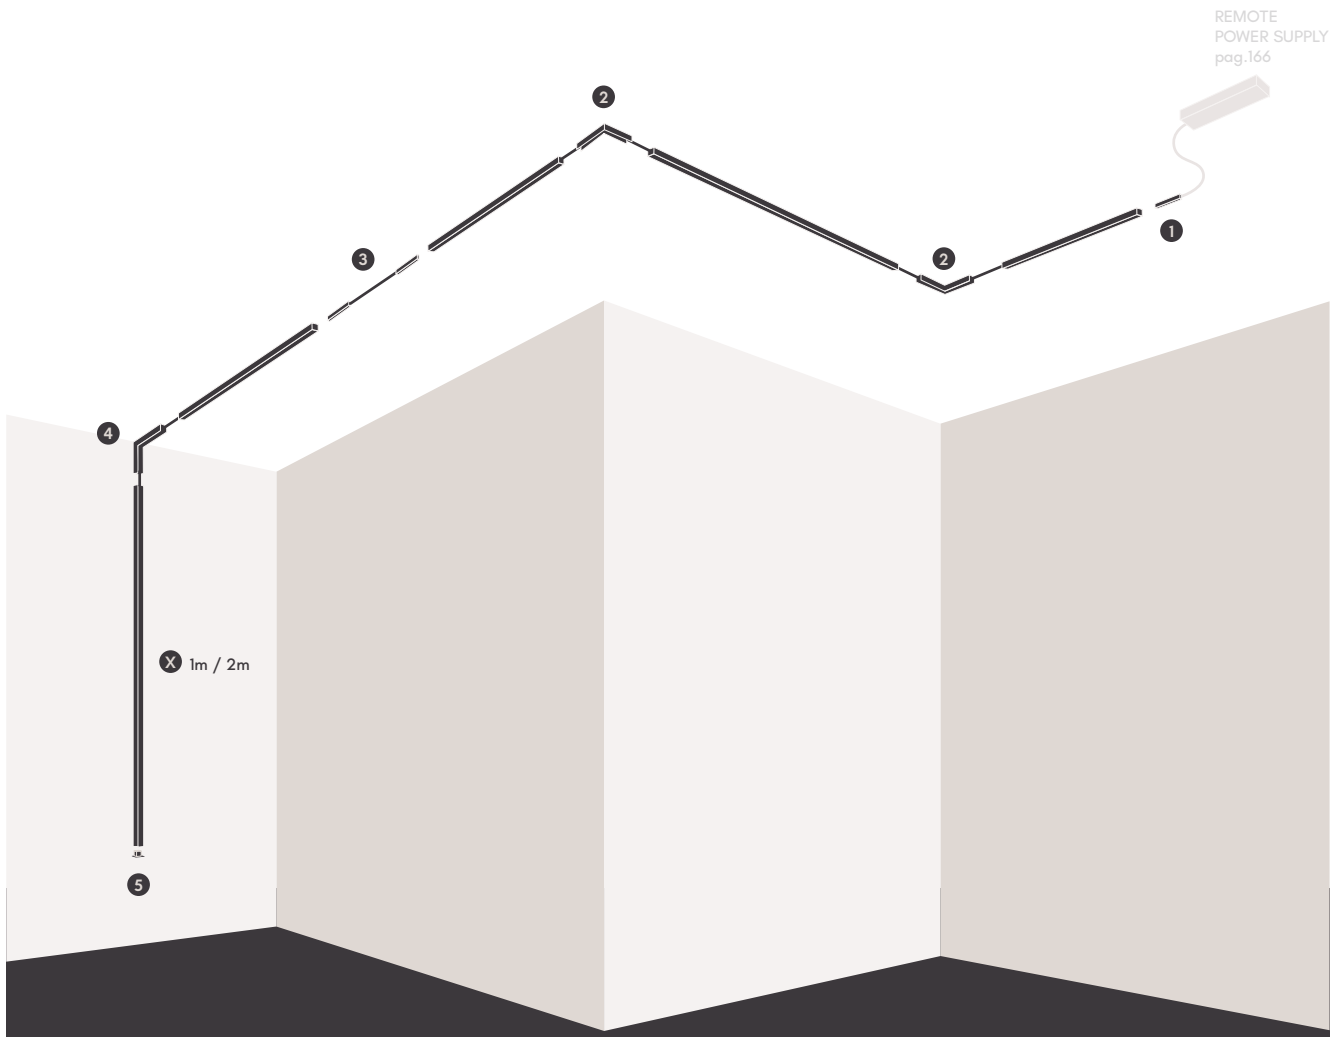


0 Cover track




1 Power connector




2 L joint + electrical connector



3 Flexible electrical connector

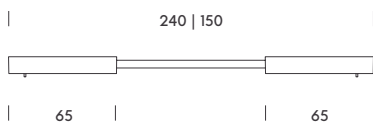

4 L joint wall-ceiling + electrical connector



5 End cap



track lights

panels & industrial

table

ceiling

wall

floor

monza.



recessed trimless 24V



- 1.5700.8204 1m trimless track
- 1.5700.8205 2m trimless track

ACCESSORIES

- 1.5700.8222 Cover track 1m. 0
- 1.5700.8220 Power connector 1
- 1.5700.8216 L joint + electrical connector 2
- 1.5700.8221 Flexible electrical connector (24cm) 3
- 1.5700.8223 Flexible electrical connector (15cm) 3
- 1.5700.8217 L joint wall-ceiling + electrical connector 4
- 1.5700.8219 End cap 5

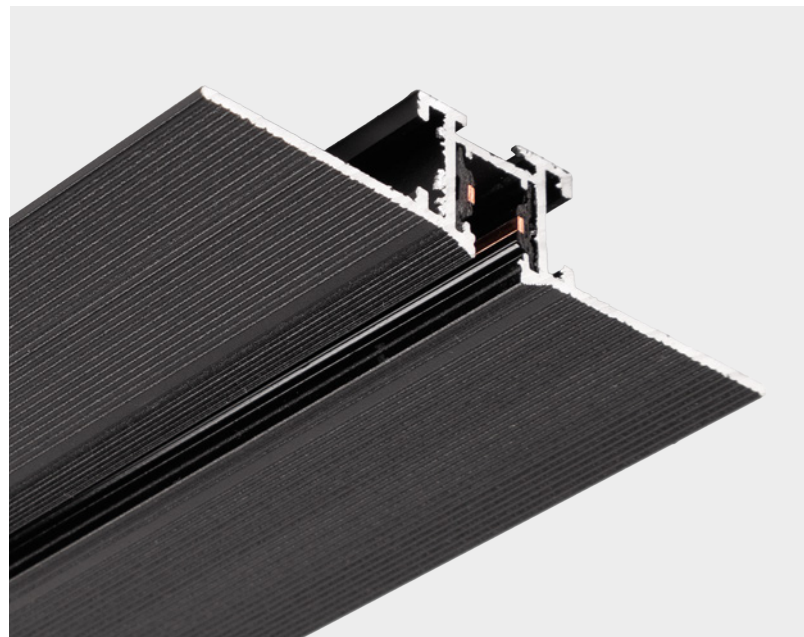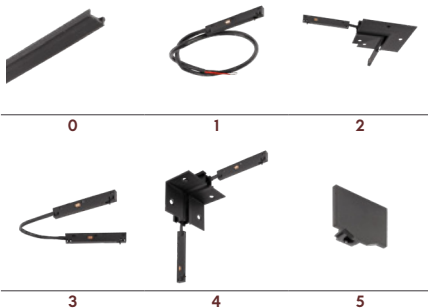

REMOTE POWER SUPPLY ON-OFF

	W	Vac	V
4.2032.1101	75	176-264	24
4.2032.1102	150	198-264	24

REMOTE POWER SUPPLY TRIAC


	W	Vac	V
4.2032.7101	60	200-240	24
4.2032.7102	150	200-240	24

REMOTE POWER SUPPLY DALI & PUSH

	W	Vac	V
4.2062.6101	80	176-264	24
4.2062.6102	150	176-264	24

REMOTE POWER SUPPLY CASAMBI

	W	Vac	V
4.9101.5003	150	198-264	24

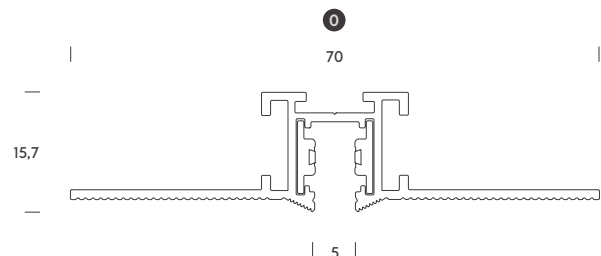


Scale 1:1


Your own configuration

Track shown with power feed from right


REMOTE
POWER SUPPLY
pag.168

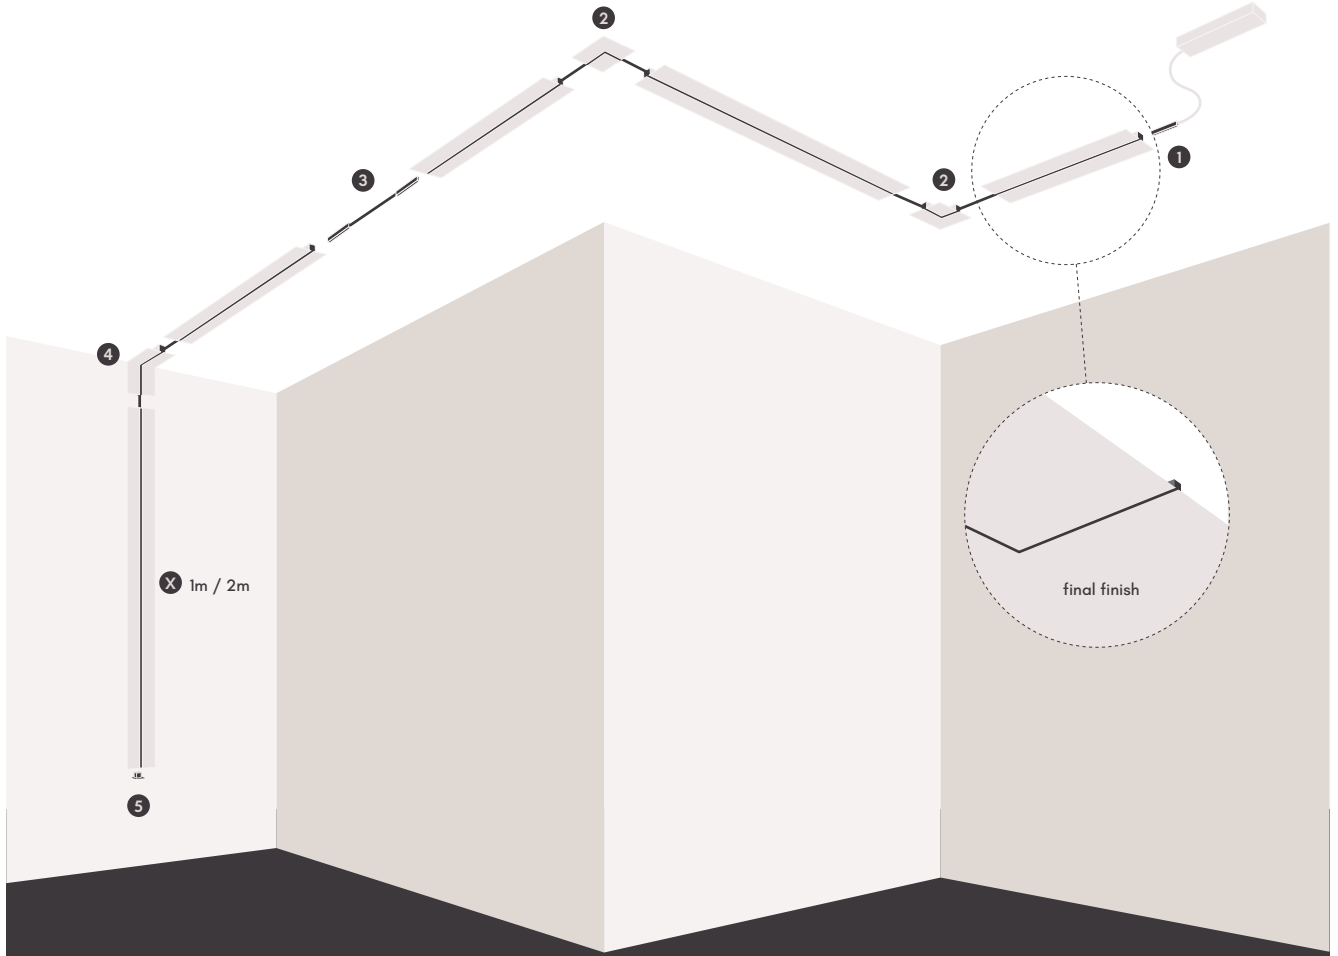


0 Cover track




1 Power connector




2 L joint + electrical connector




3 Flexible electrical connector

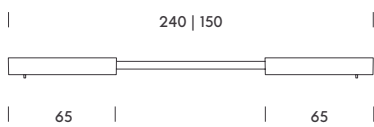

4 L joint wall-ceiling + electrical connector



5 End cap

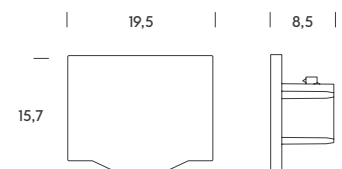

track lights

panels & industrial

table

ceiling

wall

floor



assen.

48V system

A versatile 48V track system, Assen supports multiple luminaires from spotlights and pendants to linear modules. Available in surface, recessed, or suspended versions, it adapts seamlessly to any space. An elegant solution for precise, harmonious lighting, from residential to retail projects.



track lights

panels & industrial

table

ceiling

wall

floor

assen.

48V system



	W	Control	K	Real lm	▲
assen 10					
● 1.5601.1211	10	on-off	2700	840	30°
● 1.5601.1212	10	on-off	3000	880	30°
● 1.5601.3211	10	DALI 2	2700	840	30°
● 1.5601.3212	10	DALI 2	3000	880	30°
assen 15					
● 1.5602.1211	15	on-off	2700	1260	30°
● 1.5602.1212	15	on-off	3000	1320	30°
● 1.5602.3211	15	DALI 2	2700	1260	30°
● 1.5602.3212	15	DALI 2	3000	1320	30°
assen 20					
● 1.5603.1211	20	on-off	2700	1740	30°
● 1.5603.1212	20	on-off	3000	1820	30°
● 1.5603.3211	20	DALI 2	2700	1740	30°
● 1.5603.3212	20	DALI 2	3000	1820	30°
assen 10 double					
● 1.5621.1211	2x10	on-off	2700	2x840	30°
● 1.5621.1212	2x10	on-off	3000	2x880	30°
● 1.5621.3211	2x10	DALI 2	2700	2x840	30°
● 1.5621.3212	2x10	DALI 2	3000	2x880	30°

ACCESSORIES

- 1.5601.8001 Honeycomb for assen 10
- 1.5602.8001 Honeycomb for assen 15
- 1.5603.8001 Honeycomb for assen 20









	W	Control	K	Real lm	▲
assen 15 colors					
● 1.5632.1211	15	on-off	2700	1200	15°
● 1.5632.1212	15	on-off	3000	1250	15°
● 1.5632.3211	15	DALI 2	2700	1200	15°
● 1.5632.3212	15	DALI 2	3000	880	15°

ACCESSORIES

for assen 15 colors


- 1.5632.8101 Tube white 1
- 1.5632.8102 Tube black 2
- 1.5632.8103 Tube brushed rose gold 3
- 1.5632.8104 Tube brushed gold 4
- 1.5632.8105 Tube brushed bronze 5
- 1.5632.8106 Tube electroplated titanium 6
- 1.5632.8107 Tube electroplated nickel 7
- 1.5632.8002 Lens 24° 8
- 1.5632.8003 Lens 36° 8
- 1.5632.8001 Honeycomb 9

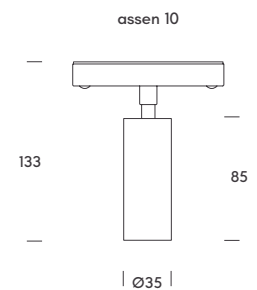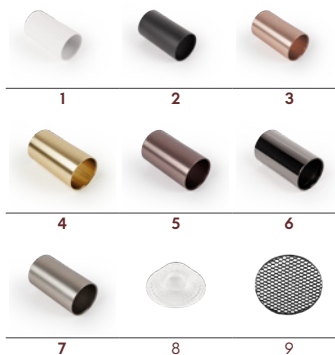

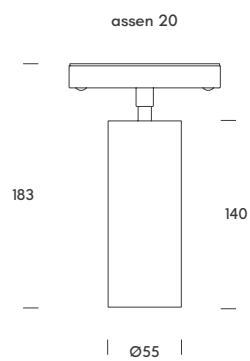

assen.


48V system





	W	Control	K	Real lm	▲
assen 10 zoom					
● 1.5605.1211	10	on-off	2700	735	15-36°
● 1.5605.1212	10	on-off	3000	770	15-36°
● 1.5605.3211	10	DALI 2	2700	735	15-36°
● 1.5605.3212	10	DALI 2	3000	770	15-36°
assen 20 zoom					
● 1.5606.1211	20	on-off	2700	1470	15-36°
● 1.5606.1212	20	on-off	3000	1550	15-36°
● 1.5606.3211	20	DALI 2	2700	1470	15-36°
● 1.5606.3212	20	DALI 2	3000	1550	15-36°
assen 10 zoom pendant*					
● 1.5607.1211	10	on-off	2700	735	15-36°
● 1.5607.1212	10	on-off	3000	770	15-36°
● 1.5607.3211	10	DALI 2	2700	735	15-36°
● 1.5607.3212	10	DALI 2	3000	770	15-36°

	W	Control	K	Real lm	▲
assen 16 lens					
● 1.5611.1211	16	on-off	2700	920	30°
● 1.5611.1212	16	on-off	3000	960	30°
● 1.5611.3211	16	DALI 2	2700	920	30°
● 1.5611.3212	16	DALI 2	3000	960	30°
assen 16 opal					
● 1.5612.1211	16	on-off	2700	840	100°
● 1.5612.1212	16	on-off	3000	880	100°
● 1.5612.3211	16	DALI 2	2700	840	100°
● 1.5612.3212	16	DALI 2	3000	880	100°

* Assen 10 zoom pendant con suspensión ajustable 1.5m.
 Assen 10 zoom pendant with adjustable suspension 1.5m.
 Assen 10 zoom pendant avec suspension réglable 1.5m

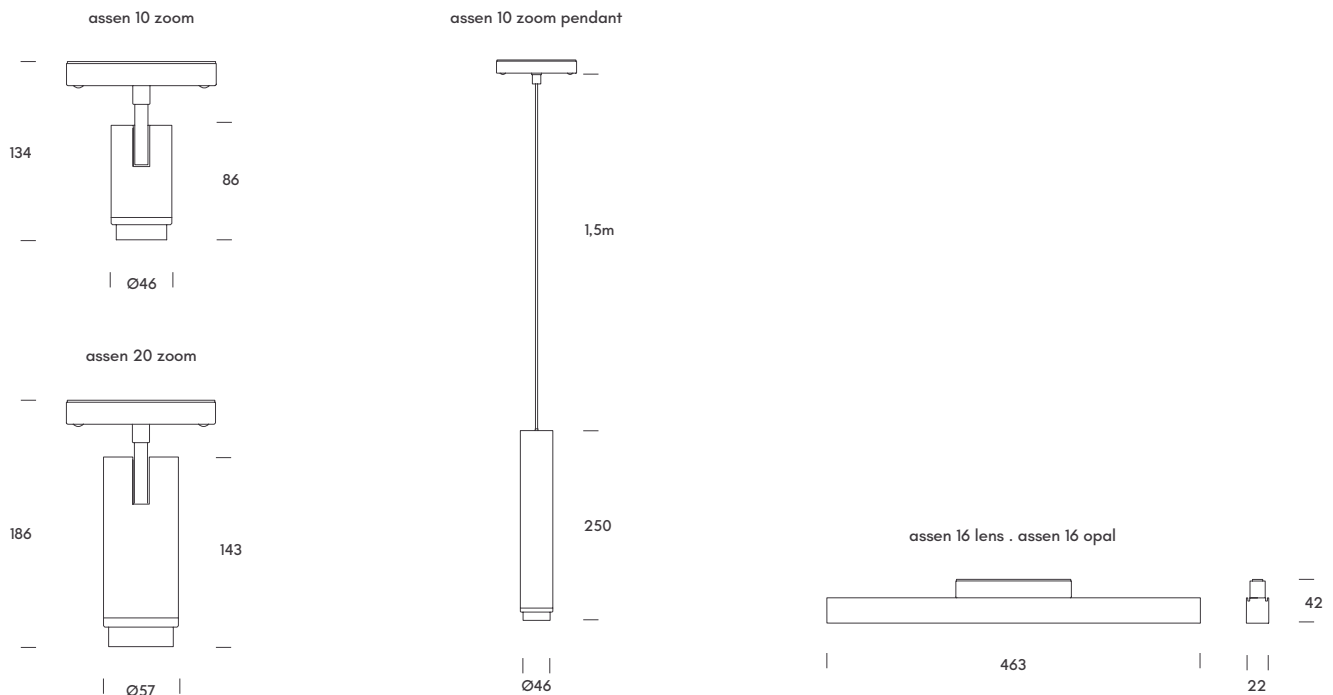

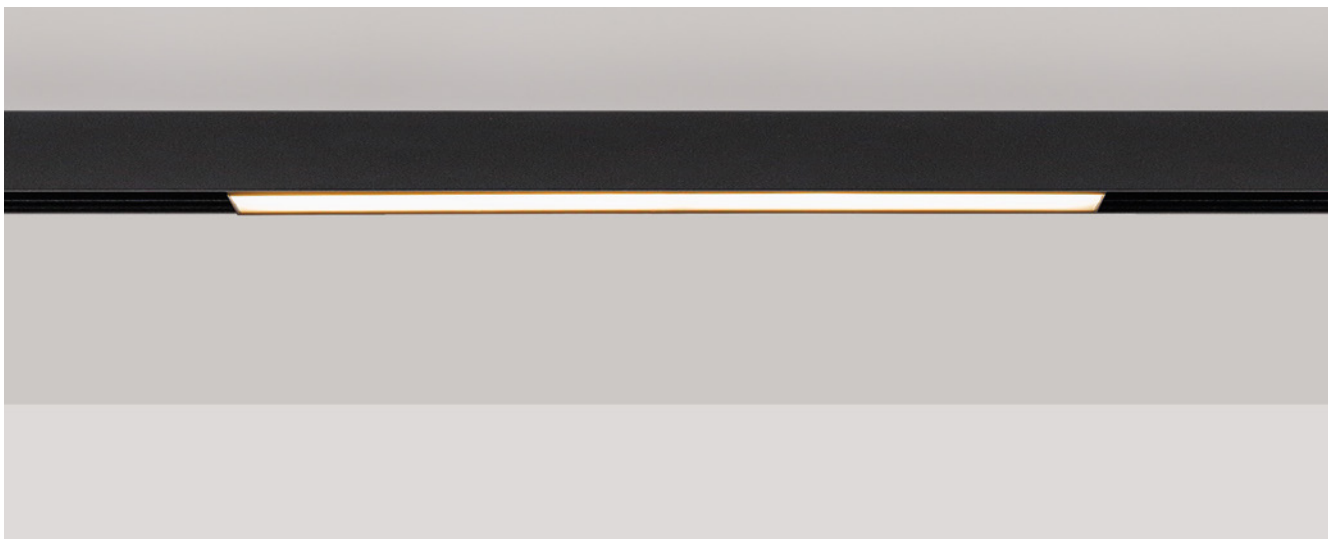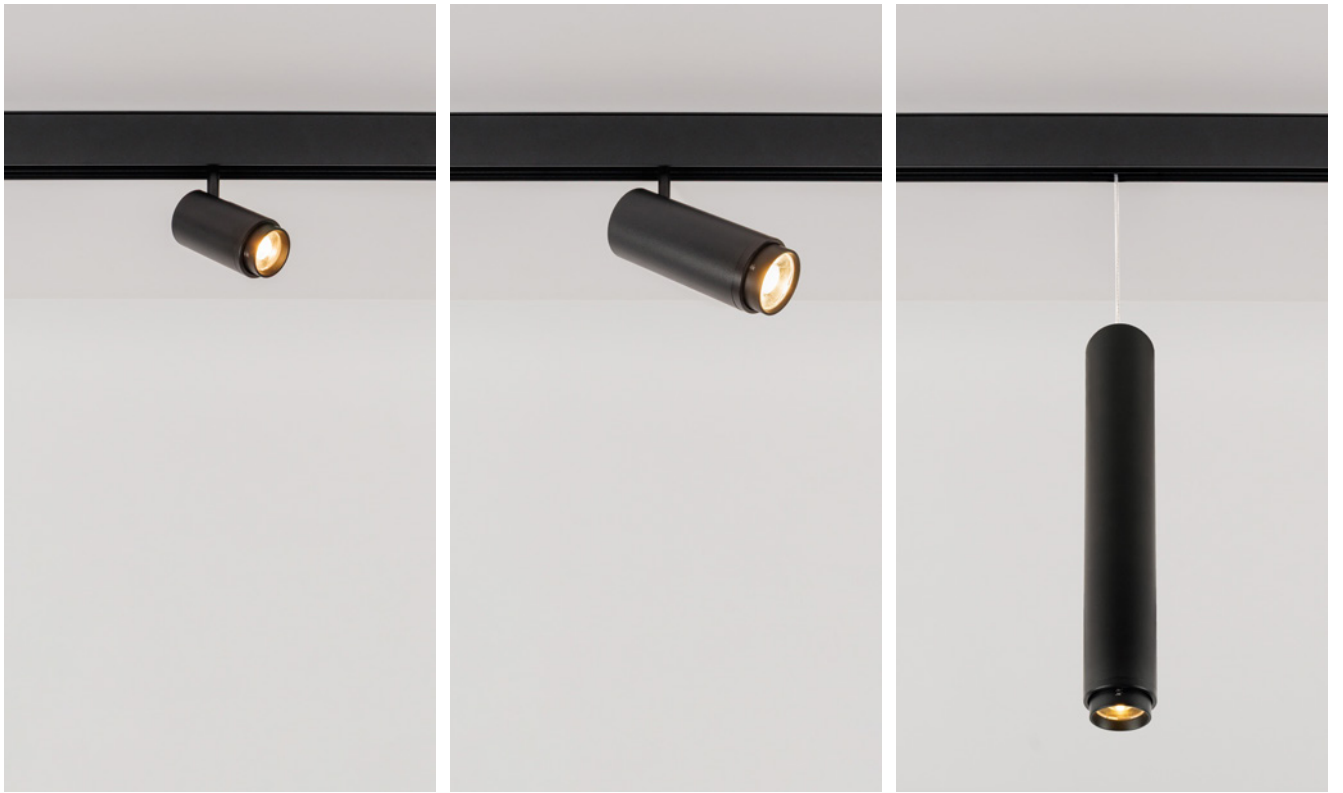

track lights

panels & industrial

table

ceiling

wall

floor

assen.

surface track 48V





- 1.5600.8201 1m surface track
- 1.5600.8202 2m surface track

ACCESSORIES

- 1.5600.8210 Cover track 2m. 0
- 1.5600.8231 Right power connector * 1
- 1.5600.8230 Left power connector * 1
- 1.5600.8212 Right L joint 2
- 1.5600.8234 Electrical connector L ** 3
- 1.5600.8235 Flexible electrical connector 4
- 1.5600.8211 Left L joint 5
- 1.5600.8232 Intermedium electrical connector 6
- 1.5600.8213 L joint wall-ceiling 7
- 1.5600.8215 End cap 8
- 1.5600.8001 3m. suspension kit 9

* Cable not included

** Recommended for suspended applications
(Not suitable for L joints wall-ceiling)

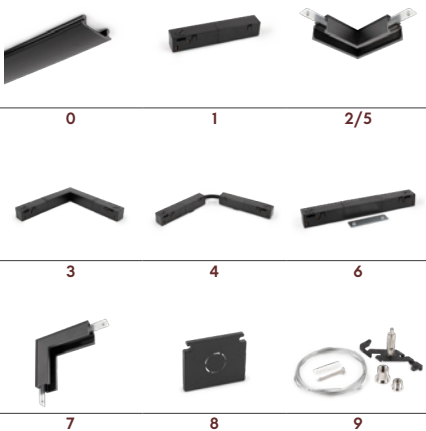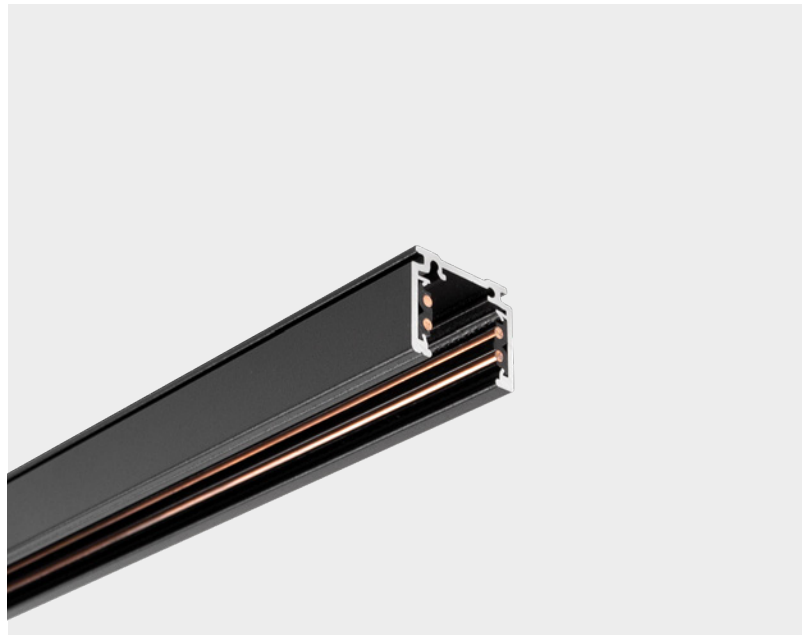


INNER TRACK POWER SUPPLY ON-OFF & DALI

	W	Vac	V
1.5600.8002	100	220-240	48

30cm cable included

REMOTE POWER SUPPLY ON-OFF


	W	Vac	V
4.2014.1101	150	120-240	48
4.2034.1102	150	220-240	48
4.2034.1101	240	220-240	48

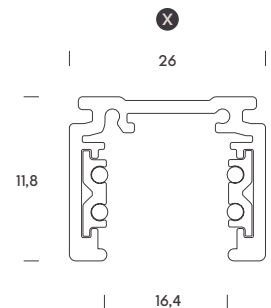

Scale 1:1

Your own configuration


Track shown with power feed from right

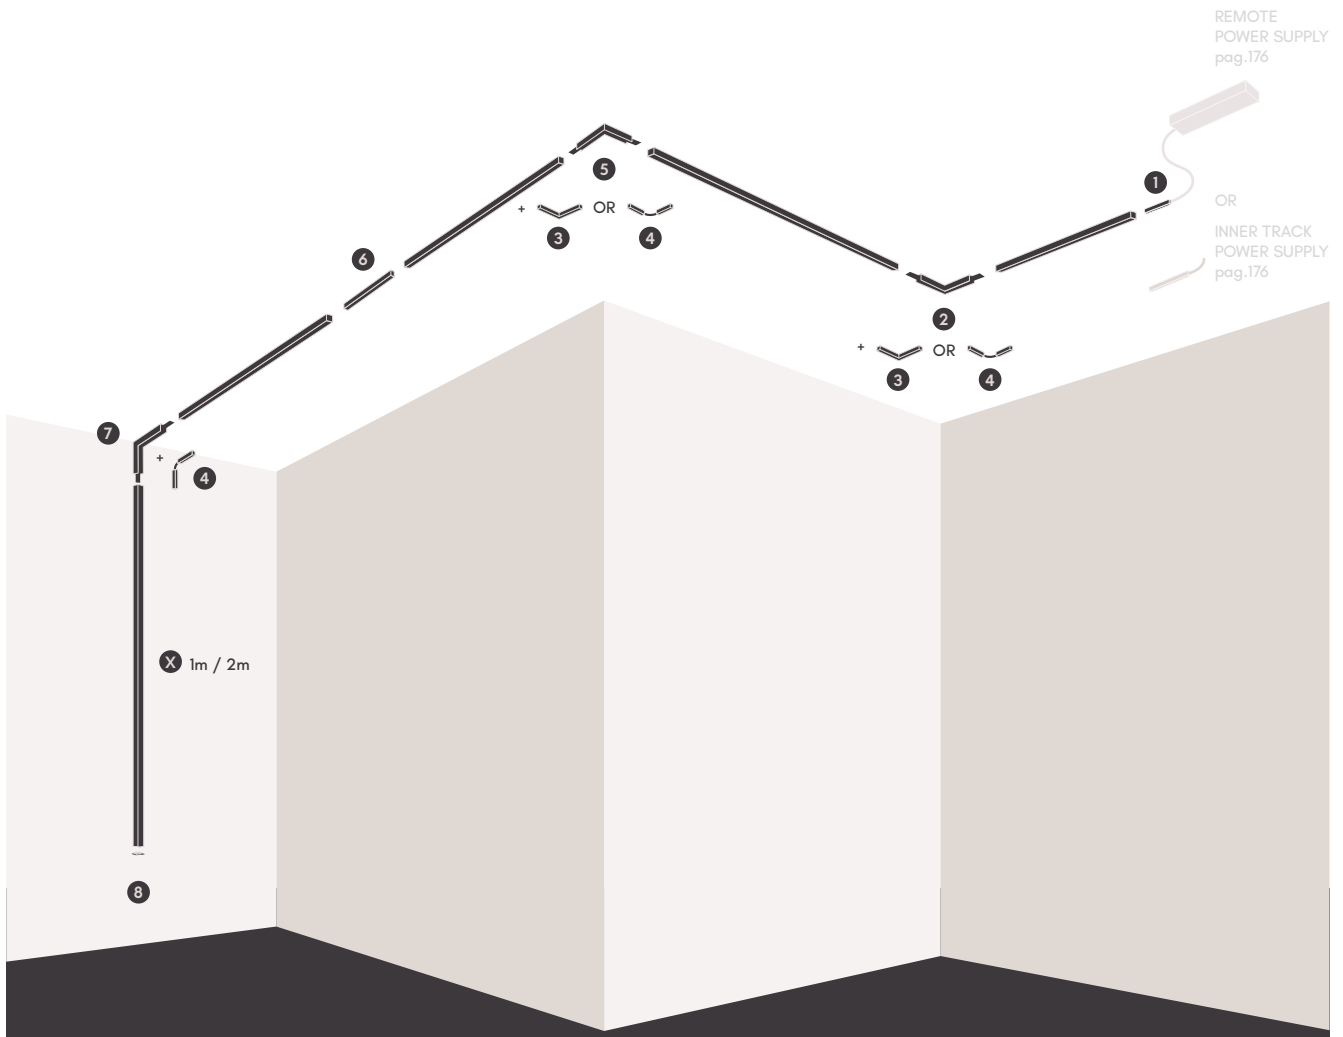


0 Cover track




1 Right power connector
Left power connector




2 5 Right L joint | Left L joint




3 Electrical connector L




4 Flexible electrical connector




6 Intermedium electrical connector



7 L joint wall-ceiling



8 End cap



9 3m. suspension kit



assen.

surface deep track 48V



- 1.5600.8204 1m surface deep track
- 1.5600.8205 2m surface deep track


Cover track included

ACCESSORIES

- 1.5600.8231 Right power connector * 1
- 1.5600.8230 Left power connector * 1
- 1.5600.8217 Right L joint 2
- 1.5600.8234 Electrical connector L ** 3
- 1.5600.8235 Flexible electrical connector 4
- 1.5600.8216 Left L joint 5
- 1.5600.8232 Intermedium electrical connector 6
- 1.5600.8218 L joint wall-ceiling 7
- 1.5600.8220 End cap 8
- 1.5600.8001 3m. suspension kit 9

* Cable not included

** Recommended for suspended applications
(Not suitable for L joints wall-ceiling)

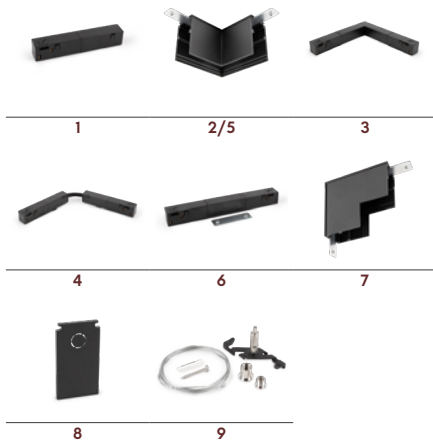


INNER TRACK POWER SUPPLY ON-OFF & DALI

	W	Vac	V
1.5600.8002	100	220-240	48
1.5600.8003	250	220-240	48

30cm cable included

REMOTE POWER SUPPLY ON-OFF


	W	Vac	V
4.2014.1101	150	120-240	48
4.2034.1102	150	220-240	48
4.2034.1101	240	220-240	48

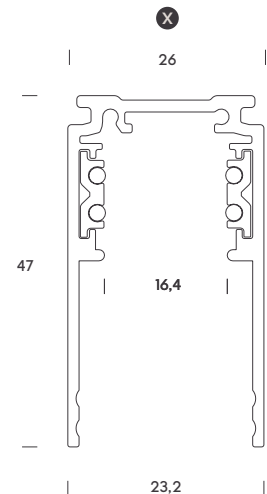


Scale 1:1

Your own configuration


Track shown with power feed from right

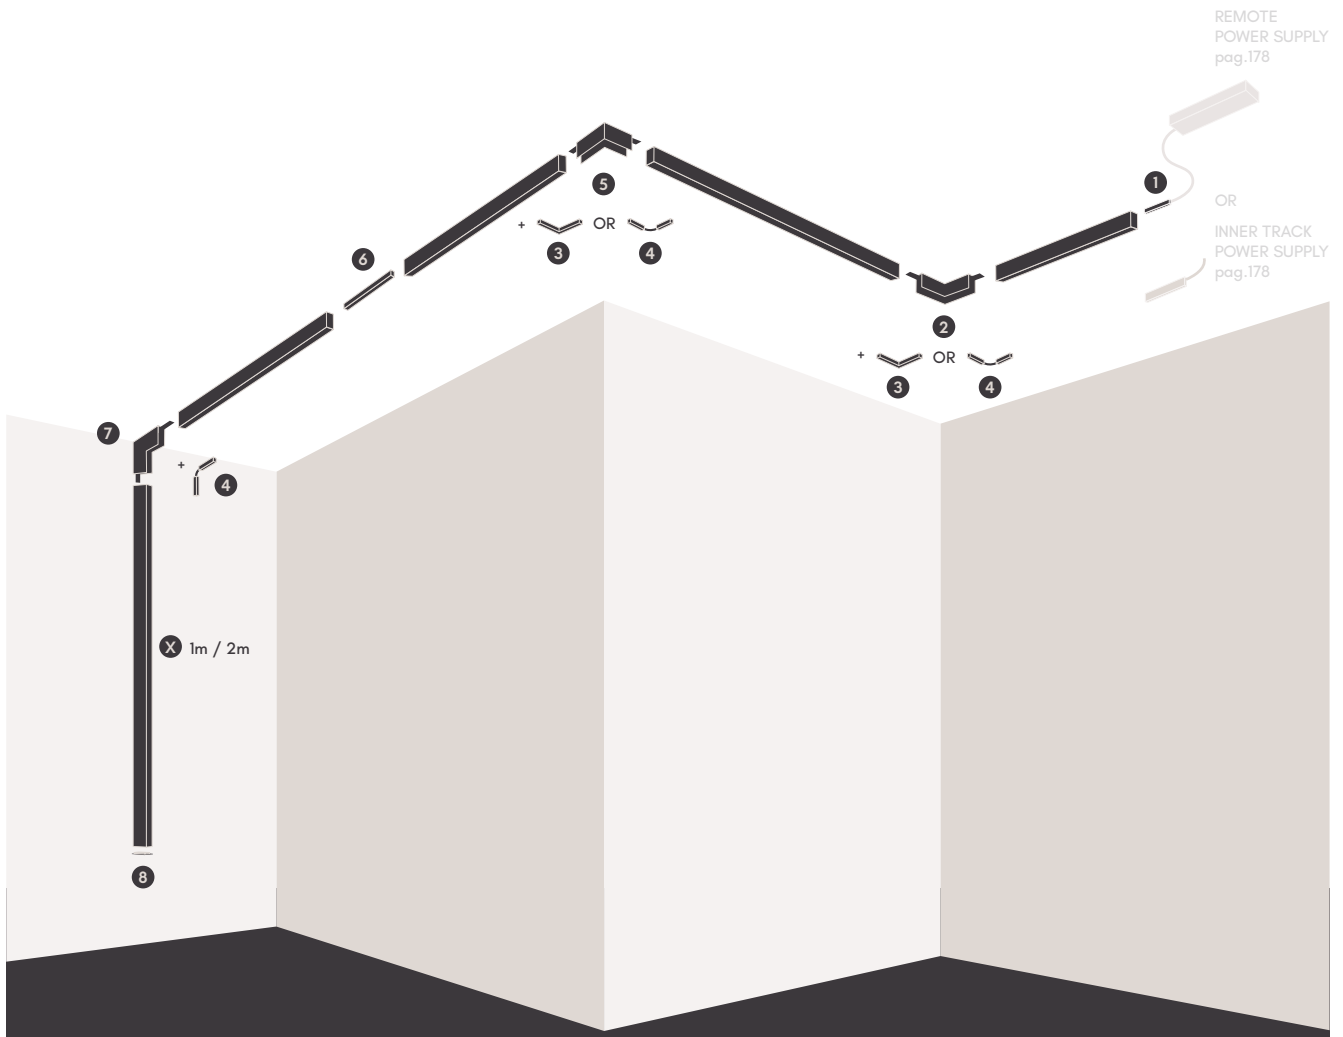


1 Right power connector
Left power connector




2 5 Right L joint | Left L joint




3 Electrical connector L




4 Flexible electrical connector




6 Intermedium electrical connector



7 L joint wall-ceiling



8 End cap



9 3m. suspension kit



assen.

recessed trimless track 48V






- 1.5600.8207 1m trimless track
- 1.5600.8208 2m trimless track

Cover track included

ACCESSORIES

- 1.5600.8231 Right power connector * 1
- 1.5600.8230 Left power connector * 1
- 1.5600.8222 Right L joint 2
- 1.5600.8234 Electrical connector L ** 3
- 1.5600.8235 Flexible electrical connector 4
- 1.5600.8221 Left L joint 5
- 1.5600.8233 Recessed intermedium elec. connector 6
- 1.5600.8223 L joint wall-ceiling 7
- 1.5600.8225 End cap 8

* Cable not included
 ** Recommended for suspended applications
 (Not suitable for L joints wall-ceiling)

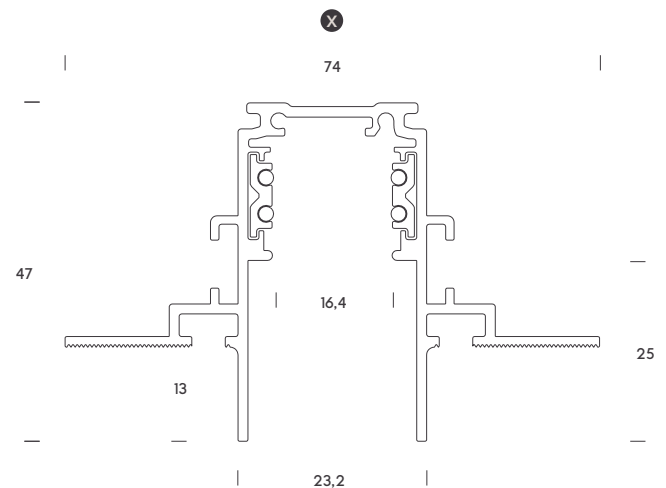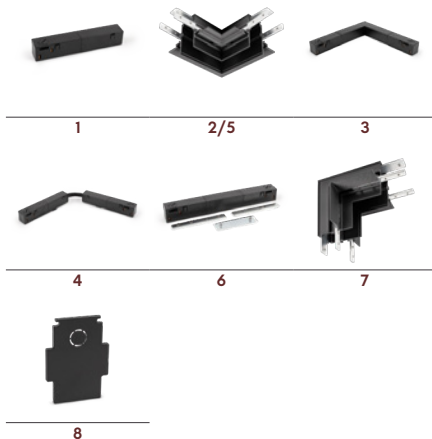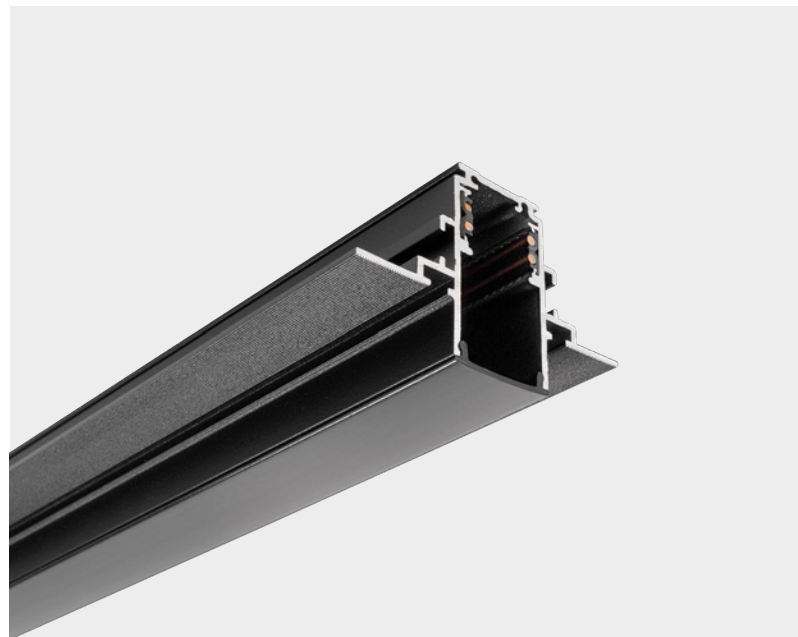

INNER TRACK POWER SUPPLY ON-OFF & DALI

	W	Vac	V
1.5600.8002	100	220-240	48
1.5600.8003	250	220-240	48

30cm cable included


REMOTE POWER SUPPLY ON-OFF

	W	Vac	V
4.2014.1101	150	120-240	48
4.2034.1102	150	220-240	48
4.2034.1101	240	220-240	48


Scale 1:1

Your own configuration


Track shown with power feed from right

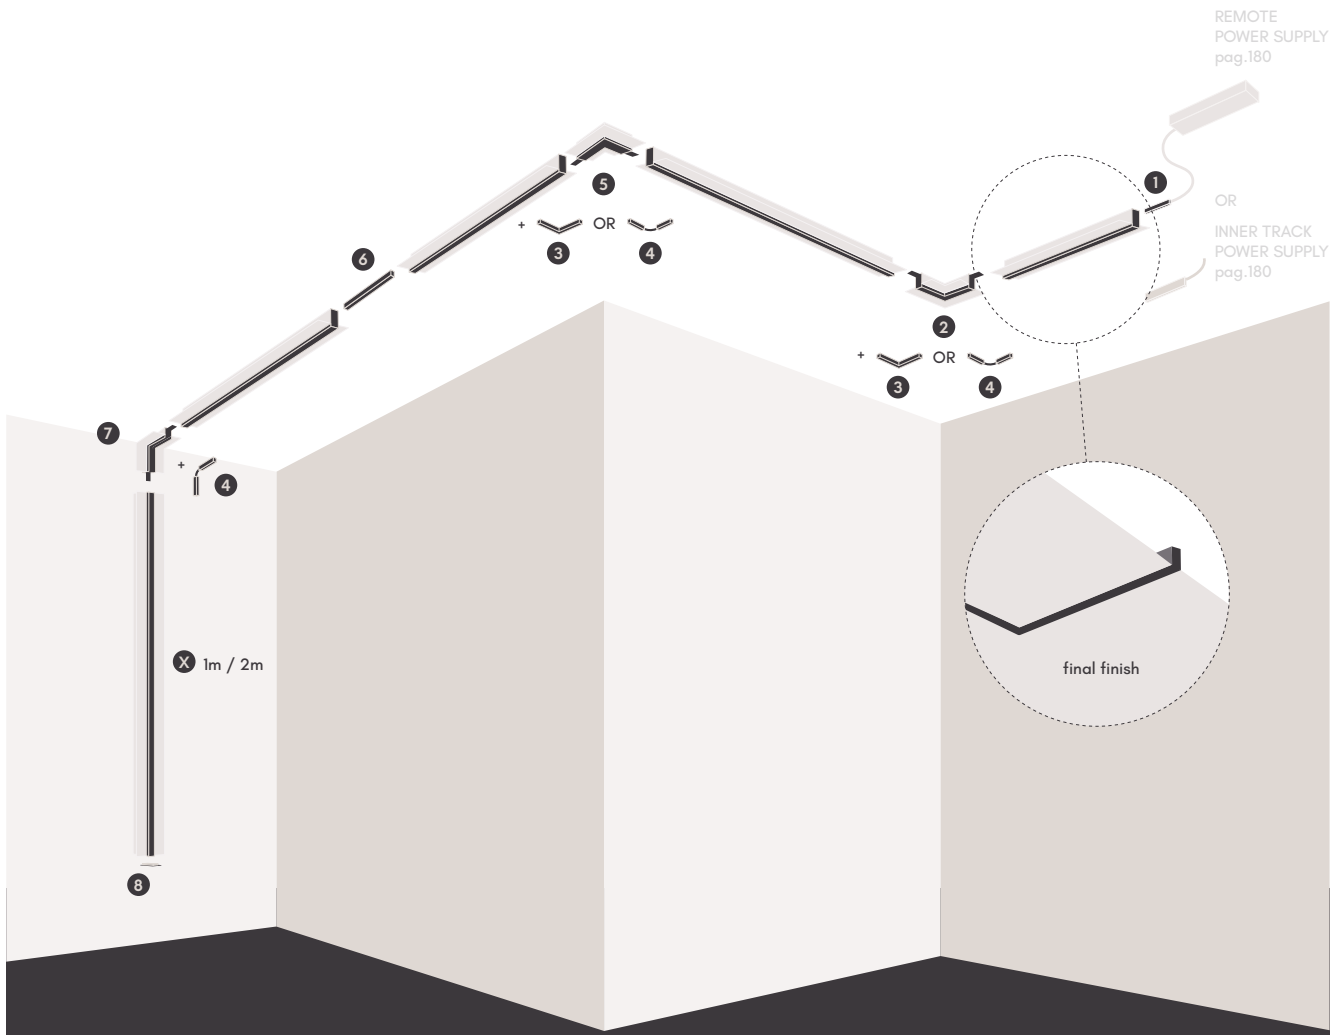


1 Right power connector
Left power connector




2 5 Right L joint | Left L joint




3 Electrical connector L




4 Flexible electrical connector




6 Recessed intermedium elec. connector



7 L joint wall-ceiling



8 End cap



track lights

panels & industrial

table

ceiling

wall

floor



panels &
industrial

LED panels	canada.	185
industrial	finland.	187
	poland.	189



canada.

gen2

A lighting panel designed to enhance workspaces. With CCT Switch system (3000K, 3500K and 4000K), it adapts to every need. Its 60x60 cm format and quick-install system make it a practical, flexible, and efficient solution for modern offices.



	W	mA	K (3CCT)	Real lm (3K-3K5-4K)	▲
1.6004.0118	40	1000	3K-3K5-4K	3830-4160-3970	85°

DRIVERS ON-OFF

	W	mA	V
4.1035.1102	33-40	1000	220-240

DRIVERS DALI & PUSH

	W	mA	V
4.1069.6102	8-42	150-1050	220-240
4.3069.6101	EU	3-38	300-1050

KIT EMERGENCY IH


	V	V
4.9231.0101	9-58	220-240

ACCESSORIES

- 1.6004.8101 Surface frame (600x600x70mm) 1
- 1.6004.8001 4 ressorts kit 2
- 1.6004.8002 4 suspension kit 1,5m. 3




1 2 3

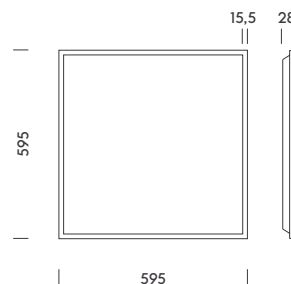



finland.

Created for industrial environments, Finland is a family of watertight luminaires available in 20, 40 and 50W. With 4000K color temperature and IP65 protection, it ensures reliability and safety. Its design allows series connection, simplifying continuous and efficient installations in large spaces.



	W	K	Real lm	▲	V
finland 20					
● 1.6101.1414	20	4000	2040	120°	220-240
finland 40					
● 1.6102.1414	40	4000	4070	120°	220-240
finland 50					
● 1.6103.1414	50	4000	5000	120°	220-240

Maximum serial connections:
 finland 20 = 60 luminaires
 finland 40 = 35 luminaires
 finland 50 = 25 luminaires



panels & industrial

table

ceiling

wall

floor



| 80 | 580-1180-1480 |
 finland 20 . 40 . 50



poland.

gen3

Poland is a robust solution for industrial projects that demand power and flexibility. Its Triple CCT Switch offers three wattages (100/125/150W) and color temperatures (3500K/4000K/5000K). With a 60°, 90° and 110° beam and CRI ≥ 80, it delivers wide, quality light, while IP65 protection ensures lasting performance.



	W (multi)	K (3CCT)	Real lm (3K5-4K-5K)	▲	V
● 1.6153.2218	100 125 150	3K5-4K-5K	15370-16220-15820 18250-19530-18800 22360-23880-22560	60°-90°-110°	120-277

ACCESSORIES

- 1.6153.8204 Aluminum reflector 1
- 1.6153.8202 Wire guard 2
- 1.6153.8201 Yoke surface bracket 3
- 1.6151.8003 Safety sling 4
- 1.6153.8010 Microwave sensor 5
- 1.6153.8011 Bluetooth sensor 6




panels & industrial

table

ceiling

wall

floor

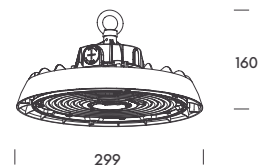

A modern outdoor patio at dusk. The scene is illuminated by warm, low-key lighting, including vertical light tubes and a small table lamp. The patio features a stone-tiled floor, contemporary metal chairs with cushions, and a small table. The background shows a building with large glass windows and a wall, with trees and a clear sky visible in the distance.

outdoor collection

The HOFF LIGHT Outdoor collection is rooted in the expertise inherited from MCI LIGHT, consolidating years of know-how in exterior luminaires within the GRUPO MCI. These solutions combine design, functionality and respect for the environment, offering luminaires that enhance outdoor spaces, from terraces and gardens to coastal or irrigation projects. Each piece reflects our commitment to light that is approachable, practical and responsible.

2200K color temperature:

warm light that reduces light pollution and respects the natural environment.

CCT Switch:

easily change the color temperature directly from the luminaire body.

High-quality materials:

durable, resistant, and designed for outdoor use.

Sea Side:

products specifically designed for coastal or irrigation zones, combining functionality and durability.

Colour range:

- White
- Black
- Anthracite
- Grey
- Corten

progressively expanding the families in this last finish.

La colección Outdoor de HOFF LIGHT nace de nuestra experiencia heredada de MCI LIGHT, consolidando años de know-how en luminarias exteriores dentro del GRUPO MCI. Estas soluciones combinan diseño, funcionalidad y respeto por el entorno, ofreciendo luminarias que acompañan y realzan los espacios exteriores, desde terrazas y jardines hasta proyectos costeros o de riego. Cada pieza refleja nuestra apuesta por la luz cercana, práctica y responsable.

La collection Outdoor de HOFF LIGHT repose sur l'expertise héritée de MCI LIGHT, consolidant des années de savoir-faire en luminaires d'extérieur au sein du GRUPO MCI. Ces solutions combinent design, fonctionnalité et respect de l'environnement, offrant des luminaires qui valorisent les espaces extérieurs, des terrasses et jardins aux projets côtiers ou d'irrigation. Chaque pièce reflète notre engagement pour une lumière proche, pratique et responsable.



table

portable lamps

split.

195

malmö.

197

sweden.

199

table

ceiling

wall

floor



split.

portable lamp

Split captivates with its slim, lightweight design and portable character, offering an enveloping lighting effect that enhances each space while staying below the visual field to create intimate, welcoming atmospheres without imposing. With up to 29h autonomy, 3h fast charging and an optional multi-charger, it's perfect for hospitality projects.



	W	K (2CCT)	Real lm (2K2-2K7)	▲	V
● 2.9007.1118	1,5	2K2-2K7	95-105	130°	3,7 DC
● 2.9007.1318	1,5	2K2-2K7	95-105	130°	3,7 DC
● 2.9007.1618	1,5	2K2-2K7	95-105	130°	3,7 DC

25% of light - 29 hours runtime
 50% of light - 15 hours runtime
 75% of light - 10 hours runtime
 100% of light - 7 hours runtime
 Charge time 3 hours

ACCESSORIES

- 2.9007.8200 100-240V Multi-charger for 6 luminaires 1



1



tables



ceiling

wall


floor



malmö.

portable lamp

Defined by serene and essential geometry, Malmö treats light as a subtle gesture. Its hemispherical shade hovers above a slender body, shaping a harmonious and minimalist silhouette. Available in two sizes and with tunable white control, it offers versatility without losing its quiet character. With an IP65 rating and aluminium body, it's a durable companion for both indoor and outdoor use.





	W	K (2CCT)	Real lm (2K7-4K)	▲	V
malmö S					
● 2.9005.1118	3,5	2K7-4K	200	100°	5 DC
malmö M					
● 2.9006.1118	3,5	2K7-4K	200	100°	5 DC

25% of light - 28 hours runtime
 50% of light - 14 hours runtime
 75% of light - 10 hours runtime
 100% of light - 9 hours runtime
 Charge time 6 hours



table

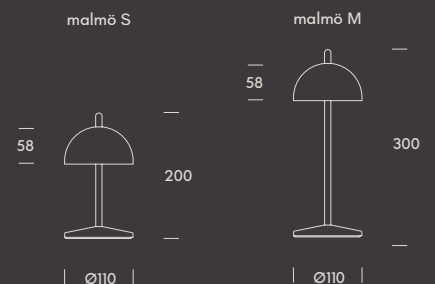

ceiling

wall

floor



sweden.

portable lamp

With a clean silhouette and a faceted shade that recalls classic design, Sweden gives a contemporary twist to a recognizable typology. Its warm downward light creates intimate atmospheres in hospitality spaces. Available in two sizes and finishes, with an aluminum body, IP65 rating, and dimming between 2700K and 3000K, it combines functionality and elegance for both indoor and outdoor use.



IP 65

IK 06

CRI >80



DIMMING

50.000H LIFE

AL BODY

PC PRISMATIC DIFFUSER



BATTERY 8 HRS



ADAPTER INCL

CB

RETILAP

	W	K (2CCT)	Real lm (2K7-3K)	▲	V
● 2.9003.1118	2,2	2K7-3K	155	100°	5 DC
● 2.9003.1318	2,2	2K7-3K	155	100°	5 DC

25% of light - 27 hours runtime
 50% of light - 13 hours runtime
 75% of light - 9 hours runtime
 100% of light - 8 hours runtime
 Charge time 6 hours

ACCESSORIES


- 2.9007.8200 100-240V Multi-charger for 6 luminaires 1



1



table



ceiling

wall

floor



ceiling

recessed downlights	graz.	203
	romania.	205
surface fixtures	denmark.	207
	lithuania.	209
	helsinki.	211



graz.

mini downlight

Graz combines compact dimensions with a textured finish that blends naturally into any outdoor architectural space. Its recessed optics ensure high visual comfort (UGR<17), avoiding glare and creating a balanced lighting effect. With IP65 protection, it is a piece that unites design, discretion, and durability.



	W	mA	K	Real lm	▲
● 2.1010.0111	7	350	2700	460	24°
● 2.1010.0112	7	350	3000	480	24°
● 2.1010.0211	7	350	2700	460	24°
● 2.1010.0212	7	350	3000	480	24°

DRIVERS ON-OFF

	W	mA	V	IP
4.3041.1102	EU	6-8	350	100-240 20
4.3041.1201	EU	1-8	350	100-240 54

DRIVERS DALI & PUSH

	W	mA	V	IP
4.1069.6104	0,2-15	100-700	200-240	20
* 4.3069.1101	EU	3-22	125-500	200-240 20


* Instalación driver en techo registrable.
Driver installation in accessible ceiling.
Installation du driver dans un plafond accessible.

ACCESSORIES


- 2.1010.8001 Honeycomb 1



1

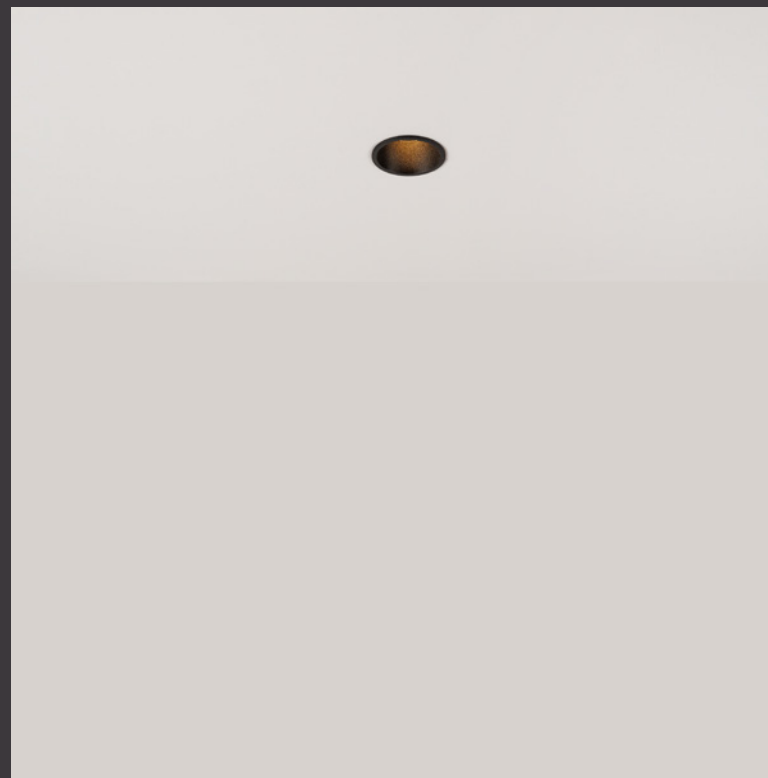

CUT OUT Ø45 mm
MIN. HEIGHT 95 mm




Ø50

84

ceiling

wall

floor

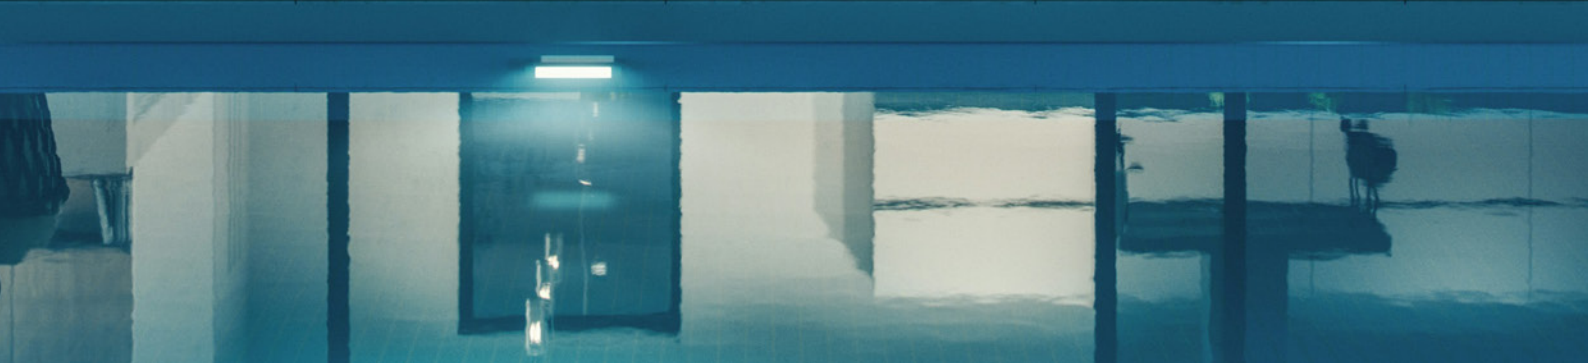

romania.

Robust and efficient, Romania is an outdoor downlight available in two sizes and wattages. Its aluminum body with IP65 protection ensures durability in demanding conditions, while the 60° beam delivers wide and uniform light, adapting to a variety of applications.



	W	mA	K	Real lm	▲
romania 20					
● 2.1001.0112	20	500	3000	1620	60°
● 2.1001.0114	20	500	4000	1700	60°
romania 30					
● 2.1002.0112	30	700	3000	2400	60°
● 2.1002.0114	30	700	4000	2550	60°

DRIVERS ON-OFF


	W	mA	V
romania 20			
4.1069.1101	21	150-500	200-240
4.3062.1101	EU	2,5-22	500

romania 30

4.3069.1102	EU	15-32	350-725	220-240
-------------	----	-------	---------	---------

DRIVERS DALI & PUSH

	W	mA	V	
romania 20 . 30				
4.1069.6103	7-29	150-700	220-240	
4.3069.6101	EU	3-38	300-1050	220-240

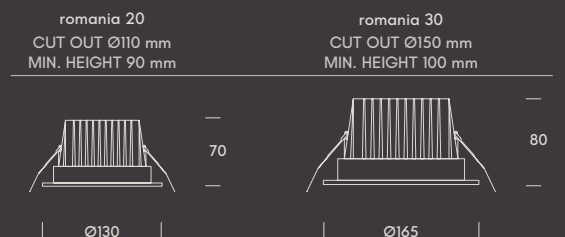



denmark.

Denmark is a family of wall lights designed for outdoor projects where power and discretion must coexist. Its minimalist design, available in round or square versions and in white or anthracite finishes, adapts easily to different architectural styles. Featuring a COB LED, it delivers a warm and uniform 55° beam, protected by IP54 and IK08 ratings. A robust yet elegant solution that brings clarity, safety and comfort to outdoor spaces.



IP 54

IK 08

CRI >80



DRIVER INCL

PF >0,5

50.000H LIFE

FLICKER FREE

AL BODY

GLASS DIFFUSER



RETILAP

	W	K	Real lm	▲	V
denmark 6 round					
● 2.2021.1112	6	3000	300	55°	100-240
● 2.2021.1312	6	3000	300	55°	100-240
denmark 6 square					
● 2.2022.1112	6	3000	300	55°	100-240
● 2.2022.1312	6	3000	300	55°	100-240



denmark round



105

Ø80

denmark square



105

Ø80

ceiling

wall

floor



lithuania.

gen2

A minimalist surface-mounted piece for ceiling or wall, offering a uniform and versatile light. Its dual switch allows easy adjustment of power and color temperature to meet the needs of each project. Perfect for canopies, parking areas, or technical spaces that require efficiency, durability, and clean design.



IP 65

IK 08

CRI >85



DRIVER INCL

PF >0,9

50.000H LIFE

FLICKER FREE

AL BODY

PC OPAL DIFFUSER



RETILAP

	W (multi)	K (3CCT)	Real lm (2K7-3K2-4K)	▲	V
● 2.2050.1118	13 18	2K7-3K2-4K	1220-1305-1395 1690-1810-1905	120°	100-240
● 2.2050.1318	13 18	2K7-3K2-4K	1220-1305-1395 1690-1810-1905	120°	100-240



ceiling

wall

floor



Ø300

54



helsinki.

Helsinki is a family of outdoor wall lights that combines durability and sobriety without compromising on design. Its cylindrical aluminium body, with a clean finish and no visible screws, creates a timeless look. Available in white or anthracite with IP65 and IK07 protection, it ensures resistance to water and impact. With just 68 mm in diameter and GU10 compatibility, it integrates seamlessly into any project.



IP
65

IK
07

AL
BODY

GLASS
DIFFUSER

CB



RETILAP

	W	Holder	V
● 2.2033.1190	Max. 10	GU10 LED	100-240
● 2.2033.1390	Max. 10	GU10 LED	100-240

Lámpara GU10 no incluida.
GU10 bulb not included.
Lampe GU10 non incluse.

ACCESSORIES

● 2.2033.8001	Honeycomb
---------------	-----------



ceiling

wall

floor



wall

wall lights	glasgow.	215
	scotland.	219
	guinea.	221
	benin.	223
	dubai.	225
	zambia.	227
	ghana.	229
	costa rica.	231
	oslo.	233
	palma.	235
	chile.	237
	bilbao.	239
	panama.	241
	kyoto.	243
jamaica.	245	
russia.	247	
spotlights	cuba base.	249
	ecuador.	251
floor washers	uruguay.	253
	estepona.	255
	bergen.	257
	athens round.	259
	athens square.	259
	athens rectangular.	259



glasgow.

Glasgow plays with light and glass to reshape the atmosphere. Its solid glass shade, available in three textures and finishes, casts a soft, enveloping glow. A decorative piece in its own right, it pairs with interchangeable ring colours and 3CCT technology to shape the mood freely. A design that adds character to any space.



wall

floor

glasgow.

Glasgow plays with light and glass to reshape the atmosphere. Its solid glass shade, available in three textures and finishes, casts a soft, enveloping glow. A decorative piece in its own right, it pairs with interchangeable ring colours and 3CCT technology to shape the mood freely. A design that adds character to any space.


 IP 65 IK 07 CRI >90 DRIVER INCL TRIAC PF >0,9 50.000H LIFE FLICKER FREE PC BODY GLASS DIFFUSER **CB** RETILAP

	W	K (3CCT)	Real lm (2K2-2K7-3K)	▲	V
● 2.3006.1218	6	2K2-2K7-3K	400-420-450	125°	200-240

Necesita un cristal.
Needs a glass.
Un verre est nécessaire.



ACCESSORIES

glass

- 2.3006.8001 Clear wave 1
- 2.3006.8002 Clear convex 2
- 2.3006.8003 Clear diamant 3
- 2.3006.8004 Smoked wave 4
- 2.3006.8005 Smoked convex 5
- 2.3006.8006 Smoked diamant 6
- 2.3006.8007 Amber wave 7
- 2.3006.8008 Amber convex 8
- 2.3006.8009 Amber diamant 9

rings

- 2.3006.8010 White 10
- 2.3006.8011 Black 11
- 2.3006.8012 Gold 12
- 2.3006.8013 Nickel 13
- 2.3006.8014 Bronze 14

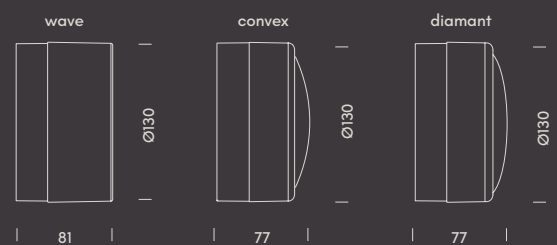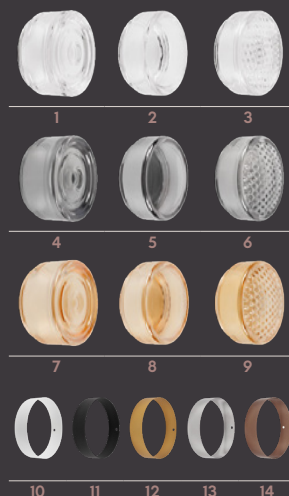

Your own configuration


1. Add the fixture reference



2. Select glass (obligatory)




3. Add the decorative ring (optional)








wall

floor

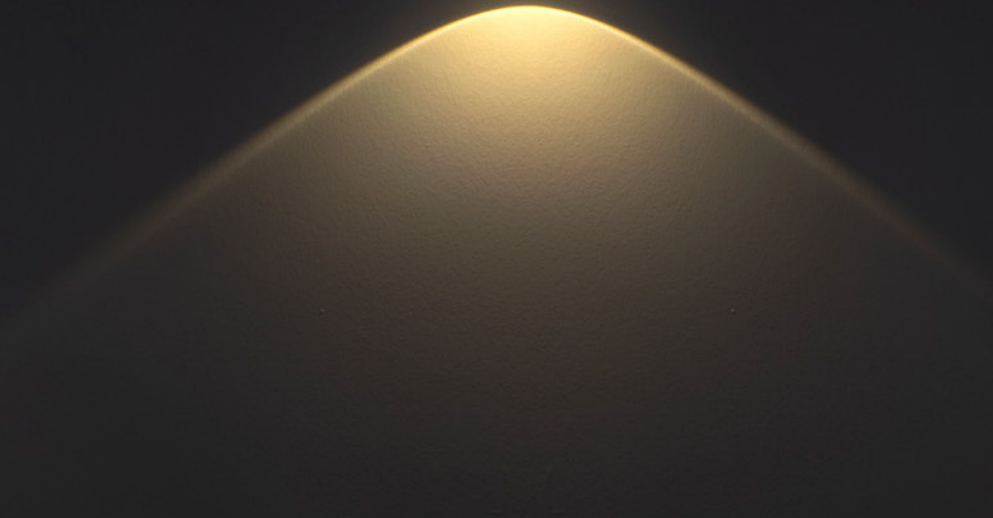

scotland.

Scotland is an outdoor wall light with soft lines and an aluminum body that conveys both elegance and strength. Its lens creates a parabolic effect that enhances the beam and distributes it evenly across the surface, bringing character to facades and walls. With IP65 and IK08 protection, it ensures durability.”

 IP 65
  IK 08
  CRI >80
  DRIVER INCL
  PF >0.5
  50,000H LIFE
  AL BODY
  GLASS LENS
  CB RETILAP

	W	K	Real lm	▲	V
● 2.3005.1112	6	3000	320	100°	100-240
● 2.3005.1312	6	3000	320	100°	100-240



wall

floor



guinea.

up . down

With a cylindrical design and a flat back for easy wall mounting, Guinea adds character to any exterior. Its front, gently curved at the top and bottom, casts an elegant up&down effect with warm, even light. Made of aluminum with IP65 protection and COB LED technology, it is available in white or anthracite, combining simplicity, effectiveness, and style.



IP
65

IK
08

CRI
>80



DRIVER
INCL

PF
>0,9

50.000H
LIFE


AL
BODY

GLASS
DIFFUSER

CB

RETILAP

	W	K	Real lm	▲	V
● 2.3075.1112	2x10	3000	1300	80° . 80°	220-240
● 2.3075.1312	2x10	3000	1300	80° . 80°	220-240

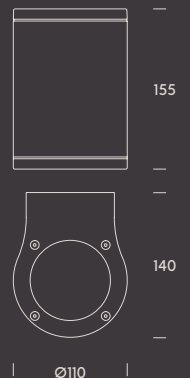

wall

floor



benin.

Benin is a robust cylindrical wall light designed to give visual strength to any space. Available in white or anthracite, it comes in two versions: a standard model and a larger one with an up&-down effect. Its aluminum body and IP54-IK08 protection ensure durability and performance.



IP
54

IK
08

CRI
>80



DRIVER
INCL

PF
>0,5

50.000H
LIFE


AL
BODY

GLASS
DIFFUSER

CB

RETILAP

	W	K	Real lm	▲	V
benin 6					
● 2.3071.1112	6	3000	400	45°	100-240
● 2.3071.1312	6	3000	400	45°	100-240
benin 12 up . down					
● 2.3072.1112	2x6	3000	800	30° . 30°	100-240
● 2.3072.1312	2x6	3000	800	30° . 30°	100-240

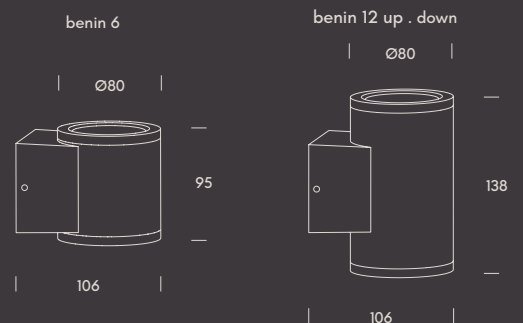



dubai.

Dubai is a family of robust exterior wall lights, available in two sizes (185 and 300 mm) with an up&down effect. Its aluminum body, IP65-IK07 protection, and COB LED technology ensure durability and performance for both residential and contract projects.



IP
65

IK
07

CRI
>80



DRIVER
INCL

PF
>0.9

50.000H
LIFE

AL
BODY

GLASS
DIFFUSER

CB


RETILAP

	W	K	Real lm	▲	V
dubai 20					
● 2.3081.1312	20	3000	1200	18°	220-240
dubai 40 up . down					
● 2.3082.1312	2x20	3000	2400	18° . 18°	220-240



dubai 20

dubai 40 up . down

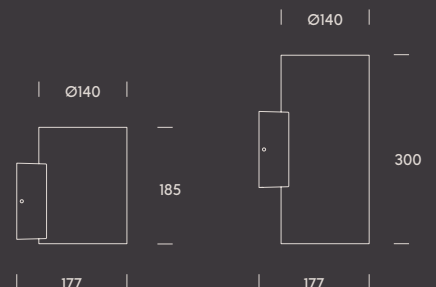



zambia.

up . down

Zambia is a wall light defined by its asymmetrical prism shape, where the slanted top gives it a distinctive architectural presence. Made of aluminum with a glass diffuser and HP LED, it projects a precise up & down effect that highlights walls and entrances with balance and sobriety. With IP54-IK08 protection, it is a reliable solution for both residential and contract projects.



IP
54

IK
08

CRI
>80



DRIVER
INCL

PF
>0,5

50.000H
LIFE


AL
BODY

GLASS
DIFFUSER

CB

RETILAP

	W	K	Real lm	▲	V
● 2.3065.1112	2x3	3000	350	40° . 85°	100-240
● 2.3065.1312	2x3	3000	350	40° . 85°	100-240

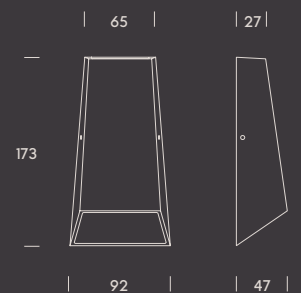



ghana.

Ghana is a compact, geometric wall light that blends design with versatility. Its cubic aluminum body with IP54-IK08 protection frames a defined 35° beam generated by a COB LED, also available in an up & down version. Offered in white or anthracite, Ghana provides a practical and consistent solution for exterior projects that seek uniformity and character.



IP 54

IK 08

CRI >80



DRIVER INCL

PF >0,5

ghana

PF >0,9

ghana

up . down

50.000H LIFE

FLICKER FREE

AL BODY

CB



RETILAP

ghana 6

	W	K	Real lm	▲	V
● 2.3011.1112	6	3000	410	35°	100-240
● 2.3011.1312	6	3000	410	35°	100-240

ghana 12 up . down

● 2.3012.1112	2x6	3000	775	35° . 35°	100-240
● 2.3012.1312	2x6	3000	775	35° . 35°	100-240



100

100

wall

floor



costa rica.

Costa Rica delivers an enveloping light from an inner plane framed by a slim aluminum body that adds presence and solidity. The result is a uniform wall wash that enhances façades and outdoor paths without visual noise. Its design adapts naturally to minimalist, contemporary, or colonial-inspired projects, always supporting architecture through light.



IP 65

IK 06

CRI >80



DRIVER INCL

PF >0,9

50.000H LIFE



SEA SIDE SUITABLE


AL BODY

PC DIFFUSER

CB




RETILAP

	W	K (5CCT)	Real lm (2K2-2K7-3K-3K5-4K)	▲	▼
● 2.3026.1118	12	2K2-2K7-3K-3K5-4K	760-820-835-845-850	180°	100-240
● 2.3026.1318	12	2K2-2K7-3K-3K5-4K	760-820-835-845-850	180°	100-240
● 2.3026.1618	12	2K2-2K7-3K-3K5-4K	760-820-835-845-850	180°	100-240



wall

floor

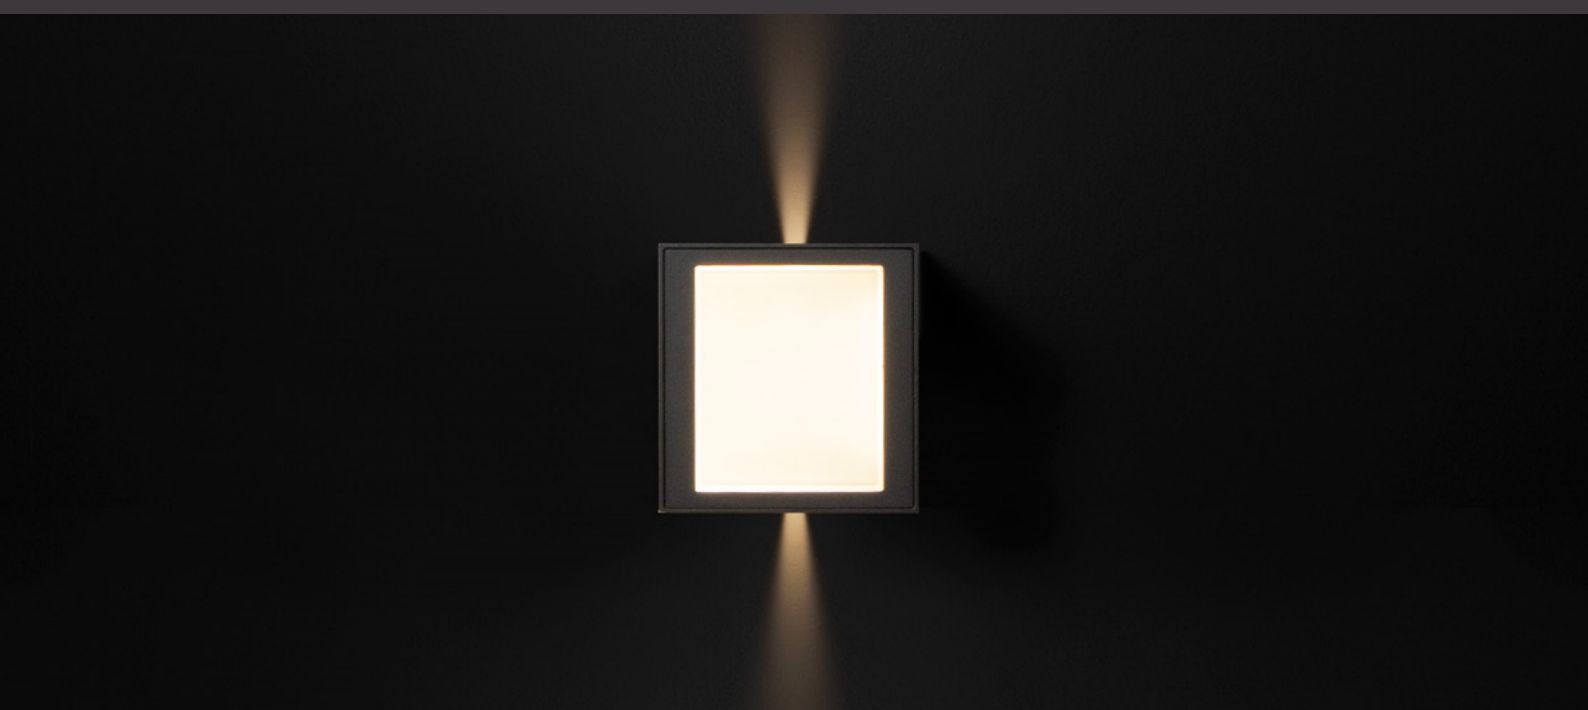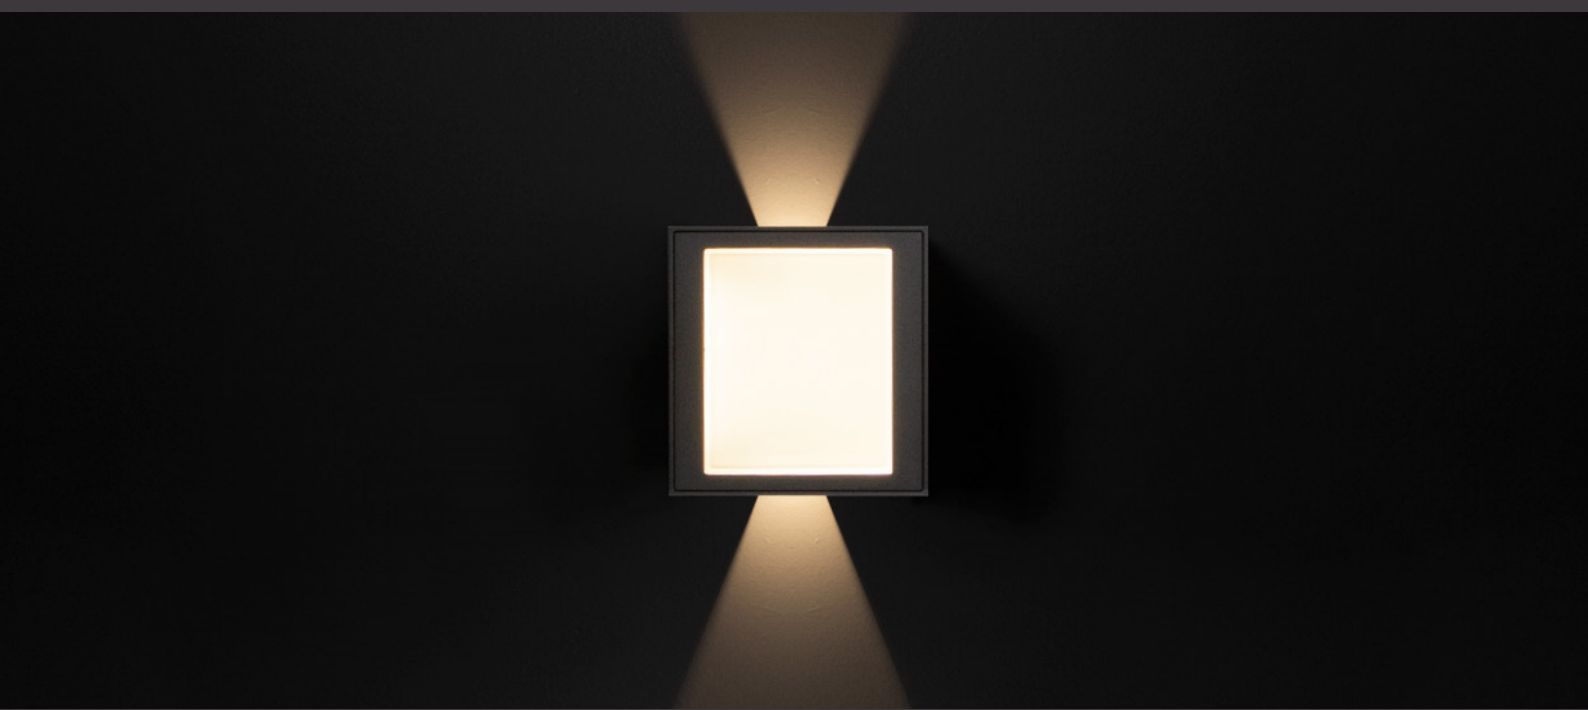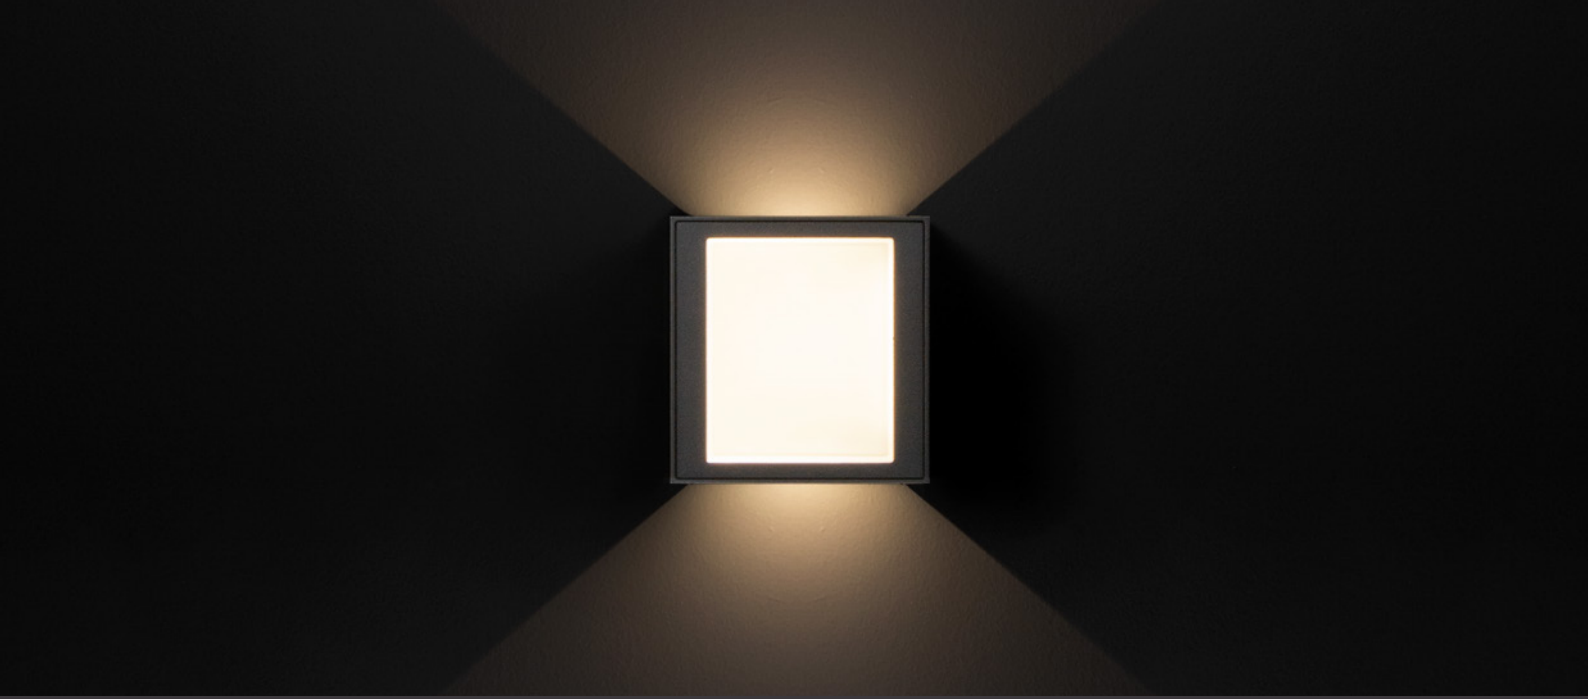

oslo.

up . down

Oslo combines geometry and functionality in an exterior wall light with clean cubic and rectangular lines. Its opal polycarbonate front spreads the LED light evenly, while the fins let you adjust the beam angle from 0-100° to control the up&down effect according to your needs. Made of aluminum with IP54 protection, it's available in white and anthracite, offering versatility, control, and a modern style.



IP 54

IK 06

CRI >80



DRIVER INCL

PF >0,5

50.000H LIFE

AL BODY



PC OPAL DIFFUSER

GLASS CLEAR

CB

RETILAP

	W	K	Real lm	▲ up down	◀	∇
● 2.3025.1112	9	3000	375	0° . 100°	100°	100-240
● 2.3025.1312	9	3000	375	0° . 100°	100°	100-240

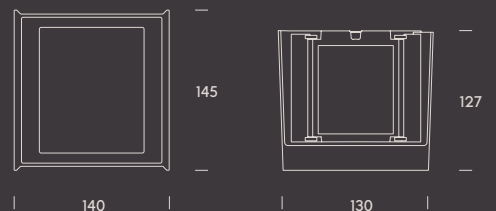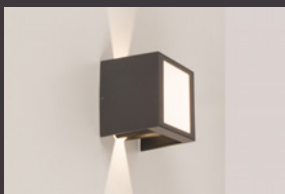



palma.

up . down

The Palma family is defined by its flexibility and adaptability. Available in a cubic version with clean, modern lines or a semicylindrical version with a smooth, organic profile, it lets you adjust the angle from 0-90° and play with the up&down effect to suit your space. With IP65 protection and white or anthracite finishes, Palma combines sobriety with maximum adaptability.



IP
65

CRI
>80



DRIVER
INCL

PF
>0,5

50.000H
LIFE

AL
BODY

GLASS
DIFFUSER




RETILAP


	W	K (3CCT)	Real lm (2K7-3K2-4K)	▲	V
palma square					
●	2.3086.1118	2x5	2K7-3K2-4K	550-580-600	0° . 90° 100-240
●	2.3086.1318	2x5	2K7-3K2-4K	550-580-600	0° . 90° 100-240
●	2.3086.1618	2x5	2K7-3K2-4K	550-580-600	0° . 90° 100-240
palma round					
●	2.3085.1118	2x5	2K7-3K2-4K	550-580-600	0° . 90° 100-240
●	2.3085.1318	2x5	2K7-3K2-4K	550-580-600	0° . 90° 100-240
●	2.3085.1618	2x5	2K7-3K2-4K	550-580-600	0° . 90° 100-240



palma square



palma round

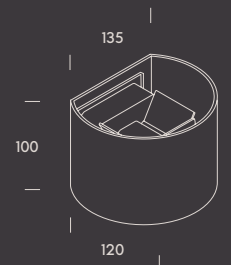

wall

floor



chile.

up . down

Chile features simple lines and a rectangular body, standing out for its sobriety and reliability. Its 110° optic projects a wide, uniform beam that subtly highlights façades and walls, adapting effortlessly to different architectural styles.



IP
54

IK
08

CRI
>80



DRIVER
INCL

PF
>0,5

PF
>0,9

50.000H
LIFE

AL
BODY

GLASS
DIFFUSER



RETILAP

chile 6 chile 12

	W	K	Real lm	▲	V
chile 6					
● 2.3031.1112	2x3	3000	550	110° . 110°	100-240
● 2.3031.1312	2x3	3000	550	110° . 110°	100-240
chile 12 up . down					
● 2.3032.1112	2x6	3000	1075	110° . 110°	100-240
● 2.3032.1312	2x6	3000	1075	110° . 110°	100-240





bilbao.

up . down

Bilbao is defined by a balanced geometry that engages with architecture through light. From a single fixture, you decide its expression: upward, downward, or both, creating a comfortable and even wall wash. Designed to enhance façades with character, it combines visual control with a finish engineered to withstand demanding outdoor conditions, even in coastal environments, with >1000h SST (Salt Spray Test).



IP
65

IK
06

CRI
>80



DRIVER
INCL

PF
>0,9

50.000H
LIFE



SEA SIDE
SUITABLE



AL
BODY

PC
DIFFUSER

CB

RETILAP

	W	K (3CCT)	Real lm (2K7-3K2-4K)	▲	V
● 2.3042.1118	10	2K7-3K2-4K	610-640-710	110° . 110°	220-240
● 2.3042.1318	10	2K7-3K2-4K	610-640-710	110° . 110°	220-240

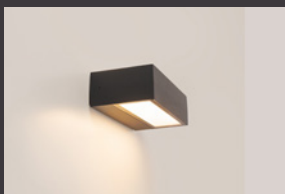




panama.


up . down



Panama combines soft lines and balanced proportions in a wall light just 28 mm thick. With an aluminum body and rounded ends, it projects a 110° up&down effect that brings elegance and uniformity to walls and entrances. Available in two sizes (115 and 175 mm) and in white or anthracite finishes.


 IP 54 IK 08 CRI >80 DRIVER INCL PF >0,5 PF >0,9 50.000H LIFE AL BODY PC DIFFUSER **CB** RETILAP

panama 8 panama 13

	W	K	Real lm	▲	V
panama 8					
● 2.3051.1112	2x4	3000	660	110° . 110°	100-240
● 2.3051.1312	2x4	3000	660	110° . 110°	100-240
panama 13					
● 2.3052.1112	2x6,5	3000	950	110° . 110°	100-240
● 2.3052.1312	2x6,5	3000	950	110° . 110°	100-240

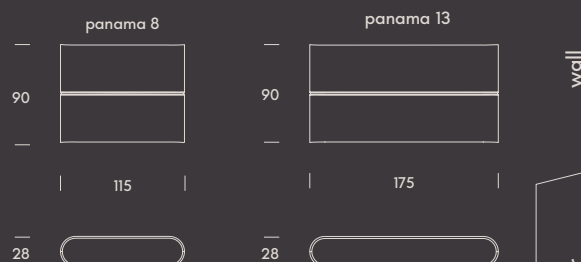

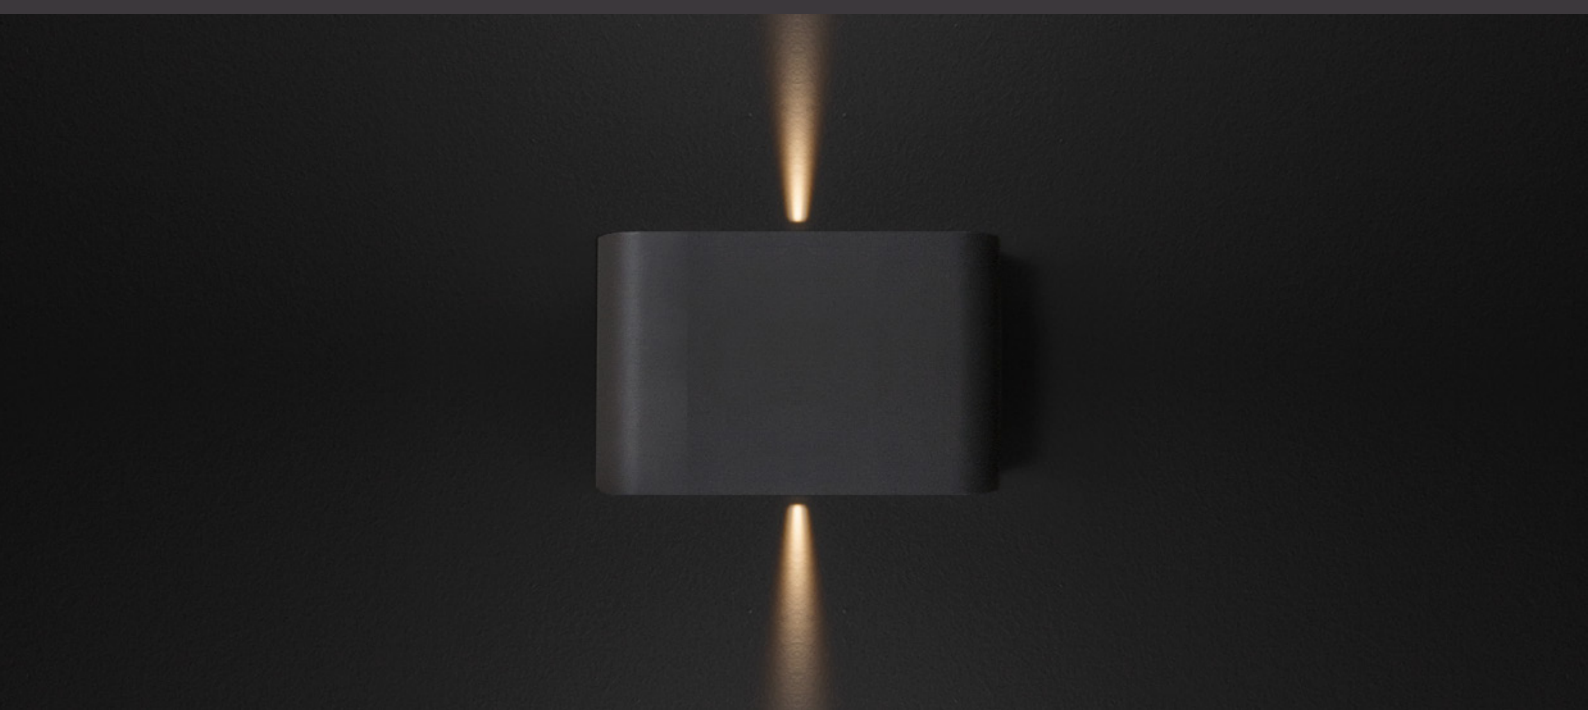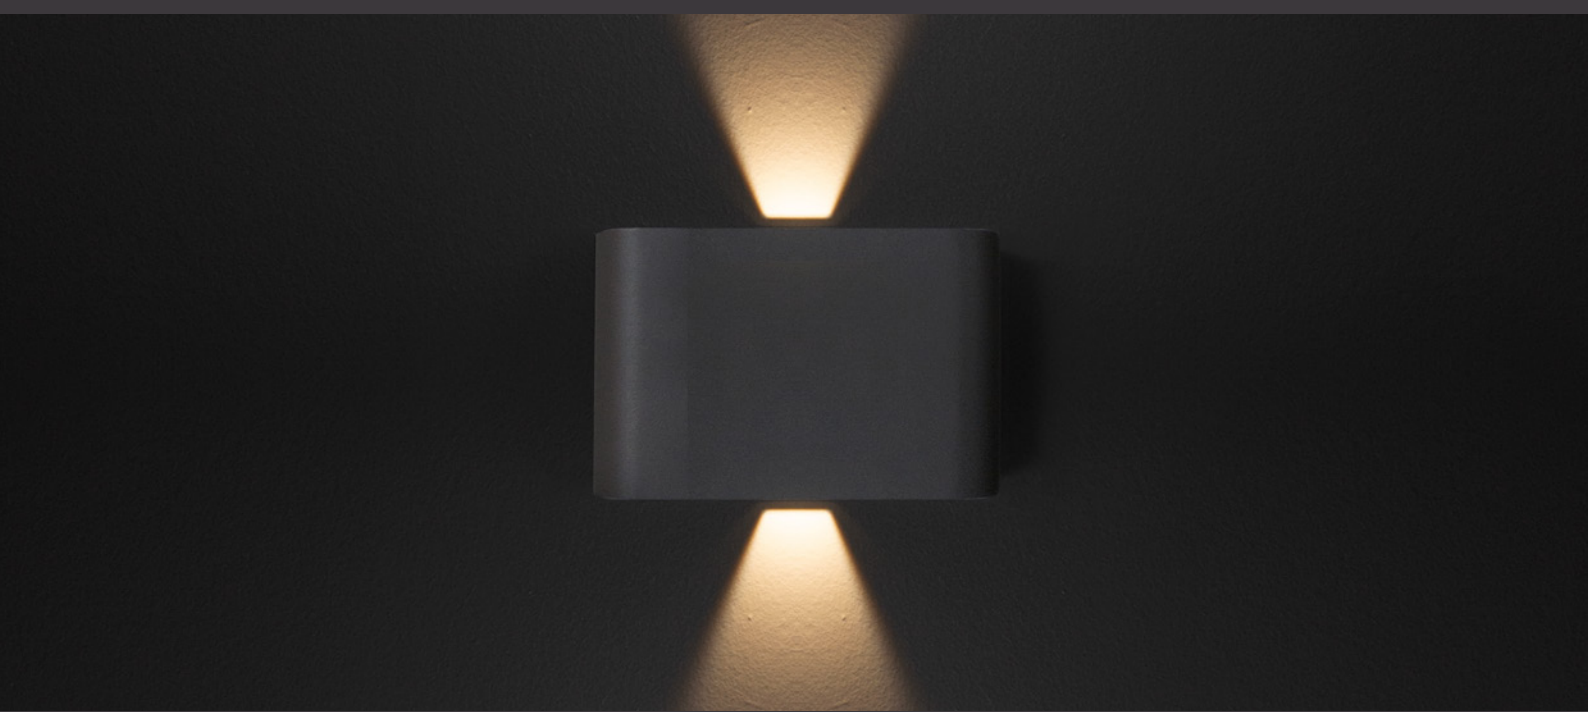

kyoto.

up . down

Kyoto is a sober and elegant wall light with an aluminum body and up&down effect. Equipped with 3000K COB LEDs, IP65-IK06 protection, and available in white or anthracite, it provides warm, precise light that subtly enhances the architecture.



IP
65

IK
06

CRI
>80



DRIVER
INCL

PF
>0.5

50.000H
LIFE


AL
BODY

GLASS
DIFFUSER

CB

RETILAP

	W	K	Real lm	▲	V
● 2.3055.1112	2x6	3000	415	0° . 100°	100-240
● 2.3055.1312	2x6	3000	415	0° . 100°	100-240

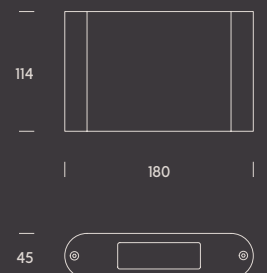



jamaica.

Jamaica combines geometric design with functionality. Its inclined plane directs the light gently toward the ground, illuminating paths and entrances with a modern yet discreet character. Made of aluminum with IP65 protection, it features SMD LEDs and CCT Switch (3000K/4000K) to adapt to every project.



IP
65

IK
08

CRI
>80



DRIVER
INCL

PF
>0,9

50.000H
LIFE

AL
BODY

PC
DIFFUSER

CB

RETILAP




2.3100.1318

W	K (2CCT)	Real lm (3K-4K)	▲	▼
13,5	3K-4K	1000-1050	120°	100-240



Related products

jamaica bollard
page 309



outdoor collection - HOFF LIGHT

245

wall

floor



russia.

Russia is our GU10 wall light family, bringing character and versatility to exterior lighting. Available in cylindrical or cubic versions with an up&down effect, it lets you choose color temperature and power with GU10 bulbs while maintaining an elegant beam. Simple, flexible, and perfect for façades, entrances, and walls.



IP
54

IK
08

AL
BODY


GLASS
DIFFUSER


CB

RETILAP

	W	Holder	V
russia round			
● 2.2041.1190	35	GU10	100-240
● 2.2041.1390	35	GU10	100-240
russia round up . down			
● 2.2043.1190	2x35	GU10	100-240
● 2.2043.1390	2x35	GU10	100-240
russia square			
● 2.2042.1190	35	GU10	100-240
● 2.2042.1390	35	GU10	100-240
russia square up . down			
● 2.2044.1190	2x35	GU10	100-240
● 2.2044.1390	2x35	GU10	100-240

Lámpara GU10 no incluida.
GU10 bulb not included.
Lampe GU10 non incluse.

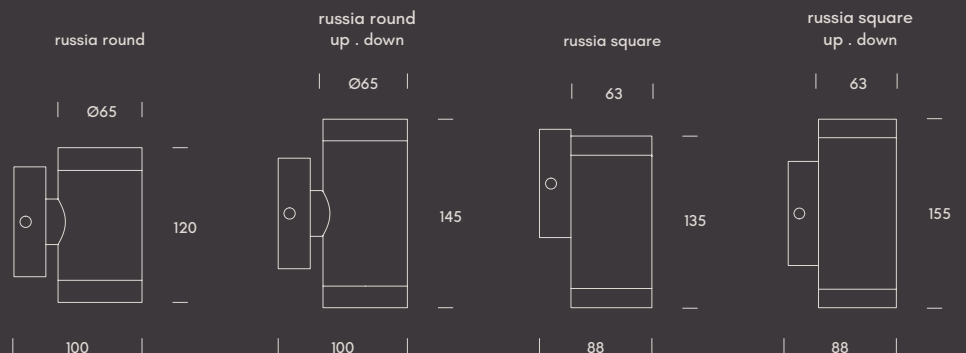

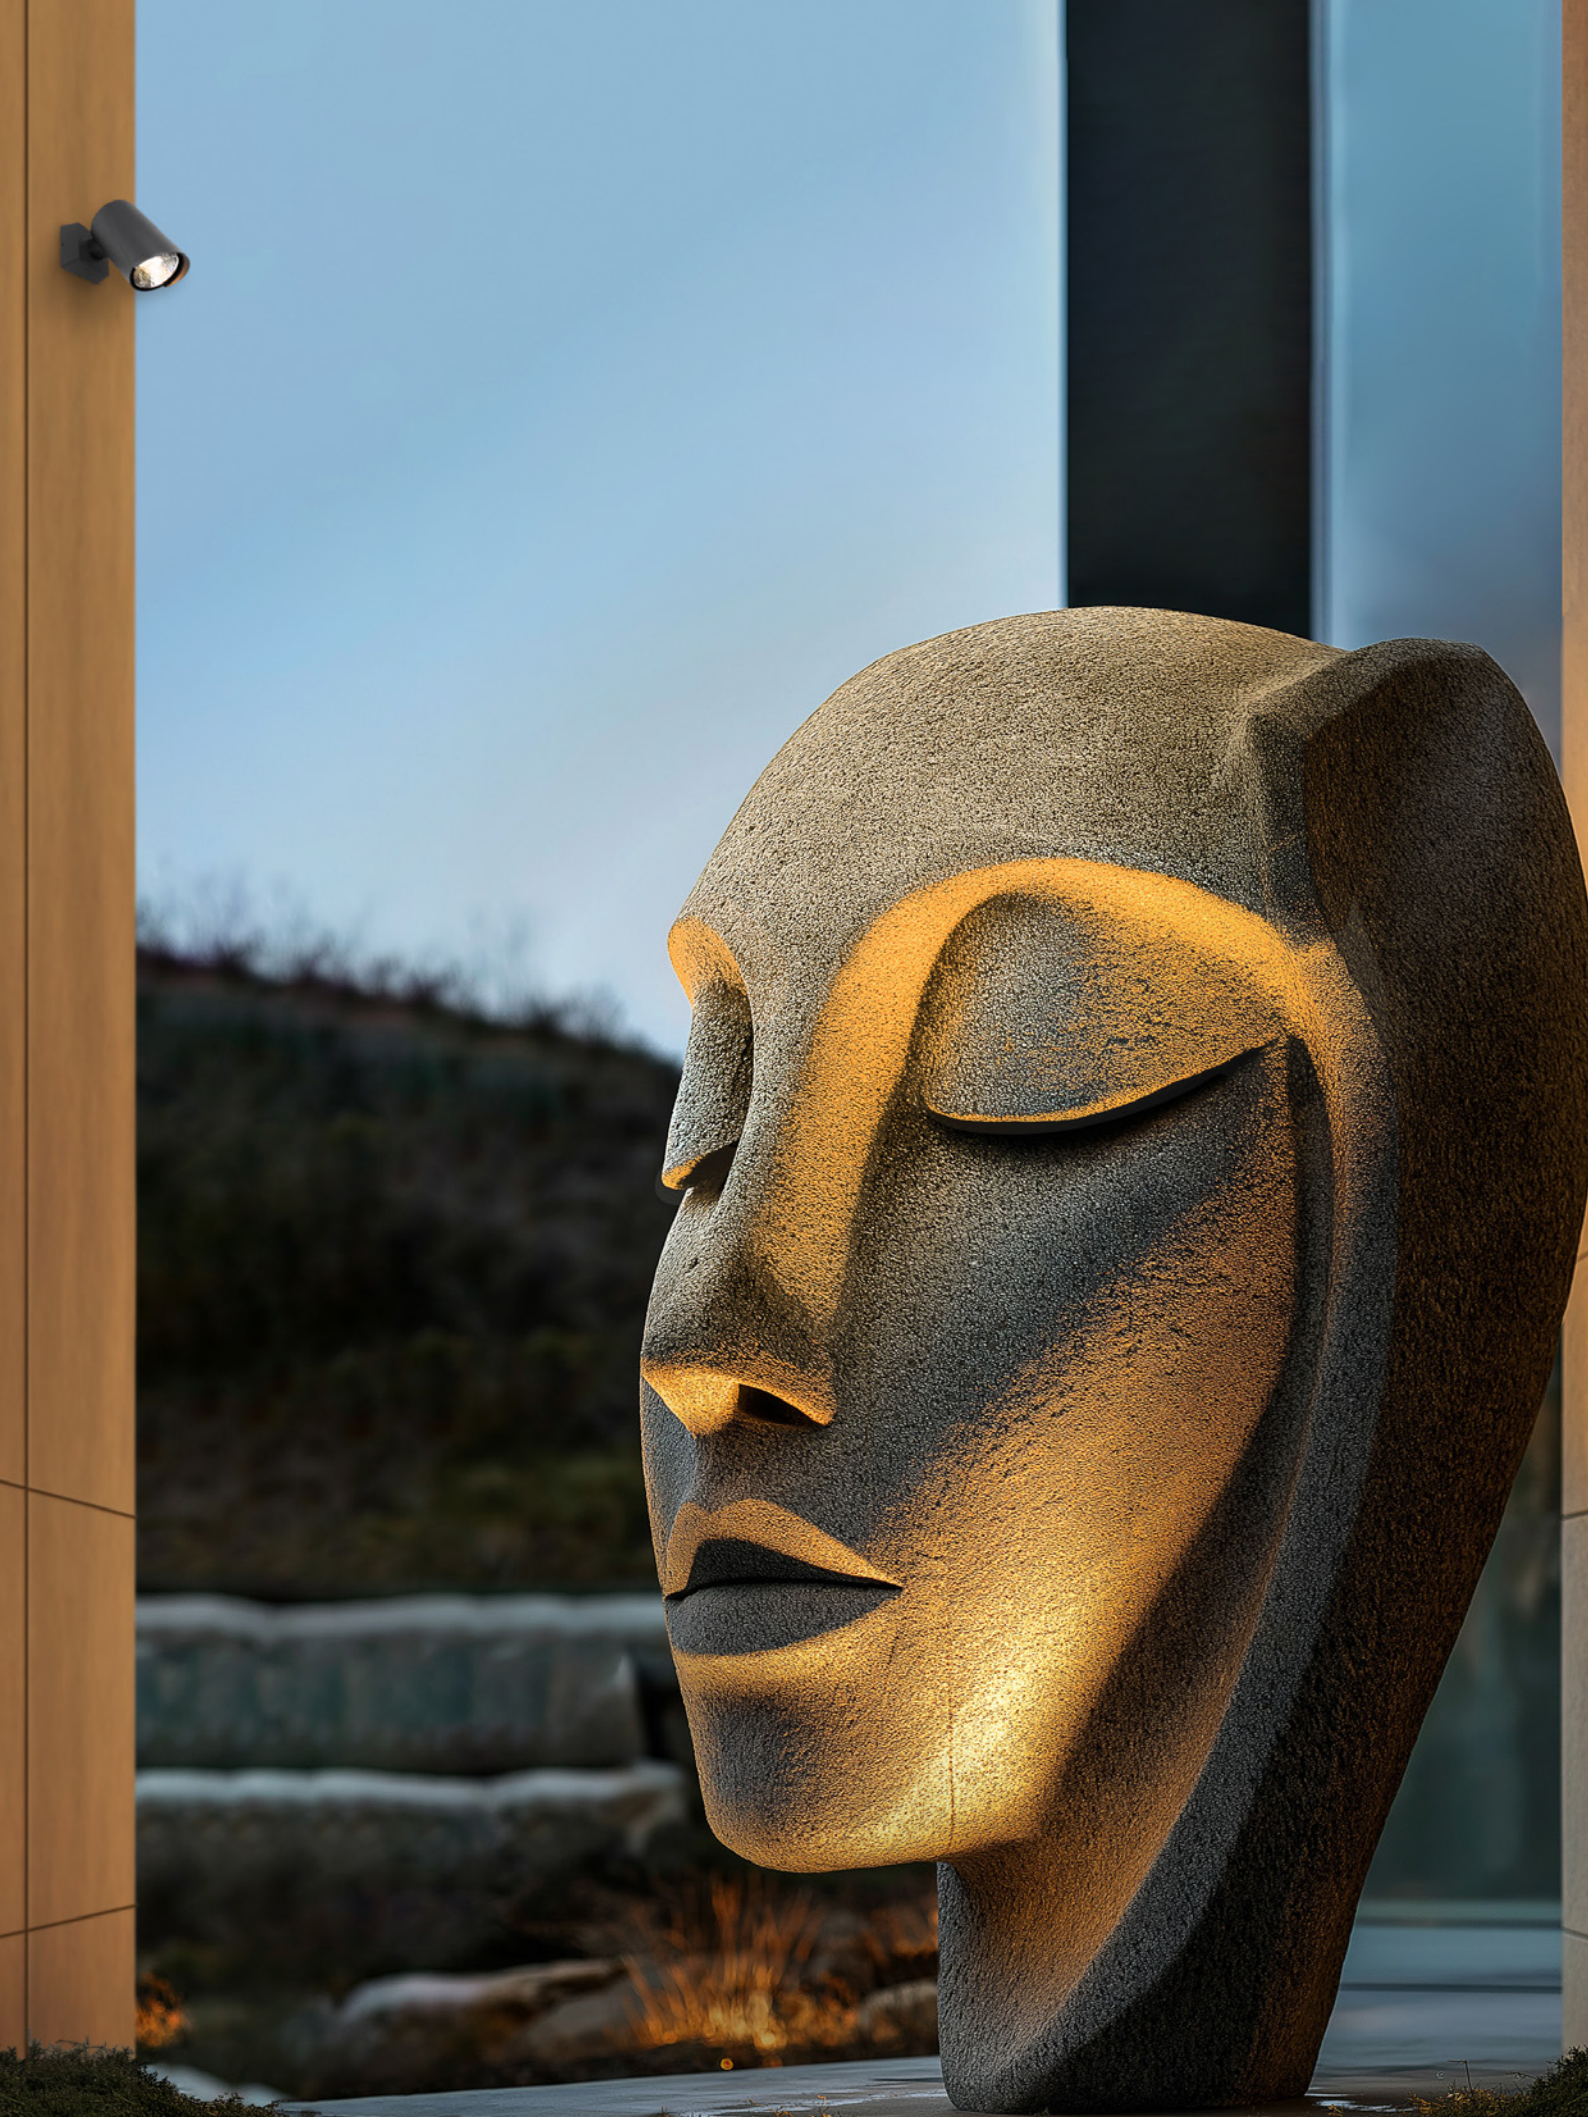

cuba.

base

Cuba accentuates architectural and landscape details with a narrow 13° beam. Perfect for highlighting palm trees, sculptures, or columns, it can be installed with base or spike and adapts to any surface, whether wall or ground. Its compact design ensures subtle integration and striking results in outdoor spaces.


IP 65 IK 06 CRI >80 PF >0,8 DRIVER INCL 50.000H LIFE FLICKER FREE SEA SIDE SUITABLE 110° AL BODY GLASS DIFFUSER CB RETILAP

	W	K	Real lm	▲	V
● 2.5223.1312	13	3000	1100	13°	100-240



Related products

cuba spike
page 267

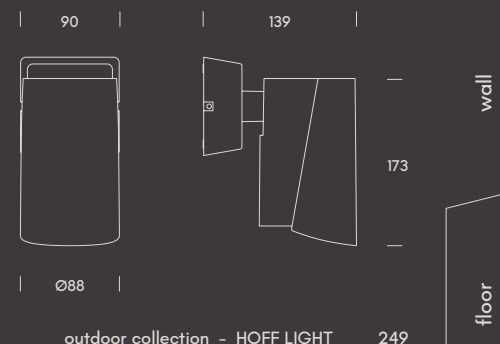




ecuador.

wall & ceiling

Ecuador gives you full control over outdoor lighting direction. Its clean, solid design allows precise beam orientation, adapting naturally to the needs of each project. Available as a wall fixture or bollard, it integrates seamlessly into gardens, terraces, and pathways. Built to withstand demanding conditions, it delivers reliable performance even in coastal installations with >1000h SST (Salt Spray Test).




	W	Holder	V
● 2.3091.1390	7	GU10 LED	100-240
● 2.3091.1690	7	GU10 LED	100-240

Lámpara GU10 no incluida.
 GU10 bulb not included.
 Lampe GU10 non incluse.

ACCESSORIES

● 2.5220.8001	Honeycomb	1
---------------	-----------	---



1



Related products

ecuador bollard
 page 311




Ø60






uruguay.

Uruguay is a ground marker that blends geometry with simplicity. Its circular body with an oval opening casts a warm 45° beam in 3000K, guiding pathways with subtle elegance. Made of aluminum with IP65 - IK08 protection, it withstands weather and daily use. Available in white or anthracite, it adds a discreet yet precise touch of light to facades and walkways.


 IP 65 IK 08 CRI >80 DRIVER INCL PF >0,4 50.000H LIFE AL BODY **CB** · RETILAP

	W	K	Real lm	▲	V
● 2.4001.1112	3	3000	200	45°	100-240
● 2.4001.1312	3	3000	200	45°	100-240

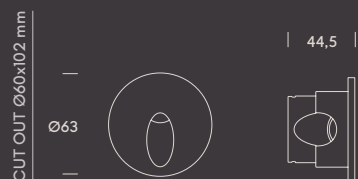




estepona.


universal box

Estepona is a discreet solution that understands circulation as part of the project. Its compact design, available in round and square formats, fits directly into standard junction boxes, making integration easy in new builds or existing installations. Light emerges softly and in a controlled way, guiding movement in stairways and passage areas, indoors and outdoors.



	W	K	Real lm	▲	V
estepona round					
● 2.4002.1112	1,5	3000	65	85°	220-240
● 2.4002.1312	1,5	3000	65	85°	220-240
● 2.4002.1612	1,5	3000	65	85°	220-240
estepona square					
● 2.4003.1112	1,5	3000	75	85°	220-240
● 2.4003.1312	1,5	3000	75	85°	220-240
● 2.4003.1612	1,5	3000	75	85°	220-240

Apto para cajetín universal. No incluido.
 Suitable for universal recessed box. Not included.
 Convient aux boîtes d'encastrement universelles. Non incluses.

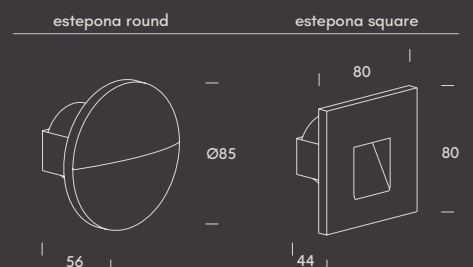



bergen.

recessed . surface

Bergen highlights steps and walkways with a precise and discreet glow. Its aluminum body and timeless design make it both elegant and durable. The rear CCT switch allows easy color temperature adjustment without dismantling. Available in three finishes, it blends seamlessly into projects where low light pollution is essential, and pairs perfectly with Aalborg or Stockholm.



IP 65

IK 07

CRI >80



DRIVER INCL

PF >0,5

50.000H LIFE



SEA SIDE SUITABLE

surface




AL BODY

GLASS DIFFUSER

CB

RETILAP

	W	K (4CCT)	Real lm (2K2-2K7-3K2-4K)	▲	V
bergen recessed					
● 2.4023.1118	5	2K2-2K7-3K2-4K	270-290-310-320	60°	220-240
● 2.4023.1318	5	2K2-2K7-3K2-4K	270-290-310-320	60°	220-240
● 2.4023.1618	5	2K2-2K7-3K2-4K	270-290-310-320	60°	220-240
bergen vertical surface					
● 2.4024.1118	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240
● 2.4024.1318	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240
● 2.4024.1618	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240

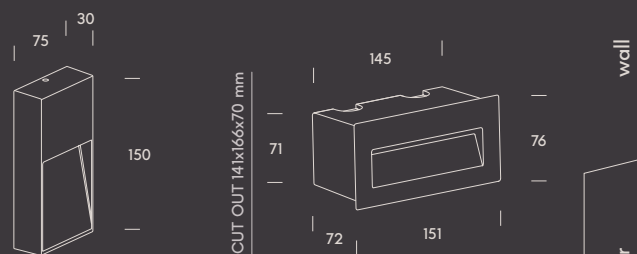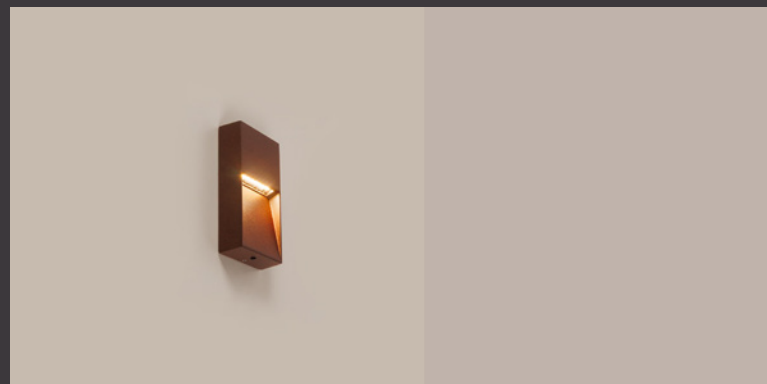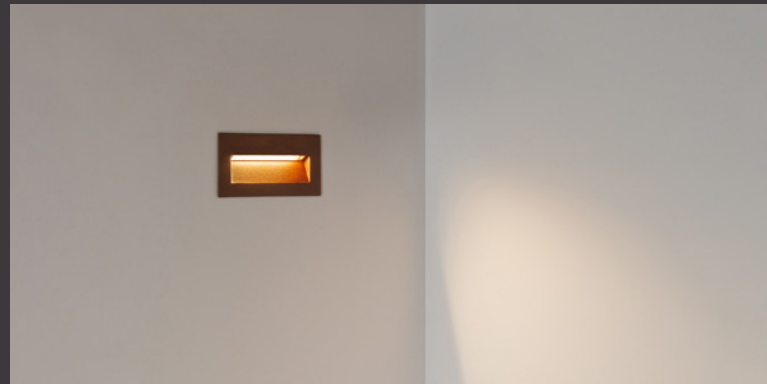

The image shows three circular wall washers mounted on a dark, textured wall. The lights are arranged in a diagonal line from the bottom left towards the top right. Each light fixture is dark and circular, with a bright white light emanating from its center, creating a soft glow on the wall. The background is a dark, textured wall, and the lighting creates a strong contrast between the dark surface and the bright light from the fixtures.

athens.

Athens is a family of wall washers designed to blend seamlessly into architecture. With multiple versions recessed or surface-mounted, in pure shapes like circle, square, or rectangle it offers a flexible tool for design.



wall

floor


athens.

recessed . surface


Athens is a family of wall washers designed to blend seamlessly into architecture. With multiple versions recessed or surface-mounted, in pure shapes like circle, square, or rectangle it offers a flexible tool for design.




	W	K (4CCT)	Real lm (2K2-2K7-3K2-4K)	▲	V
athens 3 round recessed gen 2					
● 2.4011.1118	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240
● 2.4011.1318	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240
● 2.4011.1618	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240
athens 3 round surface gen 2					
● 2.3501.1118	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240
● 2.3501.1318	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240
● 2.3501.1618	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240
athens 3 square recessed gen 2					
● 2.4012.1118	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240
● 2.4012.1318	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240
● 2.4012.1618	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240
athens 3 square surface gen 2					
● 2.3502.1118	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240
● 2.3502.1318	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240
● 2.3502.1618	3	2K2-2K7-3K2-4K	165-175-185-200	50°	100-240
athens 6 rectangular recessed gen 2					
● 2.4013.1118	6	2K2-2K7-3K2-4K	330-350-375-400	50°	100-240
● 2.4013.1318	6	2K2-2K7-3K2-4K	330-350-375-400	50°	100-240
● 2.4013.1618	6	2K2-2K7-3K2-4K	330-350-375-400	50°	100-240
athens 6 rectangular surface gen 2					
● 2.3513.1118	6	2K2-2K7-3K2-4K	330-350-375-400	50°	100-240
● 2.3513.1318	6	2K2-2K7-3K2-4K	330-350-375-400	50°	100-240
● 2.3513.1618	6	2K2-2K7-3K2-4K	330-350-375-400	50°	100-240
athens 9 round surface					
● 2.3511.1112	9	3K	740	40°	100-240
● 2.3511.1312	9	3K	740	40°	100-240
athens 9 square surface					
● 2.3512.1112	9	3K	740	40°	100-240
● 2.3512.1312	9	3K	740	40°	100-240

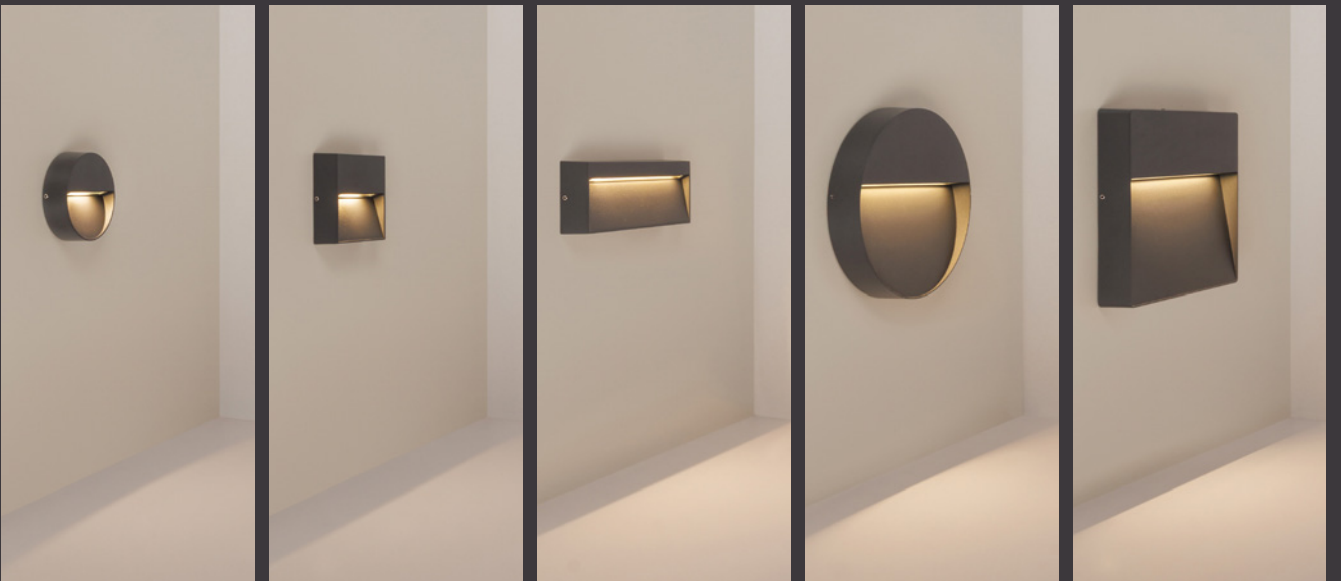

athens round recessed




athens square recessed



athens rectangular recessed




athens round surface

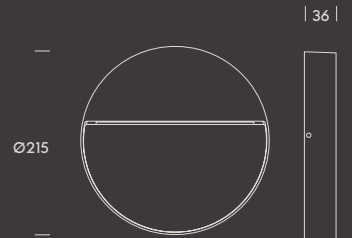

athens round surface




athens square surface



athens rectangular surface



athens square surface





floor

spotlights	cancun.	265
	cuba.	267
	mexico.	269
	belgium.	271
	cannes.	273
	haiti.	275
	netherlands.	277
inground fixtures	cancun.	279
	bulgaria.	281
	morocco.	283
	bern.	285
	switzerland.	287
	zürich.	289
	serbia.	291
	ireland.	293
bollards	hungary.	295
	dublin.	297
	stockholm.	299
	aalborg.	301
	versailles.	303
	belize.	305
	cyprus.	307
	jamaica.	309
ecuador.	311	



cancun.

spike

Cancún is a family designed for demanding outdoor projects, from coastal areas to gardens with intensive irrigation. Its compact body in recycled ABS and COB LED deliver a uniform beam, resistant to salinity and chlorine. With IP67 protection, a 1.5 m cable and H₂O Stop system, it's a practical and durable solution that blends naturally into planters, pathways or green areas.




	W	K	Real lm	▲	V
● 2.5207.1212	3	3000	260	36°	100-240



Related products

cancun in-ground
page 279

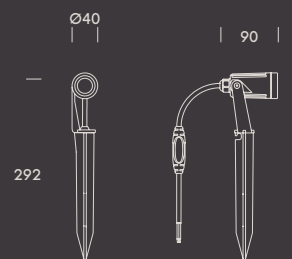




cuba.

spike

Cuba accentuates architectural and landscape details with a narrow 13° beam. Perfect for highlighting palm trees, sculptures, or columns, it can be installed with base or spike and adapts to any surface, whether wall or ground. Its compact design ensures subtle integration and striking results in outdoor spaces.



	W	K	Real lm	▲	V
● 2.5222.1312	13	3000	1100	13°	100-240

ACCESSORIES

● 2.5222.8001	1.5 m strap for trees up to Ø 45 cm*	1
● 2.5222.8002	Joint for strap	2




* Cada correa soporta hasta 3 proyectores.
Cada proyector necesita una pieza de unión para la correa.
Each strap supports up to 3 spotlights.
Each spotlight needs a joint for strap.
Chaque sangle peut supporter jusqu'à 3 spots.
Chaque spot nécessite un raccord pour la sangle.



Related products


cuba base
page 249

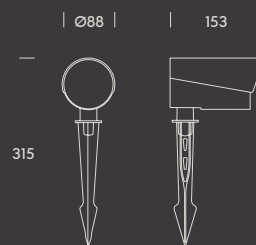



mexico.

Mexico is a family of mini spotlights designed to give you complete freedom outdoors. Its compact, adjustable design makes it easy to direct light exactly where it's needed on façades, ceilings, floors, or gardens, including spike installation. Built for demanding environments and coastal areas, it offers a robust and versatile solution for precise outdoor lighting.



	W	K	Real lm	▲	V
mexico 3					
● 2.5230.1312	3	3000	170	24°	100-240
mexico 6					
● 2.5231.1312	6	3000	500	24°	100-240
mexico 9					
● 2.5232.1312	9	3000	650	24°	100-240

ACCESSORIES

- 2.5230.8001 Visor for mexico 3 1
- 2.5231.8001 Visor for mexico 6 2
- 2.5232.8001 Visor for mexico 9 3
- 2.5230.8002 Spike for mexico 3 4
- 2.5231.8002 Spike for mexico 6 & 9 5





belgium.

A family of projectors designed to bring precision and character to any outdoor space. Available in three sizes and wattages, Belgium delivers a 20° beam that highlights every detail with clarity. With base or spike installation and an optional anti-glare visor, it ensures a practical yet elegant integration.



	W	K	Real lm	▲	V
belgium 3					
● 2.5201.1312	5	3000	210	20°	100-240
belgium 9					
● 2.5203.1312	12	3000	630	20°	100-240
belgium 12					
● 2.5204.1312	14	3000	840	20°	100-240


Pincho de plástico incluido. Visera antideslumbrante extraíble.
 Plastic spike included. Removable anti-glare louvre.
 Piquet en plastique inclus. Visière anti-éblouissante amovible.

ACCESSORIES

- 2.5220.8003 1 m strap for tree up to Ø 30 cm 1



1

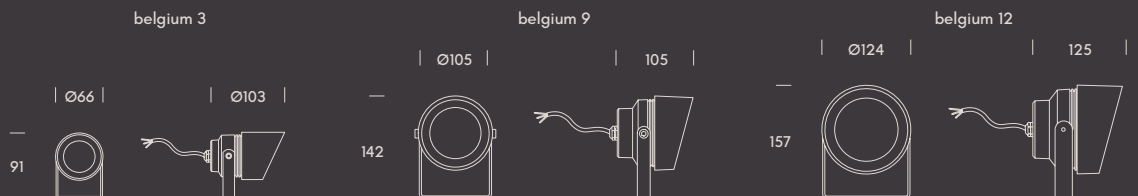



cannes.

Cannes is a spotlight designed for those who value power and reliability outdoors. Available in 11W and 20W versions, it combines a robust aluminum body with a warm 3000K beam. With base or spike installation and IP65 protection, it withstands time while ensuring consistent performance in gardens, facades, and landscapes.



	W	K	Real lm	▲	V
cannes 10					
● 2.5215.1312	11	3000	850	45°	220-240
cannes 20					
● 2.5216.1312	20	3000	1700	75°	220-240


Pincho de plástico incluido.
 Plastic spike included.
 Piquet en plastique inclus.

ACCESSORIES

● 2.5220.8003	1 m strap for tree up to Ø 30 cm	1
---------------	----------------------------------	---



1

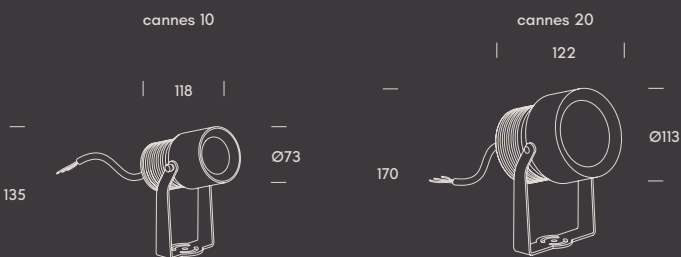




haiti.


zoom

Haiti stands out as one of our most complete outdoor spotlights. Its compact cylindrical design features an adjustable 18°-60° zoom to suit every lighting need. With base or spike installation and the H₂O stop system, it ensures reliability and performance even in demanding conditions.



	W	K	Real lm	▲	V
● 2.5211.1312	11	3000	480	18-60°	100-240
● 2.5211.1612	11	3000	480	18-60°	100-240


Pincho de plástico incluido.
 Plastic spike included.
 Piquet en plastique inclus.

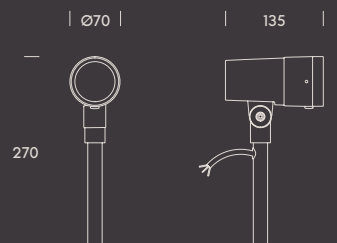



netherlands.

Netherlands is a durable outdoor projector with an aluminum body and glass diffuser, designed to resist weather and time. The H₂O stop system protects the installation, while its GU10 compatibility lets you choose the light source best suited to each project. An optional anti-glare visor enhances comfort and control.





	W	Holder	V
● 2.5220.1390	35	GU10	100-240
● 2.5220.1490	35	GU10	100-240
● 2.5220.1690	35	GU10	100-240

Pincho de plástico incluido. GU10 no incluida.
 Plastic spike included. GU10 bulb not included.
 Piquet en plastique inclus. Lampe GU10 non incluse.

ACCESSORIES

● 2.5220.8001	Honeycomb	1
● 2.5220.8003	1 m strap for tree up to Ø 30 cm	2

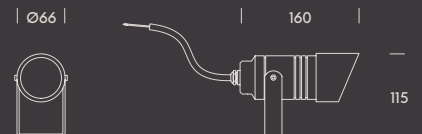



cancun.

in-ground

Cancún is a family designed for demanding outdoor projects, from coastal areas to gardens with intensive irrigation. Its compact body in recycled ABS and COB LED deliver a uniform beam, resistant to salinity and chlorine. With IP67 protection, a 1.5 m cable and H₂O Stop system, it's a practical and durable solution that blends naturally into planters, pathways or green areas.




	W	K	Real lm	▲	V
● 2.4107.1212	3	3000	260	36°	100-240

Cajetín de empotrar incluido.
Recessed box included.
Boîte d'encastrement incluse.



Related products

cancun spike
page 265

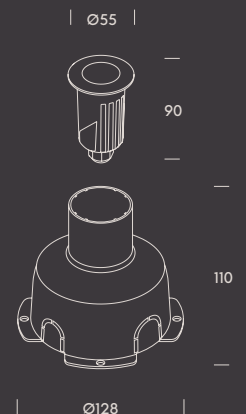



bulgaria.

316 stainless steel

With Bulgaria, we give you a stainless steel uplight with IP67 protection, built to endure. Its 25° beam and 3000K warm light create a precise, welcoming glow, perfect for highlighting architectural details or guiding pathways. Intuitive and timeless, Bulgaria.



IP
67

IK
08

CRI
>90



DRIVER
NO INCL

ON
OFF

50.000H
LIFE

316
INOX

GLASS
DIFFUSER

200 CM




RETILAP

	W	mA	K	Real lm	▲
● 2.4101.1512	1	350	3000	90	25°
	2	700		180	

Cajetín de empotrar incluido.
Recessed box included.
Boîte d'encastrement incluse.

DRIVERS ON-OFF

	W	mA	V
4.1011.1303	3,5	350	100-240
4.3041.1201	EU 1-8	350	100-240
4.1013.1304	3	700	100-240
4.3043.1201	EU 6	700	100-240



concrete	decking
CUT OUT Ø34 mm	CUT OUT Ø32 mm
MIN. HEIGHT 90 mm	MIN. HEIGHT 60 mm



morocco. 316 stainless steel

Morocco is a family of stainless steel uplights with IP67, perfect for outdoors. Available with one or two light openings, its 3000K LED casts a warm glow to highlight paths or details. Compact and durable, Morocco blends timeless design and functionality, ideal for bringing elegance to your projects.




	W	mA	K	Real lm
morocco 1 side				
● 2.4105.0512	1	350	3000	50
	2	700		100
morocco 2 sides				
● 2.4106.0512	1	350	3000	50
	2	700		100

Cajetín de empotrar incluido.
Recessed box included.
Boîte d'encastrement incluse.

DRIVERS ON-OFF

	W	mA	V
4.1011.1303	3,5	350	100-240
4.3041.1201	EU 1-8	350	100-240
4.1013.1304	3	700	100-240
4.3043.1201	EU 6	700	100-240

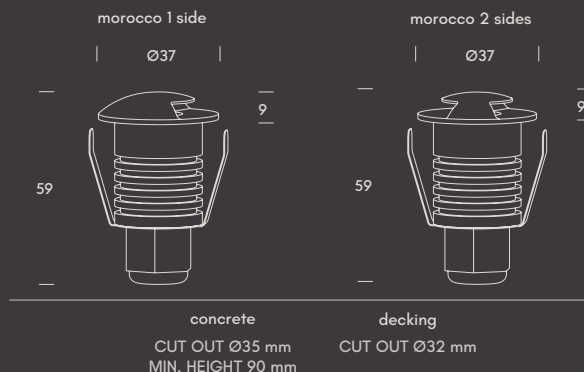



bern.

±15° tiltable

Bern delivers upward light with precision, featuring a ±15° adjustable beam to suit the needs of each project. Its clean, screwless design is made of 316 stainless steel for durability in demanding outdoor environments. Equipped with a pressure compensation valve and H₂O Stop cable, it ensures long-lasting protection and performance.



	W	mA	K	Real lm	▲
● 2.4215.0511	5	500	2700	370	20°
● 2.4215.0512	5	500	3000	390	20°



Válvula de presión incluida.
Pressure equalize valve included.
Valve de pression incluse.

DRIVERS ON-OFF

	W	mA	V
4.1012.1301	4-12	500	100-240
4.3042.1601	EU 1-24	500	100-240

DRIVERS DALI & PUSH

	W	mA	V
4.3042.1301	EU 1-24	500	110-240

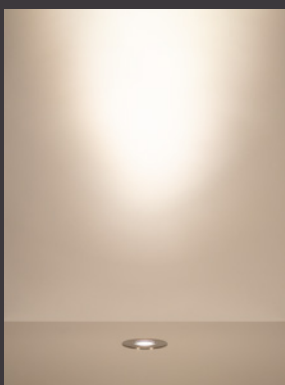


concrete	decking
CUT OUT Ø76 mm	CUT OUT Ø68 mm
MIN. HEIGHT 120 mm	MIN. HEIGHT 90 mm



switzerland.

Available as an 8° superspot or a 20° wallwasher to bathe surfaces with uniform light. Its aluminum body and IP67 protection ensure solid performance and consistency in every application.




	W	mA	K	Real lm	▲
switzerland 8 uplight					
2.4115.0512	8	700	3000	540	8°
switzerland 10 wall washer					
2.4116.0512	10	500	3000	700	20°

Válvula de presión y incluida. Cajetín de empotrar incluido.
 Pressure equalize valve included. Recessed box included.
 Valve de pression incluse. Boîte d'encastrement incluse.

DRIVERS ON-OFF

	W	mA	V
for switzerland 8			
4.1013.1301	12	700	100-240
4.3043.1601	EU 30	700	100-240
for switzerland 10			
4.1012.1301	12	500	100-240
4.3042.1601	EU 24	500	100-240

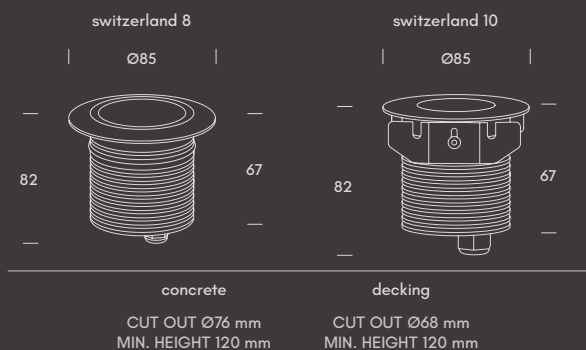



zürich.

24V

A family of uplights that combines power and precision in two versions. With a stainless steel body and screwless front design, it keeps a clean, timeless aesthetic. Equipped with the H₂O Stop system, it delivers reliability and durability for any outdoor project.



	W	K	Real lm	▲	V
zürich 3					
● 2.4130.0512	3	3000	210	36°	24
● 2.4131.0512 with honeycomb	3	3000	195	36°	24
zürich 13					
● 2.4132.0512	13	3000	910	36°	24
● 2.4133.0512 with honeycomb	13	3000	850	36°	24

Válvula de presión y incluida. Cajetín de empotrar incluido.
Pressure equalize valve included. Recessed box included.
Valve de pression incluse. Boîte d'encastrement incluse.


POWER SUPPLY ON-OFF

	W	V	V
for zürich 3			
4.2042.1501	0-20	24	100-240

	W	V	V
for zürich 13			
4.2042.1502	0-60	24	100-240

POWER SUPPLY CASAMBI


	W	V	V
for zürich 3 & 13			
4.9101.5002	0-120	24	90-305

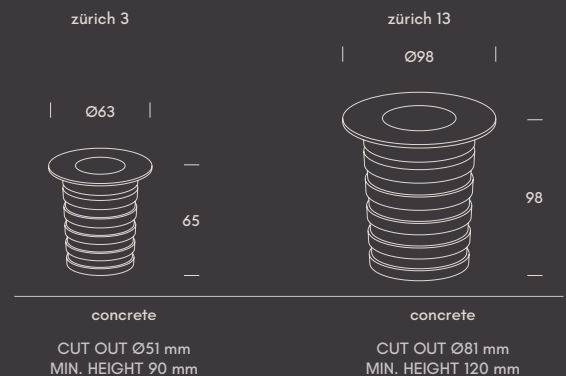




serbia.

Designed to adapt to the demands of each space, this uplight brings together stainless steel strength, IP67 protection, and the H₂O Stop system. Its TRIAC dimming option provides precise light control, making Serbia a versatile and long-lasting choice for outdoor projects.



	W	K	Real lm	▲	V
serbia 9					
● 2.4111.1512	9	3000	720	50°	100-240
serbia 20					
● 2.4112.1512	20	3000	1400	80°	220-240

Cajetín de empotrar incluido.
Recessed box included.
Boîte d'encastrement incluse.

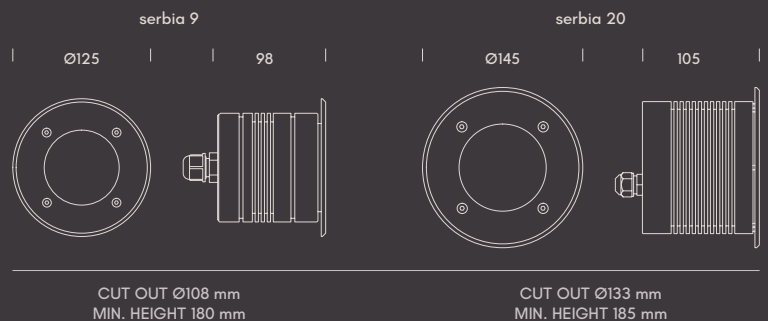



ireland.

With a 105 mm diameter and the option to integrate a GU10 lamp, this uplight offers flexibility for every project. Its stainless steel cover and IP67 protection make it a robust, reliable solution built to last over time.



IP
67

IK
09

AL
BODY

GLASS
DIFFUSER

316
INOX
COVER

CB

RETILAP



2.4120.1590

W

Holder


V

35

GU10

100-240

Cajetín de empotrar incluido. Lámpara GU10 no incluida.
Recessed box included. GU10 bulb not included.
Boîte d'encastrement incluse. Lampe GU10 non incluse.

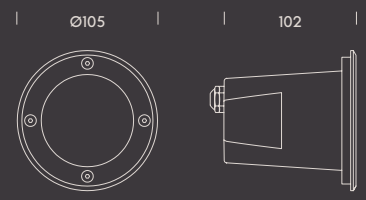

CUT OUT Ø101 mm
MIN. HEIGHT 138 mm



hungary.

tiltable

Minimalism and strength in a single piece. Made of stainless steel with IP67 protection, Hungary blends discreetly into outdoor environments, providing confidence and durability against the most demanding conditions.



IP
67

IK
09



±15°

AL
BODY

GLASS
DIFFUSER

316
INOX
COVER

CB

RETILAP



2.4220.1590

W

Holder


V

35

GU10

100-240

Cajetín de empotrar incluido. Lámpara GU10 no incluida.
Recessed box included. GU10 bulb not included.
Boîte d'encastrement incluse. Lampe GU10 non incluse.













CUT OUT Ø115 mm
MIN. HEIGHT 145 mm




dublin.

surface uplight

Dublin is a family of uplights designed to bring character to outdoor spaces. Available in three versions (with 1, 2, or 3 light openings), it lets you create different lighting effects to highlight pathways or specific areas. Its aluminum body and IP67 protection ensure durability, while the anthracite finish adds a timeless aesthetic.

 IP 67
  IK 10
  CRI >80
  PF >0,5
  DRIVER INCL
  50.000H LIFE
  FLICKER FREE
  AL BODY
  PC DIFUSSER
  CB
  RETILAP

	W	K	Real lm	▲	V
dublin (1 side)					
● 2.4121.1312	6	3000	110	36°	100-240
dublin (2 sides)					
● 2.4122.1312	2x6	3000	140	2x36°	100-240
dublin (4 sides)					
● 2.4124.1312	4x3	3000	205	4x36°	100-240

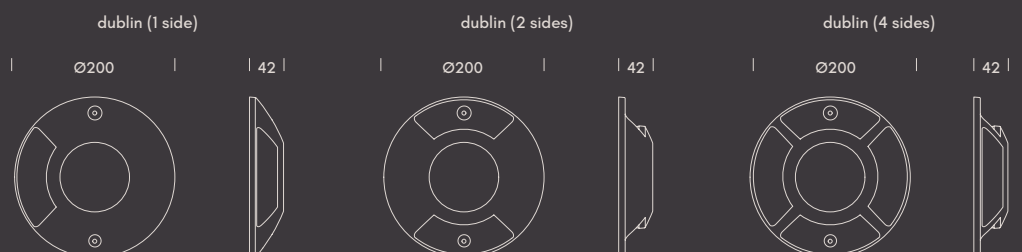



stockholm.

Stockholm brings warmth and character to entrances and pathways, creating a smooth, glare-free lighting effect. Its sleek, timeless design comes in two heights and three finishes, with an accessible 4CCT switch. It can be used as a standalone piece or combined with Bergen for a unified and coherent exterior aesthetic.



IP 65

IK 08

CRI >80



DRIVER INCL

50.000H LIFE

AL BODY

PC DIFFUSER



RETAILAP


	W	K (4CCT)	Real lm (2K2-2K7-3K2-4K)	▲	V
stockholm 350					
● 2.7016.1118	9	2K2-2K7-3K2-4K	580-630-670-710	45°	220-240
● 2.7016.1318	9	2K2-2K7-3K2-4K	580-630-670-710	45°	220-240
● 2.7016.1618	9	2K2-2K7-3K2-4K	580-630-670-710	45°	220-240
stockholm 600					
● 2.7017.1118	9	2K2-2K7-3K2-4K	580-630-670-710	45°	220-240
● 2.7017.1318	9	2K2-2K7-3K2-4K	580-630-670-710	45°	220-240
● 2.7017.1618	9	2K2-2K7-3K2-4K	580-630-670-710	45°	220-240



CCT (2200K, 2700K, 3200K o 4000K)
With lock system to keep the light just as you envisioned it.

stockholm 350

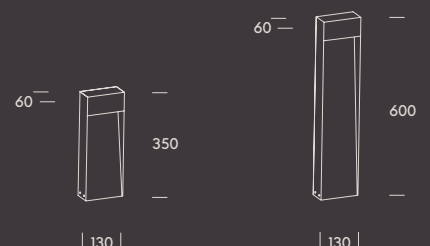






stockholm 600









aalborg.

Aalborg expands light with balance and harmony thanks to its circular, understated design. Made of aluminum and available in two heights, it features an accessible CCT Switch for seamless adjustment. A robust piece built to last, it pairs with Bergen for exterior projects with a unified visual identity.

 IP 65
  IK 08
  CRI >80
  DRIVER INCL
  50.000H LIFE
  AL BODY
  PC DIFFUSER
  CB RETILAP


	W	K (4CCT)	Real lm (2K2-2K7-3K2-4K)	▲	V
aalborg 350					
	2.7011.1318	9	2K2-2K7-3K2-4K	700-770-830-900	90° 220-240
	2.7011.1618	9	2K2-2K7-3K2-4K	700-770-830-900	90° 220-240
aalborg 600					
	2.7012.1318	9	2K2-2K7-3K2-4K	700-770-830-900	90° 220-240
	2.7012.1618	9	2K2-2K7-3K2-4K	700-770-830-900	90° 220-240



CCT (2200K, 2700K, 3200K o 4000K)
With lock system to keep the light just as you envisioned it.

aalborg 350

aalborg 600

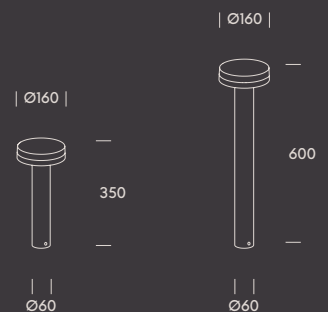



versailles.

customizable
bollard

Versailles is an aluminium bollard that lights without glare, preserving the surroundings and respecting the darkness of the night sky. It comes with two covers shapes (cylindrical or dome), two installation options, and a CCT switch (2200K-3000K).

A discreet and versatile solution to guide the way in your projects.




	W	K (2CCT)	Real lm (2K2-3K)	▲	V
● 2.7019.1318	7	2K2-3K	450-490	120°	220-240

Necesita una cubierta.
Needs a cover.
A besoin d'une couverture

ACCESSORIES		Height (mm)	
● 2.7019.8001	Cylindrical cover	-	1
● 2.7019.8002	Dome cover	-	2
● 2.7019.8005	Base	-	3
● 2.7019.8006	Spike with pedal	220	4
● 2.7019.8007	Pole spike	315	5
● 2.7019.8008	Extension pole	300	6







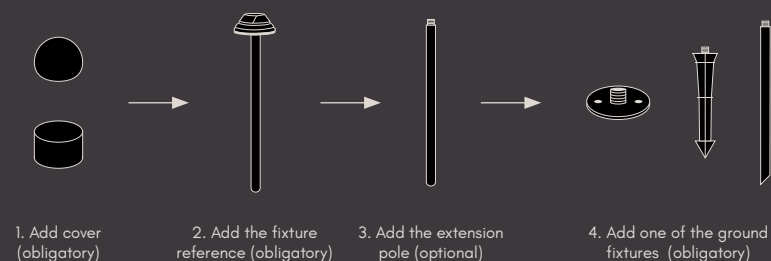





Your own configuration





belize.

Belize guides your steps with a discreet and timeless light. Designed for outdoor pathways and gardens, it blends naturally into the space while ensuring comfort and safety. Its warm glow transforms everyday routes into welcoming experiences, bringing both functionality and charm to your outdoor projects.

 IP 65
  IK 06
  CRI >80
  PF >0,7
  DRIVER INCL
  50.000H LIFE
  FLICKER FREE
  AL BODY
  PC OPAL DIFUSSER
  CB RETILAP

	W	K	Real lm	▲	V
belize 250					
● 2.7020.1311	8	2700	290	360°	100-240
● 2.7020.1312	8	3000	290	360°	100-240
belize 650					
● 2.7021.1311	8	2700	290	360°	100-240
● 2.7021.1312	8	3000	290	360°	100-240



belize 250











belize 650






cypsus.

Cypsus casts a soft 360° glow that gently guides your way. Its slim design and anthracite finish blend seamlessly into gardens and pathways, delivering high visual comfort while creating a welcoming atmosphere in any outdoor space.

 IP 65 ·  IK 08 ·  CRI >80 ·  PF >0,5 ·  DRIVER INCL ·  50.000H LIFE ·  FLICKER FREE ·  AL BODY ·  PC CLEAR DIFUSSER ·  CB · RETILAP











	W	K	Real lm	▲	V
● 2.7015.1112	12	3000	650	360°	100-240
● 2.7015.1312	12	3000	650	360°	100-240





jamaica.

Jamaica combines geometric design with functionality. Its inclined plane directs the light gently toward the ground, illuminating paths and entrances with a modern yet discreet character. Made of aluminum with IP65 protection, it features SMD LEDs and CCT Switch (3000K/4000K) to adapt to every project.

 IP 65 ·
  IK 08 ·
  CRI >80 ·
  PF >0,9 ·
  DRIVER INCL ·
  50.000H LIFE ·
  FLICKER FREE ·
  AL BODY ·
  PC DIFUSSER ·
  CB · RETILAP


	W	K (2CCT)	Real lm (3K-4K)	▲	V
● 2.7013.1318	13,5	3K-4K	1000-1050	120°	100-240



Related products



jamaica wall fixture
page 245

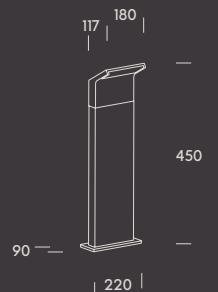




ecuador.

bollard

Ecuador gives you full control over outdoor lighting direction. Its clean, solid design allows precise beam orientation, adapting naturally to the needs of each project. Available as a wall fixture or bollard, it integrates seamlessly into gardens, terraces, and pathways. Built to withstand demanding conditions, it delivers reliable performance even in coastal installations with >1000h SST (Salt Spray Test).




	W	Holder	V
● 2.7025.1390	7	GU10 LED	100-240
● 2.7025.1690	7	GU10 LED	100-240

Lámpara GU10 no incluida.
 GU10 bulb not included.
 Lampe GU10 non incluse.

ACCESSORIES

● 2.5220.8001	Honeycomb	1
---------------	-----------	---




1



Related products

ecuador
 wall & ceiling
 page 251



drivers.

3 YEARS
WARRANTY · CE

On-off	mA	W	V	V _L	IP	LxWxH (mm.)	cut hole
4.1031.1108	120	5	220-240	30-40	20	92x28x21	35
4.1031.1110	150	5	200-240	27-40	20	80x21x17	27
4.1031.1109	180	7	220-240	30-40	20	92x28x21	35
4.1031.1104	250	2,5-6	220-240	10-24	20	84x20x17	27
4.1031.1106	250	7,5-10	220-240	30-40	20	92x28x21	36
4.1031.1105	300	2,5-6	220-240	8-20	20	84x20x17	27
4.1031.1107	300	9-12	220-240	30-40	20	92x28x21	36
4.1031.1101	300	21	220-240	50-70	20	92x36x25	45
4.1069.1102	300-1050	3-42	220-240	9-52	20	97x43x30	53
4.1011.1303	350	3,5	100-240	2,5-10	65	47x23x21	32
4.1069.1101	150-500	6,3-21	200-240	10-42	20	131x43x30	53
4.1022.1101	500	3	100-277	3-7	20	68x33x22	40
4.1032.1103	500	2,5-5	220-240	5-10	20	97x21x21	30
4.1012.1301	500	12	100-240	8-24	65	50x54x24	56
4.1013.1304	700	3	100-240	2,5-4,5	65	47x23x21	32
4.1013.1301	700	4-12	100-240	6-17	65	50x48x24	54
4.1033.1102	700	3	220-240	2,5-4,5	20	84x20x17	27
4.1033.1103	700	6	220-240	4-9	20	84x20x17	27
4.1015.1101	1000	2-4	100-240	2-4	20	68x20x20	29
4.1035.1102	1000	40	220-240	33-40	20	115x41x28	50
1-10V							
4.1025.2101	950	40	100-277	27-42	20	140x65x30	72
Dali & push							
4.1069.6104 (Dali 2)	100-700	0,25-15	220-240	2,5-46	20	113x24x20	32
4.1069.6103	150-700	7-29	200-240	2,5-49	20	132x43x30	53
4.1069.6102 (Dali 2)	150-1050	8-42	220-240	9-52	20	97x43x30	53

5 YEARS
WARRANTY · CE

On-off EU	mA	W	V	V_L	IP	LxWxH (mm.)	cut hole
4.3041.1102	350	6-8	100-240	2-23	20	68x41x22	45
4.3041.1201	350	8	100-240	2-23	54	53x46x26	38
4.3042.1102	500	1-6	100-240	2-12,6	20	68x42x22	47
4.3042.1601	500	24	100-240	2-49	68	121x54x26	60
4.3043.1101	700	3	100-240	3-4,5	20	46x26x23	35
4.3043.1201	700	6	100-240	2-11,5	54	53x46x26	51
4.3043.1601	700	30	100-240	2-43	68	121x54x26	60
4.3069.1103	300-1050	13-40	200-240	5-44	20	146x44x22	50
4.3069.1101	125-500	3-22	200-240	5-44	20	146x44x22	49
4.3069.1102	350-725	15-32	200-240	5-44	20	146x44x22	49
Dali EU							
4.3049.3102	250-700	1-20	100-240	2-43	20	111x52x22	57
4.3042.1301	500	1-24	110-240	2-49	68	107x54x26	61
Dali & push EU							
4.3069.6102	125-500	5,5-22	200-240	10-44	20	146x44x22	49
4.3069.6101 (Dali 2)	300-1050	3-38	220-240	10-54	20	146x44x30	54

power supply.

5 YEARS
WARRANTY · CE

On-off	W	V	V	IP	LxWxH (mm.)	cut hole
4.2042.1501	0-20	24	100-240	67	118x35x26	44
4.2042.1502	0-60	24	100-240	67	162x43x32	54
4.2032.1101	75	24	176-264	20	187x45x30,5	55
4.2032.1102	150	24	198-264	20	254,5x44,5x32	56
4.2034.1102	150	48	220-240	20	227x38x30	50
4.2014.1101	150	48	120-240	20	321x30x18	36
4.2034.1101	240	48	220-240	20	357x32x22,3	34
Dali 2 & push						
4.2062.6101	80	24	176-264	20	290x45x30,5	55
4.2062.6102	150	24	176-264	20	290x45x30,5	55
Triac						
4.2032.7101	60	24	200-240	20	300x30x18,5	36
4.2032.7102	150	24	200-240	20	368x30x22,5	38
casambi						
4.9101.5003	150	24	198-264	20	336,6x30x18,2	35
Bluetooth . casambi						
4.9101.5002	0-120	24	90-305	67	191x63x38	74

emergency kit.

1H


5 YEARS
WARRANTY · CE

4.9231.0101	V	V	IP	LxWxH (mm.)	cut hole
	220-240	10-55	20	112x70x25	75

power	3W	5W	15W	15W	20W	25W	30W	35W	40W
lm	80%	60%	40%	25%	20%	16%	13%	12%	10%

smart lighting.

	mA	W	V	IP	LxWxH (mm.)	cut hole
Casambi 4.9101.5001	300-1050	16-38	10-36	20	147x44x30	54
Zigbee 4.9102.5001	300-1050	16-38	10-36	20	147x44x30	54
Bluelight Link 4.9103.5001	300-1050	16-38	10-36	20	147x44x30	54

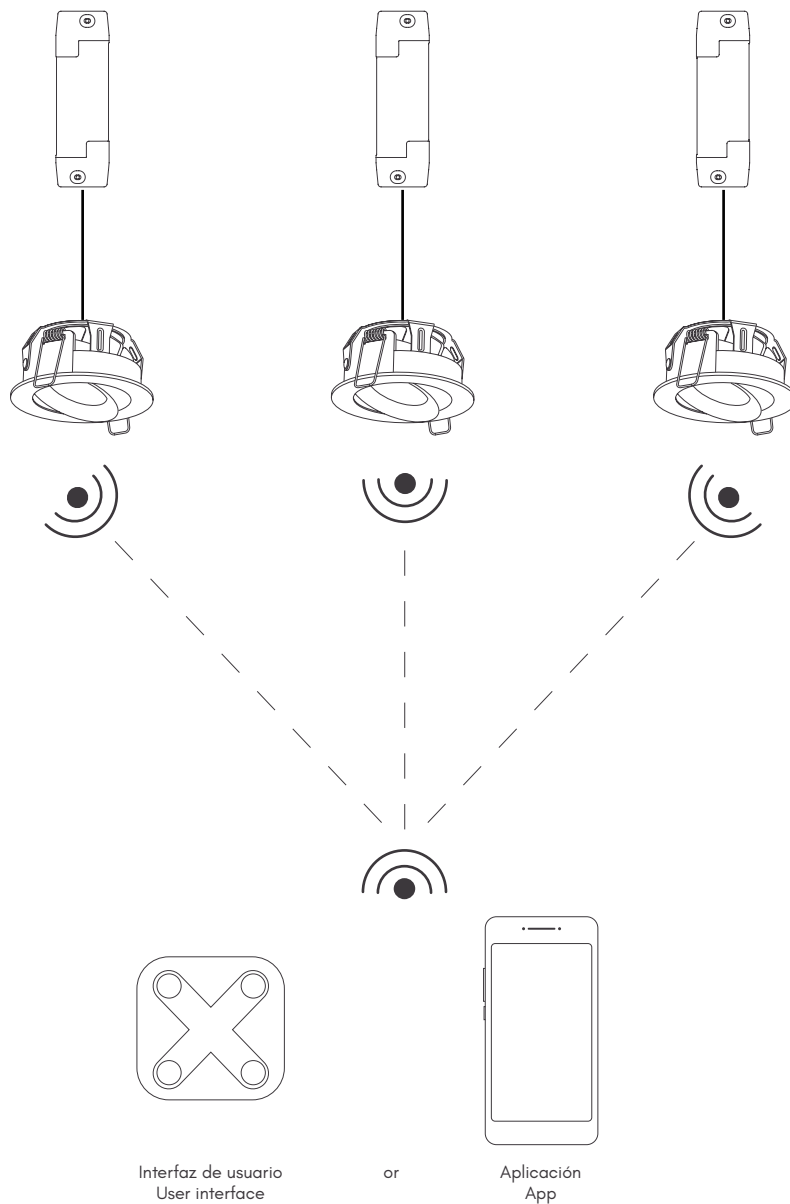

Downlights HOFF LIGHT table: Compatibles with Casambi, Zigbee & Bluetooth Link drivers

Tabla downlights HOFF LIGHT: Compatibles con Casambi, Zigbee & Bluetooth Link drivers

Tableau des luminaires HOFF LIGHT: Compatibles avec les pilotes Casambi, Zigbee & Bluetooth Link

	W	mA	V _f	cut hole	Casambi Ref. 4.9101.5001	Zigbee Ref. 4.9102.5001	Bluetooth link Ref. 4.9103.5001
Vienna 2	2W	700mA	3	Ø19		-	
Vienna 5	5W	350/500mA	9	Ø35		-	
Vienna 10	10W	350/500mA	20	Ø60		from 1 to 2 downlights	
Lima 6	3x2W	300mA	18	75x25		-	
Lima 10	5x2W	300mA	30	115x25		-	
Egypt 5	5W	500mA	9	50x50		-	
Egypt 10	2x5W	500mA	18	90x50		2 downlight	
Egypt 15	3x5W	500mA	27	135x50		1 downlight	
Vietnam	8W	200mA	31	Ø68		-	
Quito	5W	250mA	18	Ø42		-	
Laos 8 gen2	8W	200mA	36	Ø55		-	
Laos 12 gen2	12W	300mA	36	Ø75		1 downlight	
Laos 20 gen2	20W	500mA	36	Ø90		1 downlight	
Qatar 8	8W	200mA	35	Ø50		-	
Qatar 12	12W	300mA	35	Ø70		1 downlight	
Florence 8 gen2	8W	180mA	36	Ø55		-	
Florence 12 gen2	12W	300mA	36	Ø75		1 downlight	
Norway 9 gen2	9W	250mA	34	Ø112		-	
Norway 15 gen2	15W	350mA	34	Ø145		1 downlight	
Norway 20 gen2	20W	500mA	36	Ø165		1 downlight	
Norway 9 square gen2	9W	250mA	34	105x105		-	
Norway 15 square gen2	15W	350mA	34	135x135		1 downlight	
Norway 20 square gen2	20W	500mA	36	160x160		1 downlight	
Boston 10	10W	350mA	26	Ø90		from 1 to 2 downlights	
Boston 20	19W	700mA	26	Ø145		1 downlight	
Boston 25	25W	700mA	35	Ø195		1 downlight	
Boston 32	32W	900mA	35	Ø195		1 downlight	
Zermatt 5	5W	250mA	19	Ø45		-	
Zermatt 7	7W	350mA	18	Ø60		from 1 to 2 downlights	
Palermo 3	3W	700mA	3	48x45		-	
Palermo 6	6W	700mA	6	122x44		-	
Luxembourg 3	3W	700mA	3	Ø30		-	
Luxembourg 5	5W	1050mA	3	Ø40		-	
Amsterdam gen2	7W	180mA	36	Ø76		-	
Hawaii 8	8W	200mA	36	Ø65		-	
Hawaii 12	12W	300mA	36	Ø80		1 downlight	
Taiwan Round	7-10W	180-250mA	36	Ø76		-	
Taiwan Square	7-10W	180-250mA	36	70x70		-	
Colombia 10	10W	250mA	33	97x97		-	
Colombia 20	20W	450mA	41	183x97		1 downlight	
Osaka	15W	350mA	36	Ø75		1 downlight	
Capril 5	5W	150mA	36	Ø36		-	
Andorra 3 zoom	3W	700mA	3	Ø38		-	
Andorra 5	5W	120mA	36	Ø35		-	
Andorra 7	7W	180mA	36	Ø45		-	
Andorra 12 gen2	12W	300mA	36	Ø90		1 downlight	
Andorra 20 gen2	20W	500mA	36	Ø120		1 downlight	
Andorra 30 gen2	30W	700mA	36	Ø145		1 downlight	
Bonn 14	14W	350mA	36	Ø80		1 downlight	
Bonn 20	20W	500mA	36	Ø80		1 downlight	
Bonn 28	28W	700mA	36	Ø80		1 downlight	
Mini Malta 7	7W	180mA	36	Ø45		-	
Malta 8 gen3	8W	200mA	36	Ø70		-	
Malta 12 gen3	12W	300mA	36	Ø70		1 downlight	
Malta 15 gen3	15W	350mA	36	Ø70		1 downlight	
Canada gen2	40W	1000mA	36	595x595		1 downlight	
Graz	7W	350mA	18	Ø45		-	
Romania 20	20W	500mA	36	Ø110		1 downlight	
Romania 30	30W	700mA	36	Ø150		1 downlight	


smart lighting.

casambi
bluetooth devices

Wireless technology to control your luminaires
Tecnología inalámbrica para controlar tus luminarias
Technologie sans fil pour contrôler vos luminaires



APP CASAMBI

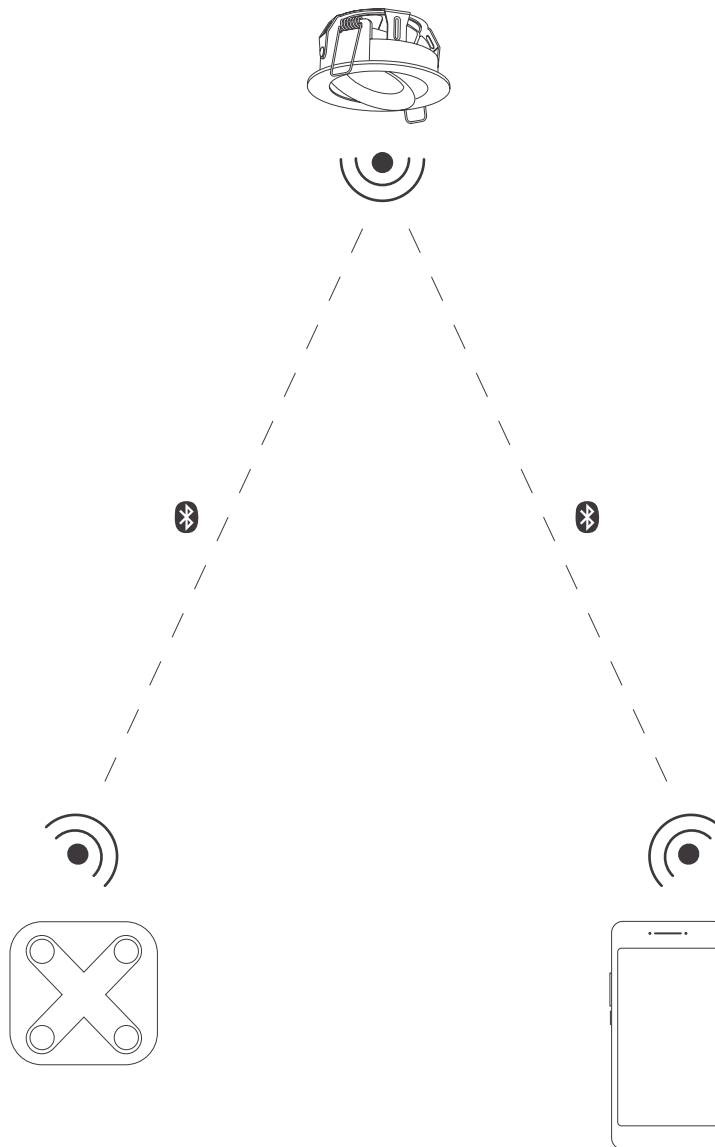

botonera . switch . changer

4.9101.1001	White Bluetooth Xpress Switch	Botonera Xpress Bluetooth Blanca	Clavier blanc Xpress Bluetooth	1
4.9101.1002	Black Bluetooth Xpress Switch	Botonera Xpress Bluetooth Negra	Clavier noir Xpress Bluetooth	2
4.9101.1003	Bluetooth double flat push switch	Doble pulsador plano Bluetooth	Interrupteur double Bluetooth	3



1



2



3

control on-off . on-off control . contrôler on-off

4.9101.2001	Bluetooth Relay INA 10A	Rele Bluetooth INA 10A	Relais Bluetooth INA 10A	4
-------------	-------------------------	------------------------	--------------------------	---



4

control dali . dali control . contrôler dali

4.9101.2002	DALI dimmer 50 devices up to 8 channels	Dimmer DALI 50 equipos hasta 8 canales	Variateur DALI 50 appareils jusqu'à 8 canaux	5
-------------	---	--	--	---



5

gateway . gateway . gateway

4.9101.3001	Central Gateway Android Bluetooth	Bluetooth Android Gateway central	Bluetooth Android Gateway central	6
-------------	-----------------------------------	-----------------------------------	-----------------------------------	---



6

sensores . sensor . capteur

4.9101.4001	Recessed Bluetooth light and motion sensor	Sensor de presencia y/o luminosidad Bluetooth de empotrar	Détecteur de présence et/ou de luminosité Bluetooth encastrés	7
4.9101.4002	Surface Bluetooth light and motion sensor	Sensor de presencia y/o luminosidad Bluetooth de superficie	Détecteur de présence et/ou de luminosité Bluetooth de surface	8



































7























8

symbolology.

	ENG	ESP	FR
	Class I	Clase I	Classe I
	Class II	Clase II	Classe II
	Class III	Clase III	Classe III
W	Wattage	Potencia	Puissance
K	Colour temperature	Temperatura de color	Température de couleur
Real lm	Fixture lumens	Lúmenes luminaria	Lumens luminaire
	Beam angle	Ángulo de emisión	Grades halo lumineux
V	Power supply voltage	Tensión de alimentación	Tension d'alimentation
IP XX	Sealing rating	Índice de estanqueidad	Indice d'étanchéité
IK XX	Shock resistance	Resistencia a los golpes	Résistance au choc
CRI >XX	Color rendering index	Índice reproducción cromática	Index de rendu des couleurs
3 STEP MACADAM	LED color precision	Precisión del color del LED	Précision de couleur LED
UGR XX	Unified glare rating	Grado de deslumbramiento	Degré d'éblouissement
 TRIMLESS	Trimless	Trimless	Trimless (encastrement sans garniture)
 DRIVER INCL	Driver included	Driver incluido	Driver inclus
 DRIVER NO INCL	Driver not included	Driver no incluido	Driver non inclus
EU	European driver	Driver europeo	Conducteur européen
FLICKER FREE	Very low light fluctuation	Parpadeo de la luz muy reducido	Papillotement de lumière très bas
PF >X,X	Power factor	Factor de potencia	Facteur de puissance
XX.000H LIFE	Mean life (hours)	Vida útil (horas)	Durée de vie (heures)
ON OFF	Not dimmable	No regulable	Non réglable
 TRIAC  DALI  DALI & PUSH	Dimmable	Regulable	Réglable

	ENG	ESP	FR
	Dimmable	Regulable	Réglable
	Quick connector	Conector rápido	Connecteur rapide
	H2O Stop	H2O Stop	H2O Stop
	Cable length	Longitud del cable	Longeur de câble
	Rotation angle	Ángulo de giro	Angle de rotation
	Tilting angle	Ángulo de basculación	Angle d'inclinaison
	Three phase track	Carril trifásico	Rail triphasé
	Three-phase DALI track	Carril trifásico DALI	Rail DALI triphasé
	Aluminium	Aluminio	Aluminium
	Stainless Steel 316	Acero inoxidable 316	Acier inoxydable 316
	Cement	Cemento	Ciment
	Polycarbonate	Policarbonato	Polycarbonate
	Polyamide	Poliamida	Polyamide
	Glass	Cristal	Verre
	Polymethyl methacrylate	Polimetilmetacrilato	Polyméthacrylate de méthyle
	Polystyrene	Poliestireno	Polystyrène
	Charging port USB	Puerto de carga USB	Prise de charge USB
	Charging port USB (Type C)	Puerto de carga USB (Tipo C)	Prise de charge USB (Type C)
	Charging port micro USB	Puerto de carga Micro USB	Prise de charge micro USB
	Autonomy battery	Autonomía de la batería	Autonomie batterie
	Charger included	Cargador incluido	Chargeur inclus
	Sea side suitable	Adecuado para estar cerca del mar	Adapté au bord de mer

colours.

	ENG	ESP	FR
	white	blanco	blanc
	black	negro	noir
	anthracite	antracita	anthracite
	grey	gris	gris
	corten	corten	corten
	white-black	blanco-negro	blanc-noir
	black-brass	negro-latón	noir-laiton
	gold	oro	or
	brushed gold	oro cepillado	or brossé
	rose gold	oro rosa	or rose
	bronze	bronce	bronze
	brushed bronze	bronce cepillado	bronze brossé
	chrome	chromo	chrome
	brass	latón	laiton
	matt nickel	níquel mate	nickel mat
	electroplated nickel	níquel galvanizado	nickel électrolytique
	electroplated titanium	titanio galvanizado	titane électrolytique
	clear	transparente	transparent
	smoked	ahumado	fumé
	amber	ámbar	ambre

general conditions of sale.

This general condition of sale stipulates the transactions with our clients for this catalogue. Each order placed to HOFFLIGHTS AND BRANDS, S.L. is subject to it, except for explicit approval from our side for any suggested modification.

CUSTOMERS

No sales will be realized to entities which are not confirmed to be set up by law for industrial or correspondent commercial activity. To classify an entity as customer essential information of the company (complete name and address) together with the EU VAT Number or fiscal license has to be remitted to us. In order to grant our customer a financial or trade credit on goods, appropriate commercial and bank references must be submitted to us.

TRADE CREDIT ON GOODS

While no credit has been fixed with a customer, business transactions will be executed rigorously by payment in advance. If deliveries exceed the accorded credit, the proceeding will be equal. Each non-payment or delay of payment cancels the customer's credit availability, impedes possible deliveries while the situation is not arranged. In case of recurrence the credit will be cancelled.

PRICE LIST

The prices are always indicated in the valid price list and revised accordingly to the trade policy. It is subject to modifications without prior notice. The final invoice price is quoted Ex-Works Barcelona (EXW our factory/warehouse in Barcelona). Not included are freight, insurance, handling or installation costs. Prices for special product, not included in the price list, have to be indicated by written offers or pro-forma invoice, to the same conditions as defined in it. Verbal agreements will not be considered.

PAYMENT TERMS

Mode of payments defined by HOFFLIGHTS AND BRANDS, S.L.:

• ADVANCED PAYMENT.

By bank payment at the moment of the order's confirmation.

• PAYMENT AT DELIVERY.

By bank payment at delivery of the order or pick up of the goods from our warehouse.

• CREDIT LINE.

By accepted effects and set up a direct deposits in a bank account with value dates maximum 30 or 60 days from the invoice date. The client should complete the SEPA document. Payment with longer value dates from the mentioned here before could be studied by the bank entity applying the corresponding taxes. Prices according to the price lists and conditions.

RETURNS

Returns without previous authorization, will not be accepted by HOFF Light. The request for return could be made only during the following 30 days after the invoice date. The returned back materials will be charged with 20% as handling costs.

In case the return is caused by material's defect, during the 3 years warranty period, the return should be made by the client with our previous authorization in written form and will be checked by our quality department later. In both cases, the material should be returned back within 15 days after the written authorization and the client has placed the return label with the return number and on visible part of the package. In an opposite way, the return will be rejected by our warehouse.

SHIPMENTS

The shipments will be always made according to the conditions / Incoterms, previously agreed by both parties. The orders will be shipped by the forwarder indicated by the client or in case, we have no this information, by the most convenient for us forwarder.

INCIDENCES

In case the order has been received damaged, the client should mark this in the observations field of the delivery note (as far as provide pictures), in order to be able to claim to the forwarder.

NOTE

In case of legal dispute, contracting parties are subject to the jurisdiction of BARCELONA (SPAIN) renouncing his own legal venue in case of existence.

guarantee policy.

1. Each product has a warranty that is governed according to the policy of each manufacturer. If that is not specified in any of the products, HOFF Light grants 3 years warranty for the fixtures, 5 years warranty for European drivers, always established from the date of delivery.
2. Products of which ones HOFF Light is a distributor, the warranty period shall be as provided by the manufacturer.
3. Return is accepted and becomes effective security must meet the following requirements:
 - To enforce the guarantee on all products of HOFF Light should include a copy of the bill of sale or otherwise of the packing slip.
 - Any return / repair shall be conducted in our administrative department by a return authorization number and the corresponding authorization for the subsequent reception and storage at our warehouse.
 - Failure to receive return within 15 calendar days, return authorization is canceled and the corresponding payment will be made.
 - If the return is not a failure of the product (samples, changes, material provision...) it must have the original packaging and all accessories. In these cases must be returned within a maximum period of 30 days.
4. Items returned without the documents and information requested will not be accepted.
5. All returns must be effective and confirmed by our Technical Department.
6. Is not covered within the warranty coverage:
 - Handled, opened or altered from its factory products even those who always try to repair HOFF Light that have not previously authorized in writing.
 - Products which to operate have not been installed with material supplied by HOFF Light.
 - Maintenance, repair and/or calibration arising from the use or wear and tear, improper installation or use and external problems.
 - Products with physical harm. This includes scratches on the product and on the glass (if applicable), illegible labels, cracked and broken. Kindly check and review the product at the time of delivery and a refund.
 - Products that for maintenance or cleaning agents using harsh chemicals (hypochlorite, hydrochloric acids...) and/or cleaners that use harsh mechanical elements (rollers, sanders, pressure water cleaners...).
 - If the room temperature exceeds the temperature range of operation (in the technical product sheets) and relative humidity at the facility does not exceed 80 % and must never exceed the IP product category.
 - If the product is subjected to more than 50,000 total fast switching or wiring is subjected to voltage fluctuations within a range that exceeds 230V ± 10%.
7. Physical change of the product is subject to the HOFF Light stock or failing to manufacturer.
8. Under no circumstances installation costs are the responsibility of HOFF Light (to avoid confusion, repair or replace the defective product or part does not include activities, costs or expenses of removal and reinstallation costs or expenses including labor costs)
9. This is a limited warranty and excludes among other things, the installation, access to products (scaffolding, elevators, etc.) and special, incidental and indirect (such as loss of income / earnings, property damage extended or other costs not mentioned above).
10. HOFF Light is not responsible for any damage generated in the transport managed by the client.
11. If the warranty return not applicable HOFF Light will not pay any goods or reset. In this case, the product will be returned to the customer postage due or otherwise, will be destroyed (with these resulting costs).
12. If the product is damaged by a failure of the same (certified by our technical department), HOFF Light agrees to replace the product or refund the same one.
13. The refunds generated in concept of guarantee will be based on the original receipt of the product. The rest of cases (except samples), a 20% demerit will be applied on the net invoiced value.

condiciones generales de venta.

Estas condiciones generales regulan las transacciones con nuestros clientes en este catálogo. Todo pedido cursado a HOFFLIGHTS AND BRANDS, S.L. queda sujeto a las mismas salvo aceptación expresa por nuestra parte de cualquier modificación propuesta.

CLIENTES

No se realizarán ventas a entidades que no acrediten estar legalmente constituidas para la actividad industrial o comercial correspondiente. Para clasificar a una entidad como cliente es necesario que nos remitan los datos básicos de la firma y fotocopias del D.N.I. o C.I.F. y Licencia Fiscal. La concesión de crédito comercial requerirá, además, que se nos faciliten referencias comerciales y bancarias apropiadas.

CRÉDITO COMERCIAL

Mientras no se haya fijado crédito a un cliente las operaciones se realizarán por riguroso contado o pagado en avance. Igualmente se procederá en cuantos suministros sobrepasen el crédito asignado. Todo impagado o retraso en pago anula la disponibilidad de crédito del cliente, paralizándose los posibles suministros en tanto no se regularice la situación. Si esta situación fuera repetitiva se procederá a la cancelación del crédito.

TARIFA

Los precios se indican en las tarifas vigentes en cada momento y se complementan con las políticas comerciales correspondientes. Están sujetos a cambios sin previo aviso. El precio final de la facturación es franco desde nuestro almacén de BARCELONA. No incluyen portes, seguros, desplazamientos ni gastos de instalación. Los productos especiales no incluidos en la lista de precios están sujetos a cotización mediante oferta escrita o factura proforma, en las condiciones que en la misma se determinen. No se tomarán en consideración acuerdos verbales sobre este punto.

CONDICIONES DE PAGO

Las formas de pago establecidas por HOFFLIGHTS AND BRANDS, S.L. son:

• PAGO ADELANTADO.

Transferencia bancaria o equivalente realizada en el momento de la tramitación del pedido del cliente.

• PAGO A LA VISTA.

Transferencia bancaria o equivalente realizada en el momento de la recepción o recogida de la mercancía por parte del cliente.

• CRÉDITO.

Mediante efectos aceptados y domiciliados en una cuenta corriente bancaria con vencimientos de 30 a 60 días como máximo desde fecha factura. El cliente deberá suscribir el formulario de Orden de Domiciliación de Adeudos SEPA. Pueden estudiarse operaciones a mayor plazo de los indicados mediante efectos avalados por la entidad bancaria con el correspondiente recargo financiero. Precios según tarifas y condiciones.

DEVOLUCIONES

HOFF Light no admitirá la devolución de ningún material sin su autorización por escrito. La solicitud de devolución de material sólo podrá hacerse en los 30 días siguientes a la fecha de emisión de la factura y en todo caso se le cargará un 20% de depreciación en concepto de gastos por manejo.

En el caso que la devolución sea por producto defectuoso y siempre y cuando esté dentro de la garantía (3 años) la devolución del material por parte del cliente se hará previa autorización por escrito y su posterior revisión por parte nuestra. En ambos casos, el material deberá ser devuelto dentro de los 15 días siguientes a la aceptación por escrito de devolución y siempre y cuando el cliente ponga a etiqueta con el número de devolución en un lugar visible del embalaje. En caso contrario, nuestro almacén rechazará el material.

ENVÍOS

Los envíos se harán siempre en base a las condiciones de transporte /incoterm acordado entre las partes. La mercancía se remite por la agencia de transportes indicada por el cliente o, en ausencia de este dato, por la que entendamos más conveniente.

INCIDENCIAS

En el caso de llegar la mercancía con golpes, roturas, pérdidas...el cliente tiene la obligación de indicar la observación en el albarán de entrega (y aportar fotos.) con el fin de poder hacer la reclamación oportuna a la agencia de transporte.

NOTA

En caso de disputa legal, las partes se someten a los tribunales y juzgados de BARCELONA (ESPAÑA), renunciando a su propio fuero y domicilio si lo tuviese.

politica de garantía.

1. Cada producto cuenta con una garantía, la cual se rige de acuerdo a la política de cada uno de los fabricantes. En caso de que no sea especificado en alguno de los productos, HOFF Light le otorga 3 años de garantía para las luminarias, 5 años para drivers europeos a partir de la fecha de entrega.

2. En los productos que HOFF Light actúe como distribuidor, el plazo de garantía será el establecido por el fabricante.

3. Para que la devolución sea aceptada y se haga efectiva la garantía, debe cumplir los siguientes requisitos:

- Para poder hacer efectiva la garantía en todos los productos de HOFF Light (cuya garantía rige a partir de la fecha de la facturación) se debe incluir la copia de la factura de venta o en su defecto del albarán de envío.
- Cualquier devolución/reparación deberá tramitarse con nuestro departamento administrativo mediante una autorización de devolución y el consiguiente número de autorización para la posterior recepción y almacenaje en nuestro almacén.
- En caso de no recibir la devolución en un plazo de 15 días naturales, se anulará la autorización de devolución y no se efectuará el abono correspondiente.
- En caso de que la devolución no sea por un fallo del producto (muestras, cambios, material en consignación...) éste deberá disponer de su embalaje original, en perfecto estado con todos sus accesorios, y ser devuelto en un plazo máximo de 30 días.

4. No se aceptará ningún producto devuelto sin los documentos y la información solicitada.

5. Todas las devoluciones serán efectivas una vez validadas por nuestro Departamento Técnico. El cliente es el responsable de seguir las instrucciones y advertencias declaradas en los documentos técnicos (manual instalación, diagrama conexión, fichas técnicas...) asociadas a cada producto, en caso contrario, la garantía quedará anulada.

6. No está contemplado dentro de la cobertura de la garantía:

- Productos manipulados, abiertos o alterados del estado de fábrica incluso aquellos que se intenten reparar siempre que HOFF Light no lo autorice previamente por escrito.
- Aquellos productos que para su funcionamiento no hayan sido instalados con material suministrado por HOFF Light.
- Servicios de mantenimiento, reparación y/o calibración originados por el uso o desgaste del producto, instalación o uso inapropiado y por problemas externos.
- Productos con daño físico. Esto comprende ralladuras en el producto y en el cristal (si procede), etiquetas ilegibles, roturas y golpes. Agradeceremos verificar y revisar el producto al momento de su entrega y de su devolución.
- Aquellos productos que para su mantenimiento o limpieza utilicen agentes químicos agresivos (hipocloritos, ácidos clorhídricos...) y/o aparatos de limpieza que utilicen elementos mecánicos agresivos (rodillos, pulidoras, limpiadores de agua a presión...).
- Si la temperatura ambiente sobrepasa el intervalo de temperatura de funcionamiento (establecido en las fichas técnicas de los productos) y la humedad relativa en la instalación no sobrepase el 80% ni debe sobrepasar nunca la categoría IP del producto.
- Si el producto es sometido a más de un total de 50.000 conmutaciones rápidas ni la instalación eléctrica es sometida a fluctuaciones de tensión dentro de un intervalo que sobrepase 230V ± 10%.

7. El cambio físico del producto estará sujeto a stock de HOFF Light o en su defecto al fabricante del producto.

8. En ningún caso los costes de instalación serán responsabilidad de HOFF Light (a objeto de evitar confusiones, reparar o sustituir el producto o componente defectuoso no incluye las actividades, costes o gastos de extracción y reinstalación incluyendo costes o gastos de mano de obra).

9. La presente es una garantía limitada y excluye entre otros aspectos, la instalación, el acceso a productos (andamios, elevadores, etc.) y los daños especiales, accesorios e indirectos (como la pérdida de ingresos/ganancias, daño a la propiedad u otros costes ampliados no mencionados anteriormente).

10. HOFF Light no se hace responsable por cualquier daño generado en el transporte gestionado por el cliente.

11. En caso de que la devolución por garantía no proceda, HOFF Light no abonará ni repondrá ninguna mercancía. En tal caso, el producto será devuelto al cliente a portes debidos o en su defecto, se destruirá (con los gastos que ello derive).

12. Si el producto está dañado por un fallo del mismo (certificado por nuestro Departamento Técnico), HOFF Light se compromete a cambiarlo o en su defecto realizar abono del producto.

13. Los abonos que se generen en concepto de garantía por material defectuoso se harán en base a la factura original del producto. El resto de casos (excepto muestras), se aplicará un 20% de demérito sobre el valor neto facturado.

conditions générales de vente.

Les présentes conditions générales régissent les transactions avec nos clients dans ce catalogue. Toute commande passée à HOFFLIGHTS AND BRANDS, S.L. est soumise à celles-ci sauf acceptation expresse de notre part de toute modification proposée.

CLIENTS

Aucune vente ne sera réalisée à des sociétés qui ne prouveront pas être légalement constituées pour l'activité industrielle ou commerciale correspondante. Pour qu'une société soit classée comme client, il est nécessaire qu'elle nous remette les informations de base s'y rapportant et les photocopies du D.N.I. ou C.I.F. et sa Licence Fiscale. L'octroi d'un crédit commercial exigera en plus que nous soient fournies les références commerciales et bancaires appropriées.

CRÉDIT COMMERCIAL

Tant qu'un crédit n'aura pas été accordé à un client, les opérations s'effectueront strictement au comptant ou paiement d'avance. On procédera de la même manière concernant les fournitures qui dépasseront le crédit accordé. Tout impayé ou retard de paiement annule la disponibilité du crédit du client, les possibles fournitures seront paralysées tant que la situation n'aura pas été régularisée. En cas de répétition de cette situation, il sera procédé à l'annulation du crédit.

TARIF

Les prix sont indiqués en permanence dans les tarifs en vigueur et sont complétés par les politiques commerciales correspondantes. Ils sont soumis à des changements sans préavis. Le prix final facturé est Ex-works depuis notre entrepôt de BARCELONE. Il n'inclut pas le port, les assurances, déplacements et frais d'installation. Les produits spéciaux non inclus dans la liste de prix sont soumis à négociation au moyen d'une offre écrite ou facture pro forma dans les conditions qui seront déterminées dans celle-ci. On ne prendra pas en considération les accords verbaux sur ce point.

CONDITIONS DE PAIEMENT

Les modalités de paiement établies par HOFFLIGHTS AND BRANDS, S.L. sont:

• PAIEMENT ANTICIPE.

Virement bancaire ou équivalent effectué au moment du traitement de la commande du client.

• PAIEMENT À LA LIVRAISON

Virement bancaire ou équivalent effectué au moment de la réception ou du retrait de la marchandise par le client.

• CRÉDIT.

Par des effets acceptés et domiciliés sur un compte courant bancaire avec des échéances de 30 à 60 jours au maximum à compter de la date de facture. Le client doit souscrire le formulaire d'ordre de domiciliation de prélèvement SEPA. Des opérations à plus long terme peuvent être envisagées au moyen d'effets garantis par l'établissement bancaire avec la majoration financière correspondante. Prix selon les tarifs et les conditions.

RETOURS

HOFF Light n'acceptera pas la restitution de matériel sans son autorisation écrite. La demande de restitution de matériel ne peut être faite que dans les 30 jours suivant la date d'émission de la facture et, en tout état de cause, les frais de dépréciation sont amortis de 20 %.

Dans le cas où le retour est par produit défectueux et pour autant qu'il soit couvert par la garantie (3 ans), le retour du matériel par le client se fait après autorisation écrite et révision par nous. Dans les deux cas, le matériel doit être restitué dans les 15 jours suivant l'acceptation écrite de retour et à condition que le client affiche l'étiquette portant le numéro de retour à un endroit visible de l'emballage. Au cas contraire, notre entrepôt rejettera le matériel.

EXPÉDITIONS

Les expéditions sont toujours effectuées sur la base des conditions de transport/Incoterm convenues entre les parties. La marchandise est expédiée par l'agence de transport indiquée par le client ou, en l'absence de cette donnée, pour laquelle nous comprenons le mieux.

INCIDENCES

En cas de réceptionner la marchandise avec coups, déchirures, pertes... le client est tenu d'indiquer l'observation sur le bon de livraison et de nous fournir des photos.. afin de pouvoir faire la réclamation en temps utile à l'agence de transport.

NOTE

En cas de litige, les parties se soumettent aux Cours et Tribunaux de BARCELONE (ESPAGNE), en renonçant à leur propre juridiction.

politique de garantie.

1. Chaque produit dispose d'une garantie, régie conformément à la politique de chacun des fabricants. Dans le cas où cela n'est pas spécifié dans les produits, HOFF Light accorde une garantie de 3 ans pour tous les luminaires, 5 ans pour les drivers européens, toujours établies à partir de la date de livraison.

2. Pour les produits que HOFF Light agit en tant que distributeur, le délai de garantie est celui fixé par le fabricant.

3. Pour que le remboursement soit accepté et la garantie effective, il doit remplir les conditions suivantes:

- Pour être en mesure de garantir tous les produits du HOFF Light (dont la garantie s'applique à partir de la date de facturation), il faut inclure la copie de la facture de vente ou à défaut du bon d'expédition.

- Toute restitution/réparation doit être traitée avec notre département administratif au moyen d'une autorisation de retour et le numéro d'autorisation correspondant pour la réception et le stockage ultérieur dans notre entrepôt.

- En cas de non-envoyé le matériel dans un délai de 15 jours civils, l'autorisation de retour sera annulée et l'envoi ne sera pas effectué.

- Dans le cas où le retour n'est pas dû à une défaillance du produit (échantillons, changements, matières en consigne...), celui-ci doit disposer de son emballage original, en parfait état avec tous ses accessoires, et être renvoyé dans un délai maximal de 30 jours.

4. Aucun produit renvoyé ne sera accepté sans les documents et les informations demandés.

5. Tous les retours seront effectifs une fois validés par notre département technique.

Le client est responsable du suivi des instructions et avertissements déclarés dans les documents techniques (manuel installation, diagramme de connexion, fiches techniques...) associées à chaque produit, dans le cas contraire, la garantie sera annulée.

6. Ne relève pas de la couverture de la garantie:

- Produits manipulés, ouverts ou altérés de l'état d'usine même ceux qui sont tentés de réparer à condition que HOFF Light ne l'autorise pas préalablement par écrit.

- Les produits qui, pour leur fonctionnement, n'ont pas été installés avec du matériel fourni par HOFF Light.

- Services d'entretien, de réparation et/ou d'étalonnage résultant de l'utilisation ou de l'usure du produit, de l'installation ou de l'utilisation inappropriée et de problèmes externes.

- Produits physiquement endommagés. Il s'agit notamment de rayures sur le produit et sur le verre (le cas échéant), d'étiquettes illisibles, de déchirures et de coups. Nous vous serions reconnaissants de bien vouloir vérifier le produit au moment de sa livraison et de son retour. En ce moment, il est très important de bien signaler sur le bon de livraison les observations du produit endommagé.

- Les produits qui, pour leur entretien ou leur nettoyage, utilisent des agents chimiques agressifs (hydrochlorites, acides chlorhydriques, ...) et/ou des appareils de nettoyage utilisant des éléments mécaniques agressifs (rouleaux, polisseurs, nettoyeurs à eau sous pression...).

- Si la température ambiante dépasse l'intervalle de température de fonctionnement (défini dans les fiches techniques des produits) et l'humidité relative dans l'installation ne dépasse pas 80 % et ne doit jamais dépasser la catégorie IP du produit.

- Si le produit est soumis à plus de 50.000 commutations rapides au total, ni l'installation électrique n'est soumise à des fluctuations de tension dans un intervalle dépassant 230V 10%.

7. Le changement physique du produit est soumis au stock du HOFF Light ou à son défaut au fabricant du produit.

8. En aucun cas les coûts d'installation ne seront à la charge du HOFF Light (afin d'éviter toute confusion, réparation ou remplacement du produit ou composant défectueux, ne comprend pas les activités, les coûts ou les frais d'extraction et de réinstallation, y compris les coûts ou les frais de main-d'œuvre).

9. La présente garantie est limitée et exclut, entre autres, l'installation, l'accès aux produits (échafaudages, élévateurs, etc.) et les dommages spéciaux, accessoires et indirects (comme la perte de revenus/profits, dommages à la propriété ou d'autres coûts étendus non mentionnés ci-dessus).

10. HOFF Light n'est pas responsable de tout dommage causé au transport géré par le client.

11. Dans le cas où le remboursement par garantie ne s'applique pas, HOFF Light ne paiera ni ne remplacera aucune marchandise. Dans ce cas, le produit est restitué au client au port dû, à défaut, détruit (avec les frais qui en découlent).

12. Si le produit est endommagé par une défaillance de celui-ci (certifié par notre département technique), HOFF Light s'engage à le changer ou à ne pas effectuer de compostage du produit.

13. Les avoirs générés au titre de la garantie pour matériel défectueux sont effectués sur la base de la facture initiale du produit. Dans les autres cas (à l'exception des échantillons), 20% de démerites sont appliqués sur la valeur nette facturée.

reference index

reference	page						
1.1005.0112	53	1.1058.0118	31	1.1073.0212	74	1.1120.8107	90
1.1005.0212	53	1.1059.0118	31	1.1074.0111	74	1.1120.8108	90
1.1006.0112	53	1.1060.0112	29	1.1074.0112	74	1.1120.8109	90
1.1006.0212	53	1.1060.0212	29	1.1074.0211	74	1.1120.8110	90
1.1007.0112	53	1.1061.0112	29	1.1074.0212	74	1.1120.8111	90
1.1007.0212	53	1.1061.0212	29	1.1077.0118	79	1.1120.8112	90
1.1015.0111	55	1.1063.7118	41	1.1077.0218	79	1.1120.8113	90
1.1015.0211	55	1.1063.8001	41	1.1077.8001	79	1.1120.8114	90
1.1016.0111	55	1.1063.8002	41	1.1077.8002	79	1.1120.8115	90
1.1016.0211	55	1.1063.8003	41	1.1078.0118	79	1.1120.8116	90
1.1040.0111	26	1.1063.8101	41	1.1078.0218	79	1.1120.8117	90
1.1040.0112	26	1.1065.0111	47	1.1080.0118	61	1.1120.8118	90
1.1040.0211	26	1.1065.0112	47	1.1080.0218	61	1.1120.8119	90
1.1040.0212	26	1.1066.7118	45	1.1082.0112	77	1.1120.8120	90
1.1041.0111	26	1.1066.8001	45	1.1082.0212	77	1.1120.8206	90
1.1041.0112	26	1.1066.8002	45	1.1083.0112	77	1.1120.8207	90
1.1041.0211	26	1.1067.0118	37	1.1083.0212	77	1.1120.8208	90
1.1041.0212	26	1.1067.8001	37	1.1085.0111	73	1.1120.8209	90
1.1041.8003	26	1.1068.0111	67	1.1085.0211	73	1.1120.8212	90
1.1042.0111	26	1.1068.0112	67	1.1090.0118	59	1.1120.8213	90
1.1042.0112	26	1.1070.0112	74	1.1090.0218	59	1.1120.8217	90
1.1042.0211	26	1.1070.0114	74	1.1091.0118	59	1.1120.8218	90
1.1042.0212	26	1.1070.0212	74	1.1091.0218	59	1.1120.8219	90
1.1042.8001	26	1.1070.0214	74	1.1095.0111	69	1.1120.8220	90
1.1042.8003	26	1.1071.0112	74	1.1095.0211	69	1.1121.0118	87
1.1042.8004	26	1.1071.0114	74	1.1095.0911	69	1.1121.8001	87
1.1045.0118	39	1.1071.0212	74	1.1110.0118	50	1.1121.8002	87
1.1045.8001	39	1.1071.0214	74	1.1111.0118	50	1.1121.8003	87
1.1045.8002	39	1.1072.0112	74	1.1112.0118	50	1.1121.8004	87
1.1050.0111	57	1.1072.0114	74	1.1115.0118	50	1.1121.8101	87
1.1050.0112	57	1.1072.0212	74	1.1116.0118	50	1.1121.8102	87
1.1051.0111	57	1.1072.0214	74	1.1117.0118	50	1.1121.8103	87
1.1051.0112	57	1.1073.0111	74	1.1120.8104	90	1.1121.8104	87
1.1055.0118	65	1.1073.0112	74	1.1120.8105	90	1.1121.8105	87
1.1055.0218	65	1.1073.0211	74	1.1120.8106	90	1.1121.8106	87

reference	page						
1.1121.8107	87	1.1142.8006	84	1.2000.8901	100	1.2031.1118	95
1.1122.0218	89	1.1145.0118	43	1.2001.1112	100	1.2032.1118	95
1.1122.8005	89	1.1145.8201	43	1.2001.1212	100	1.2035.1118	95
1.1122.8006	89	1.1146.0118	43	1.2002.1112	100	1.2100.1112	111
1.1122.8007	89	1.1146.8201	43	1.2002.1212	100	1.2100.1212	111
1.1122.8008	89	1.1147.0118	43	1.2004.1112	100	1.2100.7912	111
1.1122.8101	89	1.1147.8201	43	1.2004.1212	100	1.2105.1112	109
1.1123.0218	89	1.1150.7118	63	1.2006.1112	100	1.2105.1212	109
1.1130.7118	35	1.1150.7218	63	1.2006.1212	100	1.2105.7912	109
1.1130.7218	35	1.1150.8001	63	1.2020.1190	104	1.3001.1112	125
1.1131.7118	35	1.1151.7118	63	1.2020.1290	104	1.3001.1212	125
1.1131.7218	35	1.1151.7218	63	1.2020.8000	131	1.3001.1912	125
1.1132.7118	35	1.1151.8001	63	1.2020.8100	113	1.3002.1112	127
1.1132.7218	35	1.1160.0111	32	1.2020.8101	104	1.3002.1212	127
1.1135.0118	81	1.1160.0112	32	1.2020.8101	113	1.3004.1111	129
1.1135.0218	81	1.1160.0114	32	1.2020.8101	157	1.3004.1211	129
1.1136.0118	81	1.1160.0211	32	1.2020.8200	113	1.3005.1190	131
1.1136.0218	81	1.1160.0212	32	1.2021.1190	104	1.3005.1290	131
1.1141.0111	84	1.1160.0214	32	1.2021.1290	104	1.3006.1112	133
1.1141.0112	84	1.1161.0111	32	1.2022.1190	113	1.3006.1212	133
1.1141.0211	84	1.1161.0112	32	1.2022.1290	113	1.3006.8001	133
1.1141.0212	84	1.1161.0114	32	1.2023.1190	104	1.3006.8002	133
1.1141.8001	84	1.1161.0211	32	1.2023.1290	104	1.3006.8003	133
1.1141.8002	84	1.1161.0212	32	1.2024.1190	104	1.3010.1111	137
1.1141.8003	84	1.1161.0214	32	1.2024.1290	104	1.3010.1112	137
1.1141.8004	84	1.1162.0111	32	1.2025.6118	97	1.3011.1111	139
1.1141.8005	84	1.1162.0112	32	1.2025.6218	97	1.3012.1111	139
1.1141.8006	84	1.1162.0114	32	1.2025.8101	97	1.3013.7111	135
1.1142.0111	84	1.1162.0211	32	1.2025.8201	97	1.3013.7112	135
1.1142.0211	84	1.1162.0212	32	1.2026.6118	97	1.3015.1218	141
1.1142.8001	84	1.1162.0212	32	1.2026.6218	97	1.4001.0111	121
1.1142.8002	84	1.2000.1112	100	1.2030.1118	95	1.4003.0111	123
1.1142.8003	84	1.2000.1212	100	1.2030.8101	95	1.4004.0111	122
1.1142.8004	84	1.2000.8101	100	1.2030.8102	95	1.4005.0511	119
1.1142.8005	84	1.2000.8201	100	1.2030.8103	95	1.4005.0512	119

reference index

reference	page						
1.4005.8001	119	1.5000.8170	160	1.5005.2118	146	1.5190.1190	157
1.4005.8002	119	1.5000.8171	160	1.5005.2218	146	1.5190.1290	157
1.4005.8003	119	1.5000.8172	160	1.5005.3118	146	1.5600.8001	176
1.4005.8004	119	1.5000.8173	160	1.5005.3218	146	1.5600.8001	178
1.4005.8005	119	1.5000.8201	158	1.5005.8001	146	1.5600.8201	176
1.4005.8101	119	1.5000.8202	158	1.5006.2118	146	1.5600.8202	176
1.4005.8101	121	1.5000.8203	158	1.5006.2218	146	1.5600.8204	178
1.4005.8101	123	1.5000.8210	158	1.5006.3118	146	1.5600.8205	178
1.5000.8001	158	1.5000.8211	158	1.5006.3218	146	1.5600.8207	180
1.5000.8001	160	1.5000.8212	158	1.5020.7111	153	1.5600.8208	180
1.5000.8002	158	1.5000.8213	158	1.5020.7211	153	1.5600.8210	176
1.5000.8002	160	1.5000.8214	158	1.5020.8001	153	1.5600.8211	176
1.5000.8101	158	1.5000.8216	158	1.5020.8002	153	1.5600.8212	176
1.5000.8102	158	1.5000.8217	158	1.5020.8003	153	1.5600.8213	176
1.5000.8103	158	1.5000.8218	158	1.5020.8005	153	1.5600.8215	176
1.5000.8110	158	1.5000.8218	160	1.5026.1118	151	1.5600.8216	178
1.5000.8111	158	1.5000.8220	158	1.5026.1218	151	1.5600.8217	178
1.5000.8112	158	1.5000.8221	158	1.5026.8001	151	1.5600.8218	178
1.5000.8113	158	1.5000.8252	160	1.5027.1118	151	1.5600.8220	178
1.5000.8114	158	1.5000.8253	160	1.5027.1218	151	1.5600.8221	180
1.5000.8116	158	1.5000.8260	160	1.5027.8001	151	1.5600.8222	180
1.5000.8117	158	1.5000.8261	160	1.5035.1118	155	1.5600.8223	180
1.5000.8118	158	1.5000.8262	160	1.5035.1218	155	1.5600.8225	180
1.5000.8118	160	1.5000.8263	160	1.5035.8001	61	1.5600.8230	176
1.5000.8120	158	1.5000.8264	160	1.5035.8001	155	1.5600.8230	178
1.5000.8121	158	1.5000.8266	160	1.5035.8002	61	1.5600.8230	180
1.5000.8152	160	1.5000.8267	160	1.5035.8002	155	1.5600.8231	176
1.5000.8153	160	1.5000.8270	160	1.5035.8003	61	1.5600.8231	178
1.5000.8160	160	1.5000.8271	160	1.5035.8003	155	1.5600.8231	180
1.5000.8161	160	1.5000.8272	160	1.5035.8005	61	1.5600.8232	176
1.5000.8162	160	1.5000.8273	160	1.5035.8005	155	1.5600.8232	178
1.5000.8163	160	1.5001.2112	149	1.5035.8101	61	1.5600.8233	180
1.5000.8164	160	1.5001.2114	149	1.5035.8101	155	1.5600.8234	176
1.5000.8166	160	1.5001.2212	149	1.5036.1118	155	1.5600.8234	178
1.5000.8167	160	1.5001.2214	149	1.5036.1218	155	1.5600.8234	180

reference	page						
1.5600.8235	176	1.5612.1212	174	1.5700.8222	166	2.2021.1312	207
1.5600.8235	178	1.5612.3211	174	1.5700.8222	168	2.2022.1112	207
1.5600.8235	180	1.5612.3212	174	1.5700.8223	166	2.2022.1312	207
1.5601.1211	172	1.5621.1211	172	1.5700.8223	168	2.2033.1190	211
1.5601.1212	172	1.5621.1212	172	1.5701.1211	164	2.2033.1390	211
1.5601.3211	172	1.5621.3211	172	1.5701.8001	164	2.2033.8001	211
1.5601.3212	172	1.5621.3212	172	1.5702.1211	164	2.2041.1190	247
1.5601.8001	172	1.5632.1211	172	1.5702.8001	164	2.2041.1390	247
1.5602.1211	172	1.5632.1212	172	1.5707.1211	164	2.2042.1190	247
1.5602.1212	172	1.5632.3211	172	1.5711.1211	164	2.2042.1390	247
1.5602.3211	172	1.5632.3212	172	1.5712.1211	164	2.2043.1190	247
1.5602.3212	172	1.5632.8001	172	1.6004.0118	185	2.2043.1390	247
1.5602.8001	172	1.5632.8002	172	1.6004.8001	185	2.2044.1190	247
1.5603.1211	172	1.5632.8003	172	1.6004.8002	185	2.2044.1390	247
1.5603.1212	172	1.5632.8101	172	1.6004.8101	185	2.2050.1118	209
1.5603.3211	172	1.5632.8102	172	1.6101.1414	187	2.2050.1318	209
1.5603.3212	172	1.5632.8103	172	1.6102.1414	187	2.3005.1112	219
1.5603.8001	172	1.5632.8104	172	1.6103.1414	187	2.3005.1312	219
1.5605.1211	174	1.5632.8105	172	1.6151.8003	189	2.3006.1218	216
1.5605.1212	174	1.5632.8106	172	1.6153.2218	189	2.3006.8001	216
1.5605.3211	174	1.5632.8107	172	1.6153.8010	189	2.3006.8002	216
1.5605.3212	174	1.5700.8201	166	1.6153.8011	189	2.3006.8003	216
1.5606.1211	174	1.5700.8202	166	1.6153.8201	189	2.3006.8004	216
1.5606.1212	174	1.5700.8204	168	1.6153.8202	189	2.3006.8005	216
1.5606.3211	174	1.5700.8205	168	1.6153.8204	189	2.3006.8006	216
1.5606.3212	174	1.5700.8211	166	2.1001.0112	205	2.3006.8007	216
1.5607.1211	174	1.5700.8212	166	2.1001.0114	205	2.3006.8008	216
1.5607.1212	174	1.5700.8214	166	2.1002.0112	205	2.3006.8009	216
1.5607.3211	174	1.5700.8216	168	2.1002.0114	205	2.3006.8010	216
1.5607.3212	174	1.5700.8217	168	2.1010.0111	203	2.3006.8011	216
1.5611.1211	174	1.5700.8219	168	2.1010.0112	203	2.3006.8012	216
1.5611.1212	174	1.5700.8220	166	2.1010.0211	203	2.3006.8013	216
1.5611.3211	174	1.5700.8220	168	2.1010.0212	203	2.3006.8014	216
1.5611.3212	174	1.5700.8221	166	2.1010.8001	203	2.3011.1112	229
1.5612.1211	174	1.5700.8221	168	2.2021.1112	207	2.3011.1312	229

reference index

reference	page						
2.3012.1112	229	2.3091.1390	251	2.4023.1618	257	2.5220.8003	271
2.3012.1312	229	2.3091.1690	251	2.4024.1118	257	2.5220.8003	273
2.3025.1112	233	2.3100.1318	245	2.4024.1318	257	2.5220.8003	277
2.3025.1312	233	2.3501.1118	260	2.4024.1618	257	2.5222.1312	267
2.3026.1118	231	2.3501.1318	260	2.4101.1512	281	2.5222.8001	267
2.3026.1318	231	2.3501.1618	260	2.4105.0512	283	2.5222.8002	267
2.3026.1618	231	2.3502.1118	260	2.4106.0512	283	2.5223.1312	249
2.3031.1112	237	2.3502.1318	260	2.4107.1212	279	2.5230.1312	269
2.3031.1312	237	2.3502.1618	260	2.4111.1512	291	2.5230.8001	269
2.3032.1112	237	2.3511.1112	260	2.4112.1512	291	2.5230.8002	269
2.3032.1312	237	2.3511.1312	260	2.4115.0512	287	2.5231.1312	269
2.3042.1118	239	2.3512.1112	260	2.4116.0512	287	2.5231.8001	269
2.3042.1318	239	2.3512.1312	260	2.4120.1590	293	2.5231.8002	269
2.3051.1112	241	2.3513.1118	260	2.4121.1312	297	2.5232.1312	269
2.3051.1312	241	2.3513.1318	260	2.4122.1312	297	2.5232.8001	269
2.3052.1112	241	2.3513.1618	260	2.4124.1312	297	2.7011.1318	301
2.3052.1312	241	2.4001.1112	253	2.4130.0512	289	2.7011.1618	301
2.3055.1112	243	2.4001.1312	253	2.4131.0512	289	2.7012.1318	301
2.3055.1312	243	2.4002.1112	255	2.4132.0512	289	2.7012.1618	301
2.3065.1112	227	2.4002.1312	255	2.4133.0512	289	2.7013.1318	309
2.3065.1312	227	2.4002.1612	255	2.4215.0511	285	2.7015.1112	307
2.3071.1112	223	2.4003.1112	255	2.4215.0512	285	2.7015.1312	307
2.3071.1312	223	2.4003.1312	255	2.4220.1590	295	2.7016.1118	299
2.3072.1112	223	2.4003.1612	255	2.5201.1312	271	2.7016.1318	299
2.3072.1312	223	2.4011.1118	260	2.5203.1312	271	2.7016.1618	299
2.3075.1112	221	2.4011.1318	260	2.5204.1312	271	2.7017.1118	299
2.3075.1312	221	2.4011.1618	260	2.5207.1212	265	2.7017.1318	299
2.3081.1312	225	2.4012.1118	260	2.5211.1312	275	2.7017.1618	299
2.3082.1312	225	2.4012.1318	260	2.5211.1612	275	2.7019.1318	303
2.3085.1118	235	2.4012.1618	260	2.5215.1312	273	2.7019.8001	303
2.3085.1318	235	2.4013.1118	260	2.5216.1312	273	2.7019.8002	303
2.3085.1618	235	2.4013.1318	260	2.5220.1390	277	2.7019.8005	303
2.3086.1118	235	2.4013.1618	260	2.5220.1490	277	2.7019.8006	303
2.3086.1318	235	2.4023.1118	257	2.5220.1690	277	2.7019.8007	303
2.3086.1618	235	2.4023.1318	257	2.5220.8001	277	2.7019.8008	303

<u>2.7020.1311</u>	<u>305</u>
<u>2.7020.1312</u>	<u>305</u>
<u>2.7021.1311</u>	<u>305</u>
<u>2.7021.1312</u>	<u>305</u>
<u>2.7025.1390</u>	<u>311</u>
<u>2.7025.1690</u>	<u>311</u>
<u>2.9003.1118</u>	<u>199</u>
<u>2.9003.1318</u>	<u>199</u>
<u>2.9005.1118</u>	<u>197</u>
<u>2.9006.1118</u>	<u>197</u>
<u>2.9007.1118</u>	<u>195</u>
<u>2.9007.1318</u>	<u>195</u>
<u>2.9007.1618</u>	<u>195</u>
<u>2.9007.8200</u>	<u>195</u>
2.9007.8200	199

Note

The information provided in this catalog, doesn't constitute legal guarantee in terms of properties and/or functionality of the products application. Also, HOFFLIGHTS AND BRANDS, S.L. reserves the right to change at any time and without notice, the technical specifications of our products illustrated in this catalogue, without this affecting the basic characteristics of the product.

Nota

Los datos facilitados en el presente catálogo, en ningún caso constituyen garantía jurídica en cuanto a propiedades y/o funcionalidad de la aplicación de los productos. Además HOFFLIGHTS AND BRANDS, S.L. se reserva el derecho de modificar en cualquier momento y sin previo aviso, las características técnicas de los elementos ilustrados en el presente catálogo, sin que estos afecten a las características básicas del producto.

Remarque

Les données fournies dans ce catalogue ne constituent en aucun cas une garantie juridique pour ce qui est des propriétés et/ou des fonctionnalités de l'application des produits. De plus, HOFFLIGHTS AND BRANDS, S.L. se réserve le droit de modifier les caractéristiques techniques des éléments illustrés dans ce catalogue à tout moment, sans préavis et sans que les caractéristiques d'origine du produit soient altérées par ces modifications.

HOFF LIGHT

HEADQUARTERS

HOFFLIGHTS AND BRANDS, S.L.

C/ dels Oficis, n°25
08850 · Gavà
Barcelona · Spain
T. (+34) 93 630 28 00
M. info@hofflights.com

SUBSIDIARIES

SAUDI ARABIA

Al Bait Building n°3, 2nd Floor, Office n°13
Salah Al-Din Al-Ayoubi Road,
Near Wooden Bakery, Riyadh
T. (+966) 503 28 0670
M. saudi@grupo-mci.com

LATAM

Lima · Perú
T. (+51) 915 335 989
M. latam@grupo-mci.com



RETILAP



Illumination for all possibilities

hofflight.com